


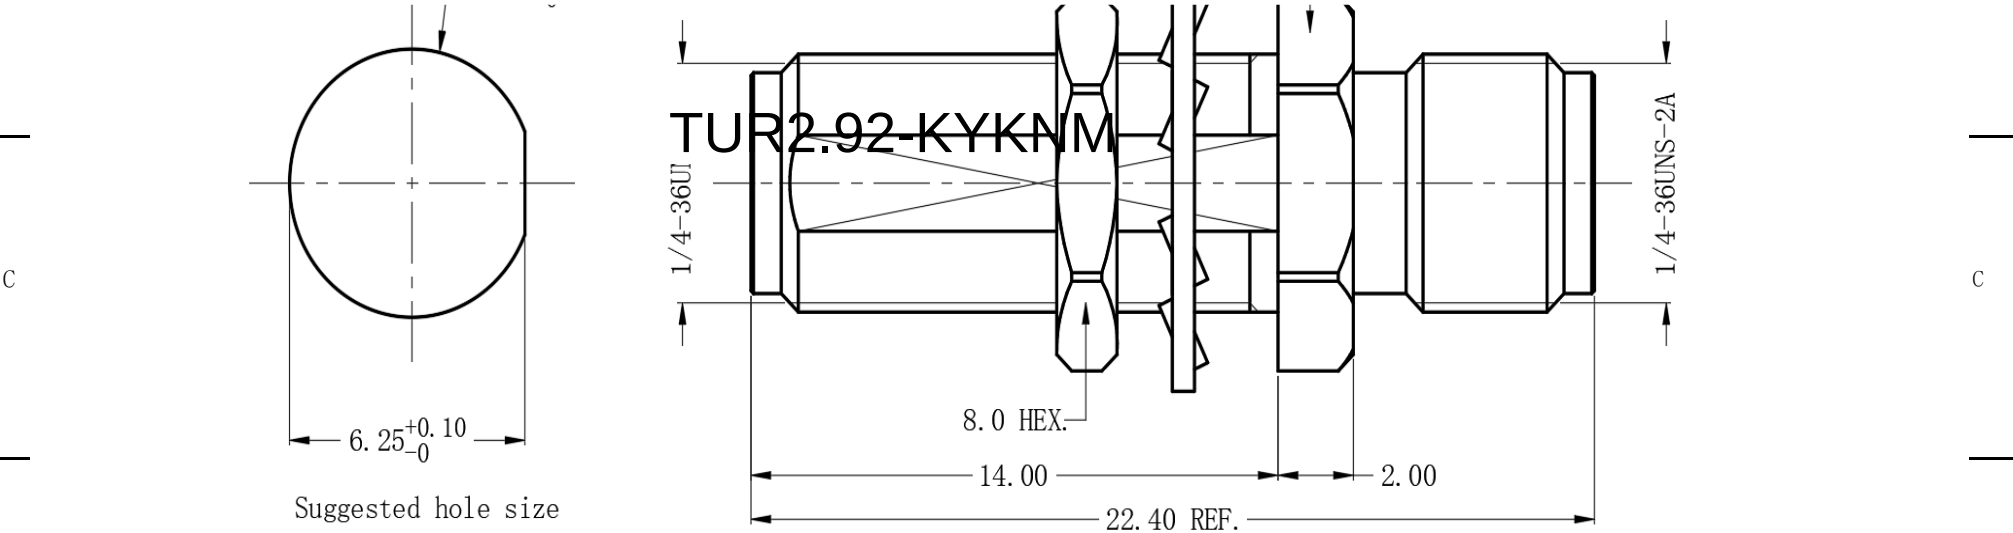

Electrical & Environmental Characteristics	
Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC~40GHz
Dielectric Withstanding Voltage	1000V
VSWR	≤1.25
Insertion Loss	≤0.40dB
Operating Temperature	- 55~+125℃
Material & Coat-Plating	
Inner Conductor	Non-magnetic beryllium copper, Gold Plated
Dielectric	PEI

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Turpanic Co, Ltd		,Inc
		CHK			
Unit	TOLERANCES UNLESS APVD		Product Model		
mm	OTHERWISE SPECIFIED		2.92-KYK-NM		
	0 PLC	±0.25	PRODUCT SPEC	2.92mm Female to 2.92mm Female bulkhead adaptor with non-magnetic	
	1 PLC	±0.15			
	2 PLC	±0.12			
	3 PLC	±-			
	3 PLC	±-	APPLICATION SPEC		
	ANGLES	±1°			
			SIZE	GAGE CODE	DRAWING NO
			A4	0T8L4	A
MATERIAL	FINISH	WEIGHT			
SEE TABLE	SEE TABLE				