

TURLA0.5G40G-2850

TURLA0.5G40G-2850 is a low noise amplifier with a typical small signal gain of 28 dB and a nominal noise figure of 5.0 dB across the frequency range of 0.5 to 40 GHz. The DC power requirement for the amplifier is +12 V DC/400 mA. The input and output port configuration offers coax adapter structure with 2.92mm female.

Features:

- Frequency range: 0.5-40GHz
- Gain: 28dB Typ
- Noise Figure: 5.0dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	0.5		40	GHz
小信号增益 Small Signal Gain	25	28		dB
增益平坦度 Gain Flatness		±2.0	±2.5	dB
噪声系数 Noise Figure		5.0		dB
线性输出功率 Output P1dB		17		dBm
输出三阶交调 Output IP3		30		dBm
输入驻波 Input VSWR		1.8	2.5	:1
输出驻波 Output VSWR		1.8	2.5	:1
直流电压 DC Voltage		+12		V DC
直流电流 DC Supply Current		400		mA
阻抗 Impedance		50		Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	2.92mm Female/2.92mm Female	

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	TBD
输入功率 RF Input Power	-5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm

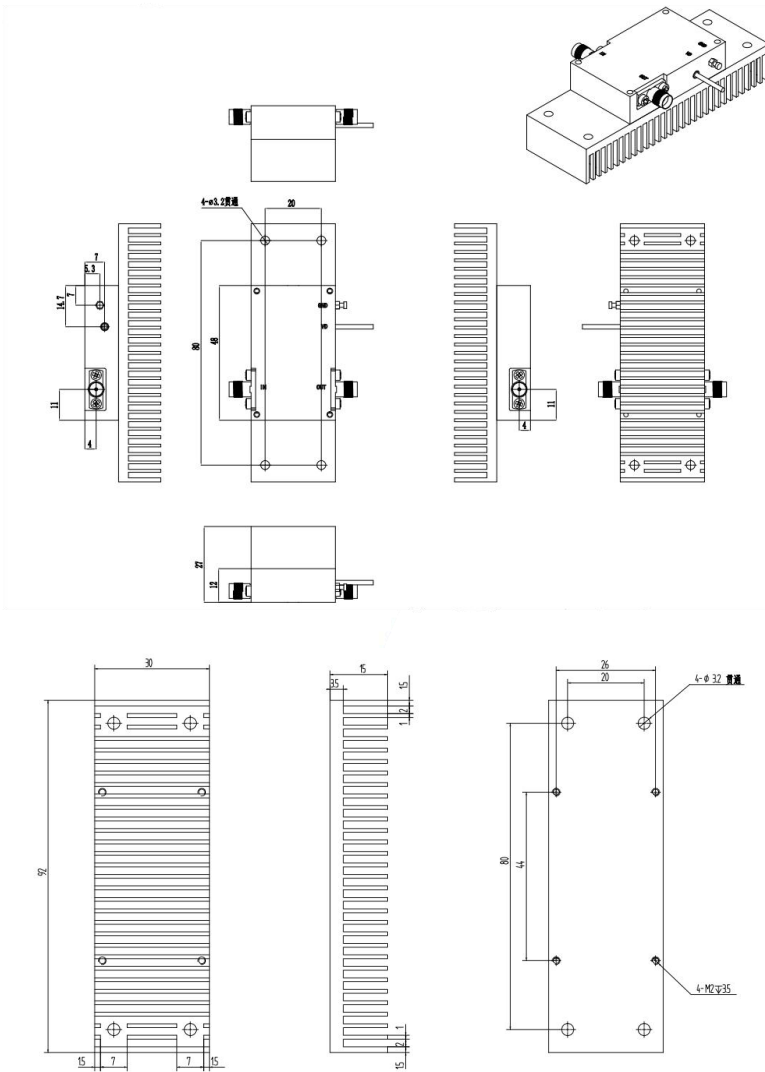



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic


温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURLA0.5G40G-2850	Low Noise Amplifier, 0.5-40GHz, Noise Figure:5.0dB, Gain: 28dB,P1dB:17dBm,+12V DC,Without Heatsink	Rev.1.1
TURLA0.5G40G-2850 HS	Low Noise Amplifier, 0.5-40GHz, Noise Figure:5.0dB, Gain: 28dB,P1dB:17dBm,+12V DC,With Heatsink	Rev.1.1


典型曲线 Typical Performance Data:

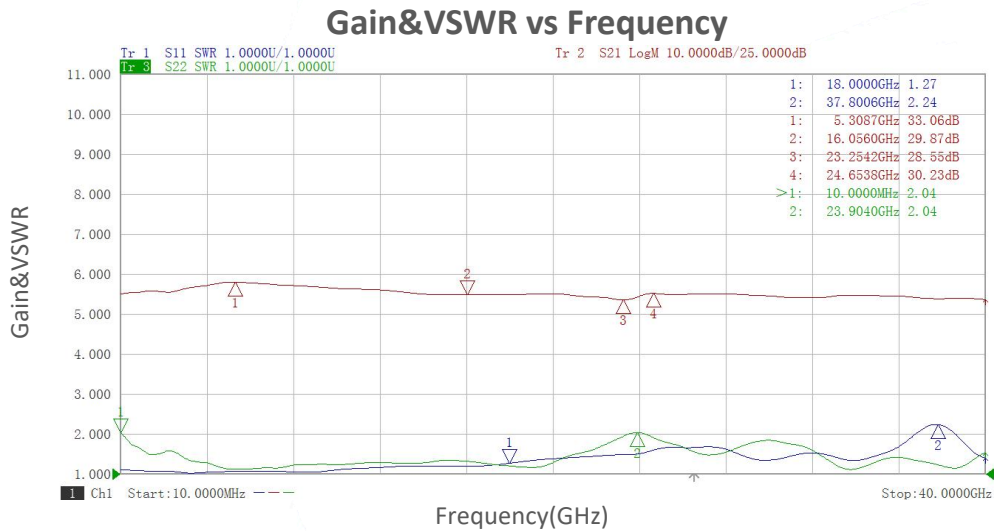

Note: Above data is for ref only, actual data may vary from unit to unit depending

典型曲线 Typical Performance Data:


Noise Figure vs Frequency

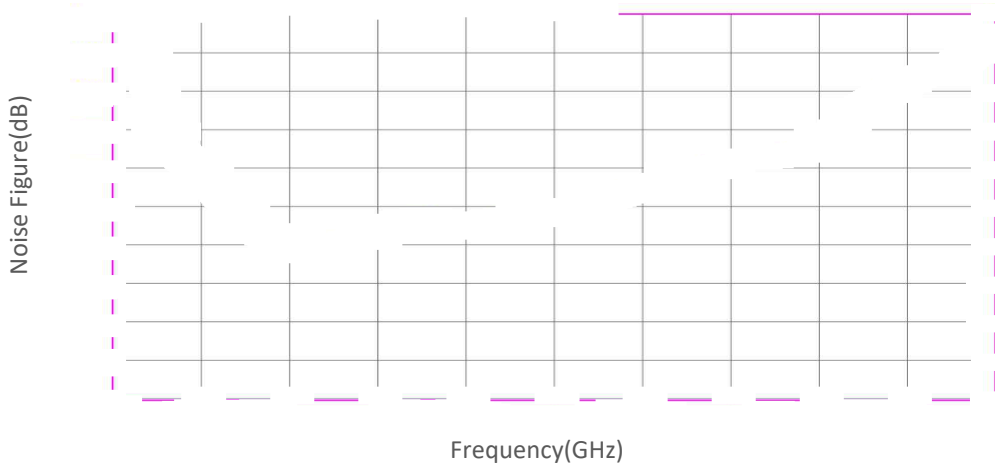

P1dB vs Frequency



Gain vs Output Power

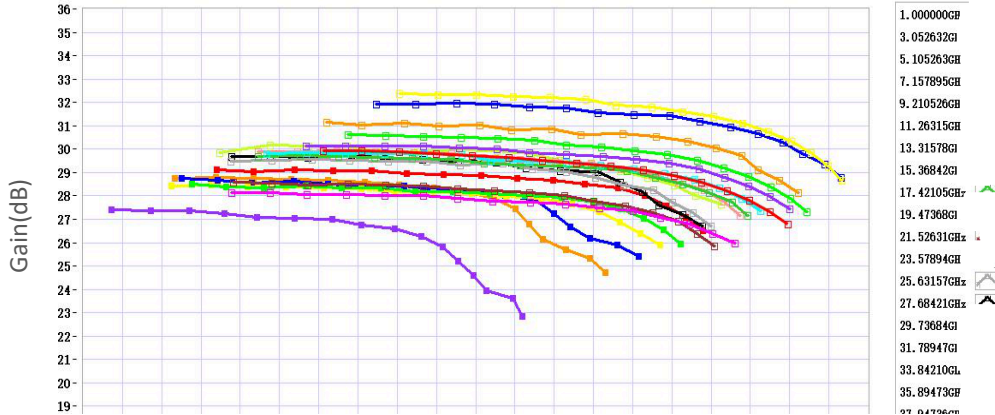

- 1. 000000GHz
- 3. 052632GHz
- 5. 105263GHz
- 7. 157895GHz
- 9. 210526GHz
- 11. 263158GHz
- 13. 315789GHz
- 15. 368421GHz
- 17. 421052GHz
- 19. 473684GHz
- 21. 526316GHz
- 23. 578947GHz
- 25. 631579GHz
- 27. 684211GHz
- 29. 736842GHz
- 31. 789474GHz
- 33. 842105GHz
- 35. 894737GHz
- 37. 947368GHz