

Model: TURLF-DC8GT2Cryo

Cryogenic Filters DC-8 GHz, SMA Male to Female

Feature:

- Low Insertion Loss
- Excellent Return Loss
- High Stop Band Suppression
- 50 Ohm Matched Input / Output

电气特性 Electrical:


参数Parameter	Min.	Typ.	Max.	单位Units
频率范围 Frequency range	DC-8			GHz
带内插损 Passband Insertion Loss		0.5		dB
带内回损 Passband Return loss		-20		dB
带外抑制 Stopband Suppression	@11 GHz	30		dB
	@15-32GHz	-40	-55	dB
射频功率 RF Power (W)			1	W
阻抗 Impedance	50			Ohms

机械特性 Mechanical :

参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	SMA Male/SMA Female	
外壳材质 Case Material	OFHC Copper	
表面 Finish	Gold Plated	mm
重量 Weight	30	g

外形尺寸 Outline Drawing:

Unit: mm

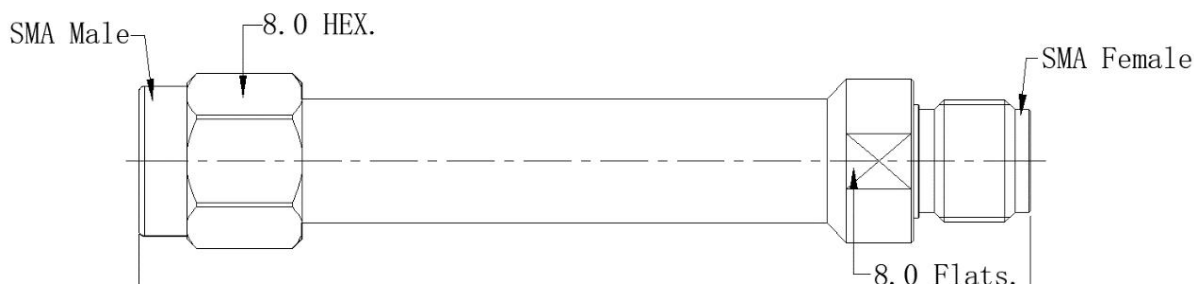

温度环境 Environmental Conditions:

参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	4K		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity	100% RH at 35c, 95%RH at 40°C			%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
TLLF-DC-8G-T2-Cryo	Cryogenic Filters DC-8 GHz	Rev.1.1

典型曲线 Typical Performance Date:

