

## Power Amplifier

0.1-22GHz /30dB Gain/27 dBm Psat

TLPA0.1G22G-30-27

TURPA0.1G22G-3027 is a power amplifier with a typical small signal gain of 33 dB and Psat of 27 dBm across the frequency range of 0.1 to 22 GHz. The DC power requirement for the amplifier is +24 VDC/0.85 A. The input and output port configuration offers coax adapter structure with SMA female.

### Features:

- Ultra Wide Band: 0.1-22GHz
- Small Signal Gain: 30dB Min
- Output Power Psat: 27dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

## 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	0.1-22			GHz
小信号增益 Small Signal Gain	30	33		dB
增益平坦度 Gain Flatness		±2		dB
线性输出功率 Output P1dB	26	29		dBm
饱和输出功率 Output Psat	27	30		dBm
输入驻波 Input VSWR		1.6	2	:1
输出驻波 Output VSWR		1.6	2	:1
直流电压 DC Voltage		24		V DC
直流电流 DC Supply Current		850		mA
阻抗 Impedance	50			Ohms

Note:Below 500MHz, some technical specifications will deteriorate.

## 机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
尺寸 Size	60*65*11(Without Heatsink) 60*90*41(With Heatsink)	mm
重量 Weight	200	g

## 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
输入功率 RF Input Power	0 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing: Unit:mm

外形图 Outline Drawing: Unit:mm

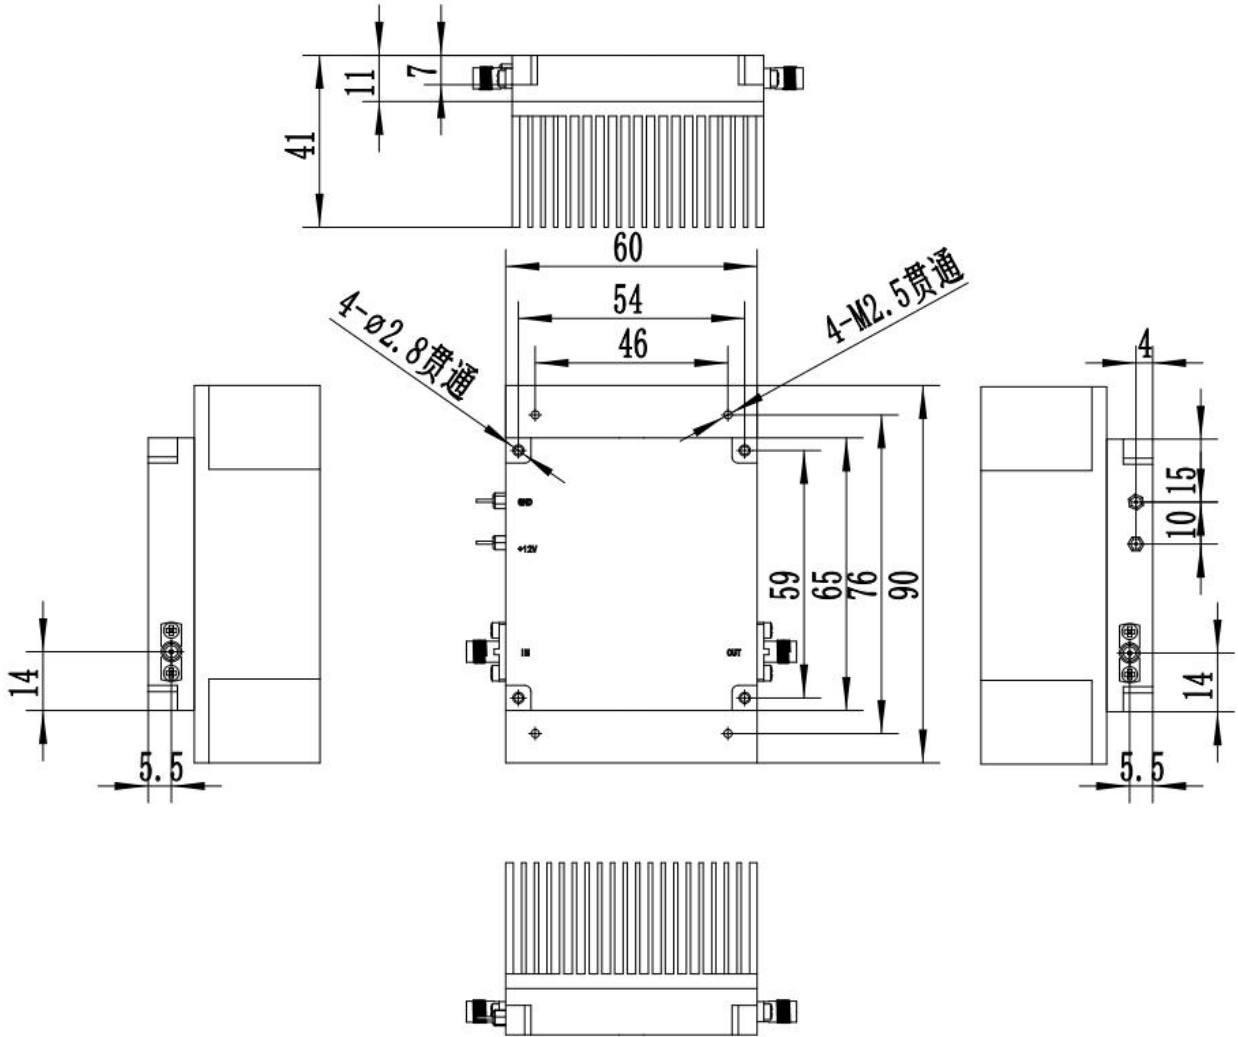

## 温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-40		+60	°C
存储温度 Non-operating Temperature*	-50		+70	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

\*Note: For a wider temperature range, please consult the manufacturer.

## 订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURPA0.1G22G-3027	Power amplifier 0.1-22GHz,Power Gain:30dB,Psat:27dBm, +24V DC,Without Heatsink	Rev.1.1
TURPA0.1G22G-3027 HS	Power amplifier 0.1-22GHz,Power Gain:30dB,Psat:27dBm, +24V DC,With Heatsink	Rev.1.1


## 典型曲线 Typical Performance Data:

### VSWR&Gain vs Frequency


VSWR&Gain

## 典型曲线 Typical Performance Data:

### Gain vs Output Power

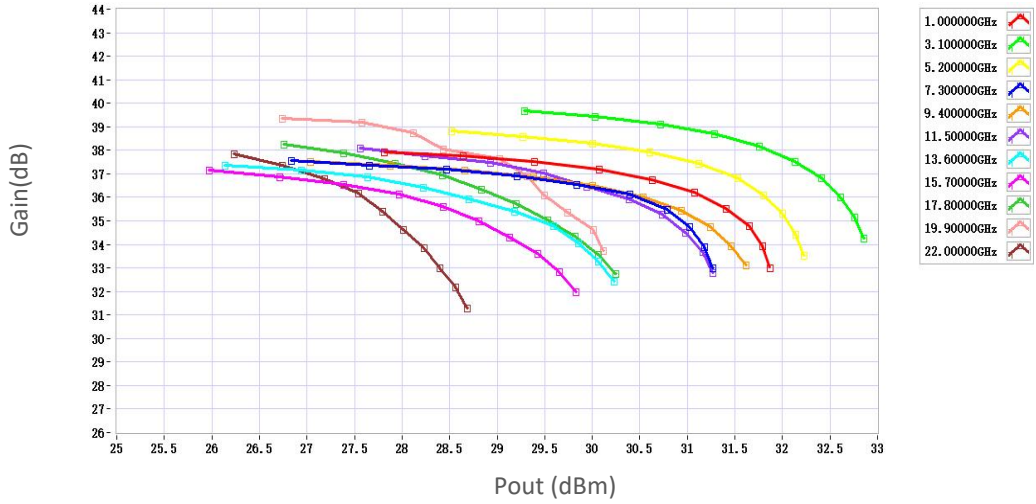


### P1dB vs Frequency

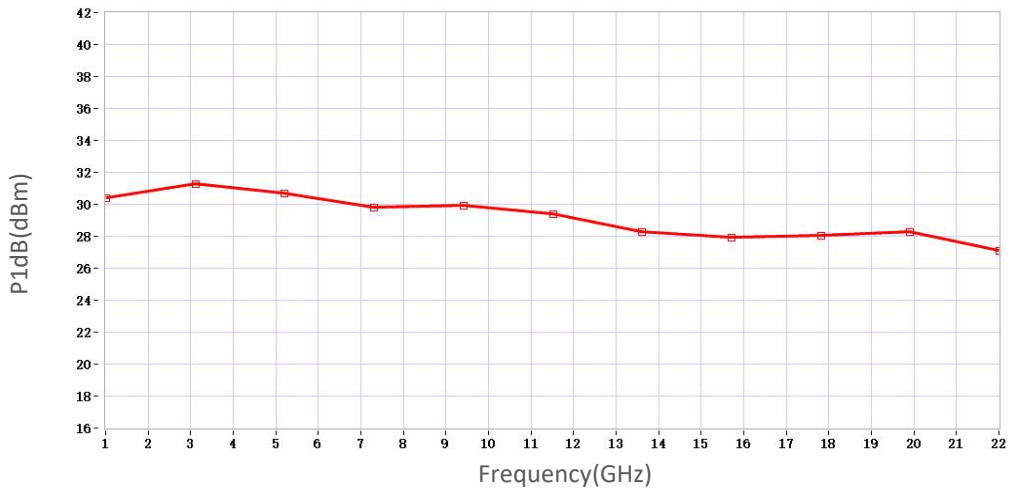

### P3dB vs Frequency

P3dB (dBm)

## 典型曲线 Typical Performance Data:

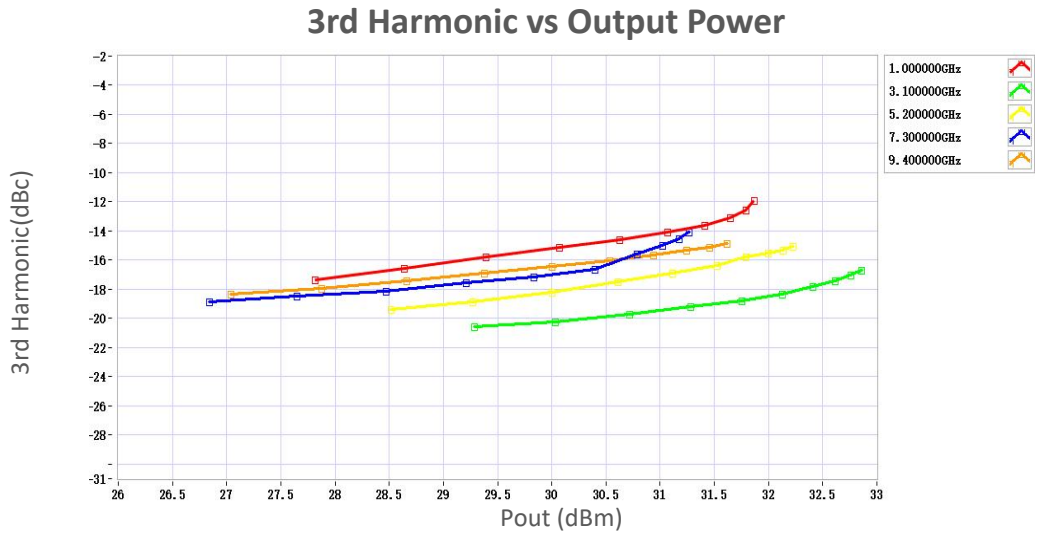

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.