

Power Amplifier

2-18GHz /50dB Gain/47 dBm Psat

TLPA2G18G-50-47

TURPA2G18G-5047 is a power amplifier with power gain of 50 dB and a nominal Psat of 47 dBm across the frequency range of 2 to 18 GHz. The DC power requirement for the amplifier is +28 VDC/600W. The input port configuration offers coax adapter structure with SMA female and output port configuration offers coax adapter structure with N female.

Features:

- Frequency range: 2-18 GHz
- Gain: 50 dB Min
- Output Power Psat: 47 dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	2-18			GHz
功率增益 Power Gain	50			dB
增益平坦度 Gain Flatness		±3	±5	dB
线性输出功率 Output P1dB		40		dBm
饱和输出功率 Output Psat	47			dBm
杂散 Spurious@Pout=47dBm			-60	dBc
谐波抑制 Harmonic@Pout=47dBm		-10	-15	dBc
输入驻波 Input VSWR			2	:1
直流电压 DC Voltage		28		V DC
功耗 Power Consumption			600	W
阻抗 Impedance	50			Ohms


机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/N Female	
直流偏置 DC Bias	SUB-7W2	A1:+28V A2:GND Pin1~5:NC
尺寸 Size	200*100*23(Without Heatsink) 200*100*69.5(With Heatsink)	mm
重量 Weight	≤4	Kg

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+28 V
输入功率 RF Input Power	+10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing: Unit:mm

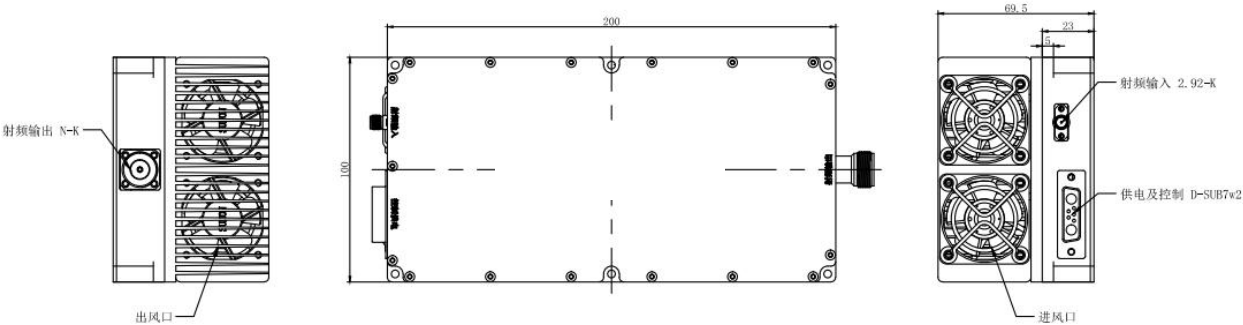

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.



温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-20		+50	℃
存储温度 Non-operating Temperature*	-30		+60	℃
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURPA2G18G-5047	Power amplifier 2-18GHz, Gain:50dB,Psat:47dBm,+28V DC,Without Heatsink	Rev.1.1
TURPA2G18G-5047 HS	Power amplifier 2-18GHz, Gain:50dB,Psat:47dBm,+28V DC,With Heatsink	Rev.1.1


典型曲线 Typical Performance Data:

Input VSWR vs Frequency


Input VSWR

典型曲线 Typical Performance Data:


Small Signal Gain vs Frequency

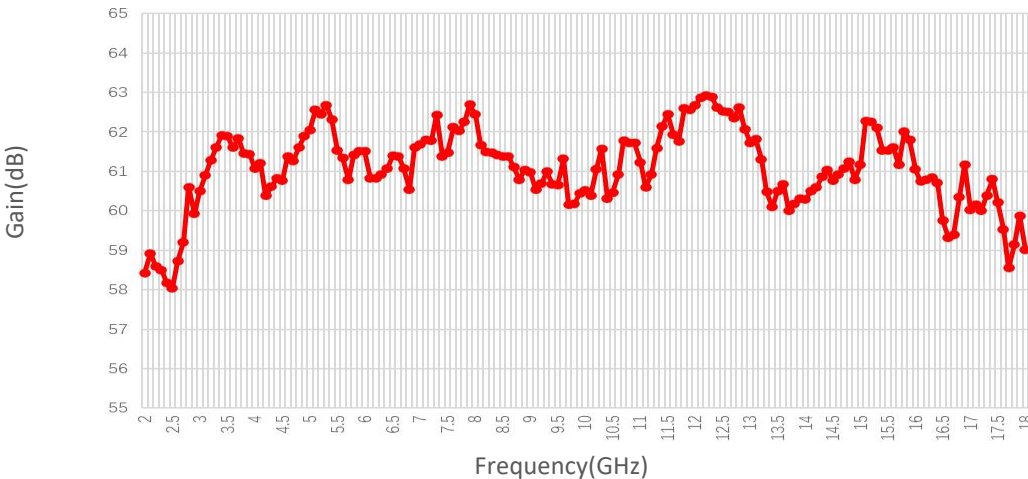

P1dB vs Frequency

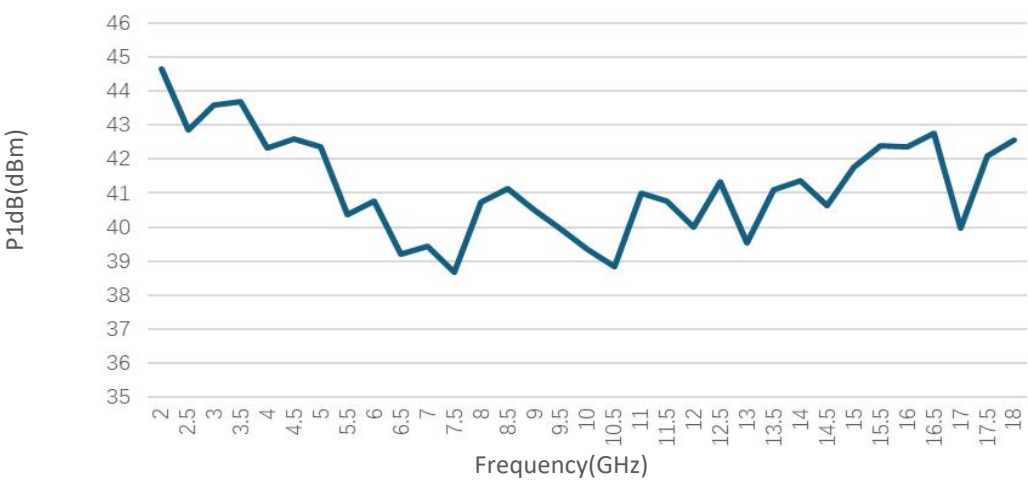

Pout@Pin

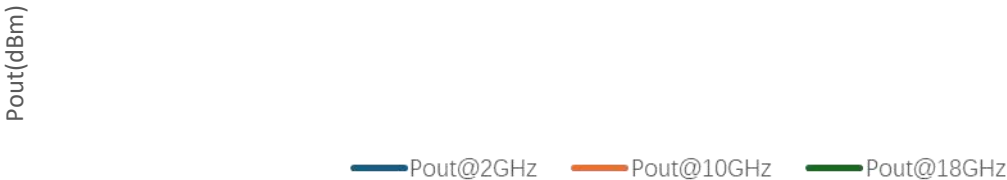

典型曲线 Typical Performance Data:

