

Part No.: TURRS4DC130-S

Power Splitter/Combiner 4 Way SMA 50Ω DC to 13GHz

电气特性 Electrical:


工作频率 Frequency Range: DC-13GHz
插入损耗 Insertion Loss: $\leq 12\text{dB} \pm 2\text{dB}$
驻波 VSWR: $\leq 1.50 : 1$
耐功率 Power Handling: 1 Watt
阻抗 Impedance: 50 OHMS

机械特性 Mechanical:

温度范围 Temperature Range: $-55^{\circ}\text{C} - +85^{\circ}\text{C}$
接口 Connectors: SMA-Female
相对湿度 Relative Humidity: 0 ~ 90%


外形尺寸 Outline Drawing:

Unit: mm

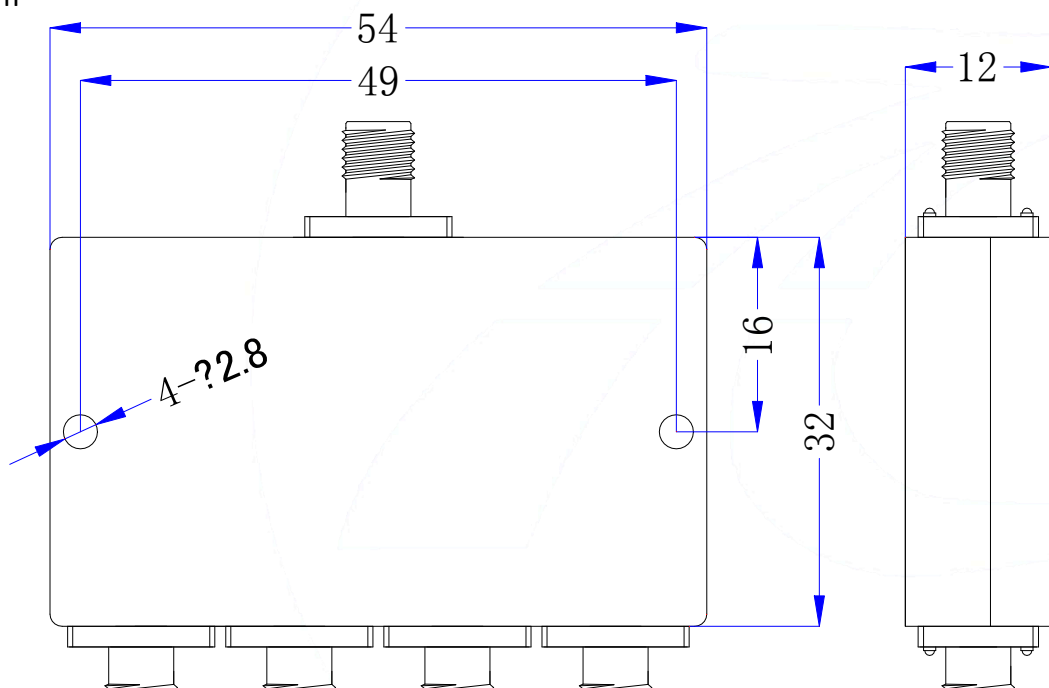


26 Nov 2018 04:56:51

CH1 SWR 100 m / REF 1
S11 2 : 1. 1636 13 . 000 000 000 GHz

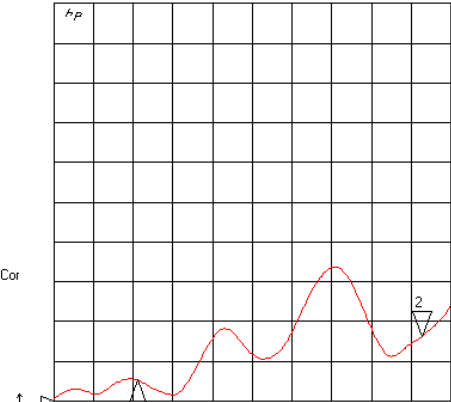


CH1 Markers
1 : 1. 0533
3. 00000 GHz

CH2 LOG 2 dB / REF -12 dB
S21 2 : -12 . 889 dB 13 . 000 000 000 GHz

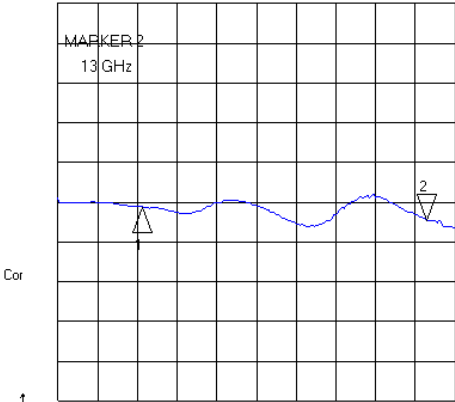


CH2 Markers
1 : -12 . 233 dB
3. 00000 GHz

CH3 LOG 1 dB / REF 0 dB
S12/M 2 : . 01100 dB 13 . 000 000 000 GHz

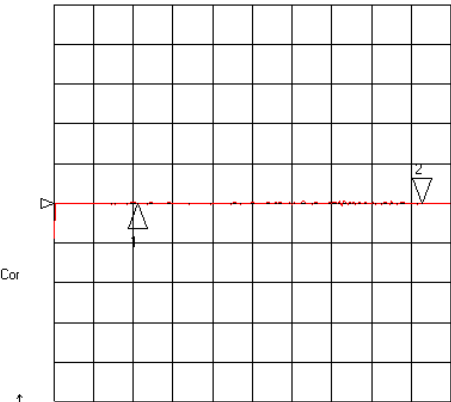

CH3 Markers
1 : . 01300 dB
3. 00000 GHz

CH4 SWR 100 m / REF 1
S22 2 : 1. 0731 13 . 000 000 000 GHz

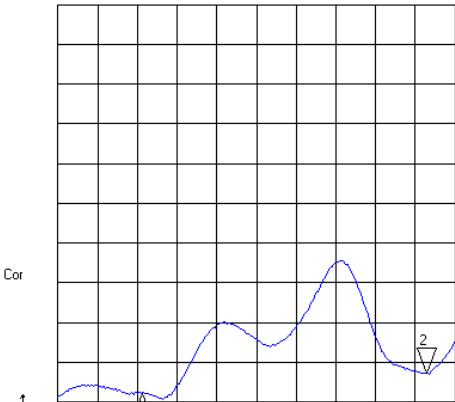

CH4 Markers
1 : 1. 0233
3. 00000 GHz