

Part No.: TURRS4DC180-S

Power Splitter/Combiner 4 Way SMA 50Ω DC to 18 GHz

电气特性 Electrical:

工作频率 Frequency Range: DC-18GHz

插入损耗 Insertion Loss: $\leq 14.5\text{dB}$

驻波 IN VSWR: ≤ 1.50

OUT VSWR: $\leq 2.2 : 1$

隔离 Isolation: $\geq 10\text{dB}, 10.5\text{dB typ}$

幅度平衡 Amplitude Balance: $\leq \pm 0.5\text{dB}$

相位平衡 Phase Balance: $\leq \pm 6^\circ$

耐功率 Power Handling: 2 Watt

阻抗 Impedance: 50 OHMS


机械特性 Mechanical:





温度范围 Temperature Range: $-55^\circ\text{C} - +85^\circ\text{C}$

接口 Connectors: SMA-Female

相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:

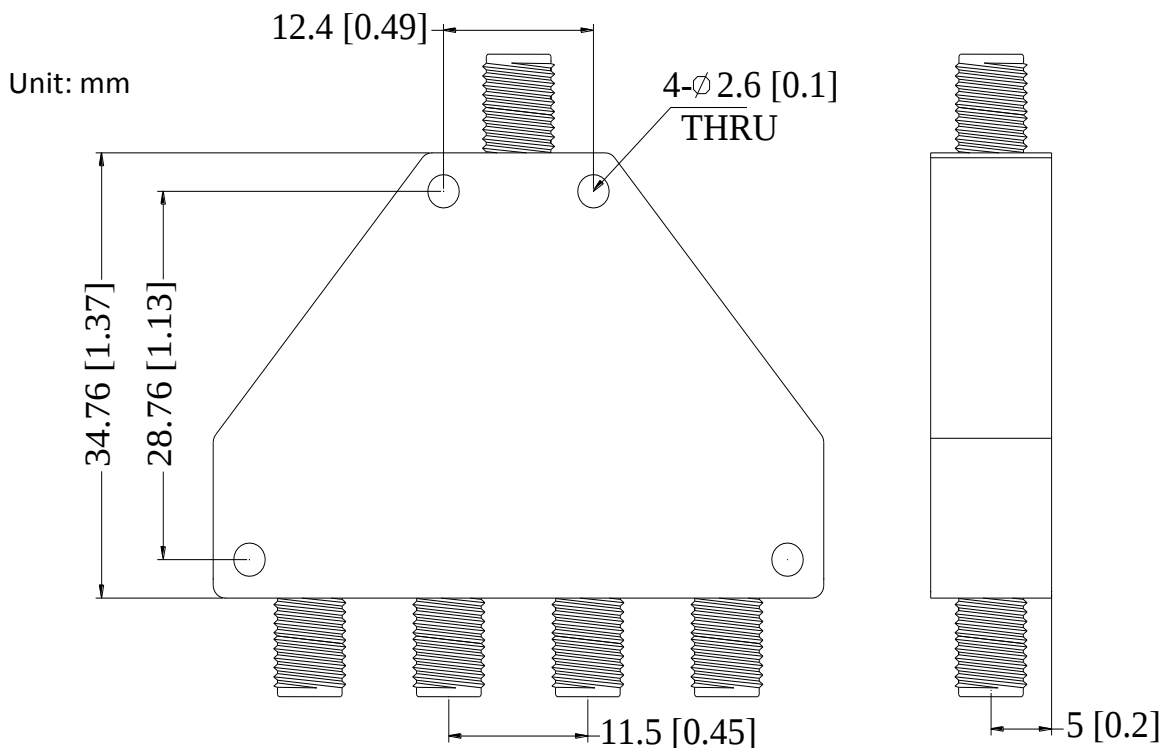

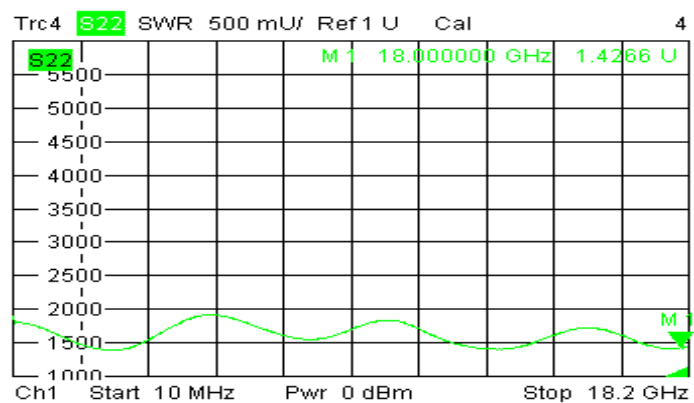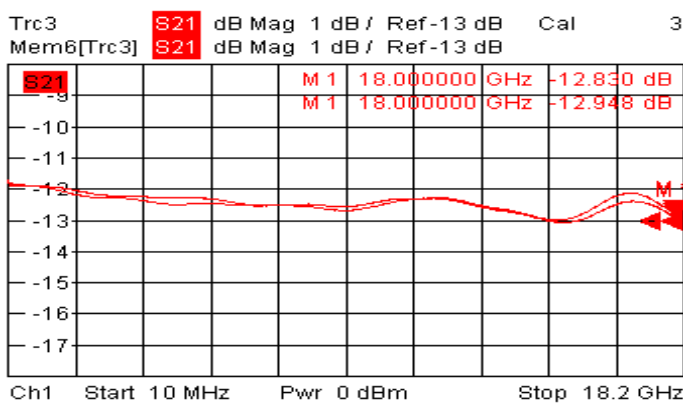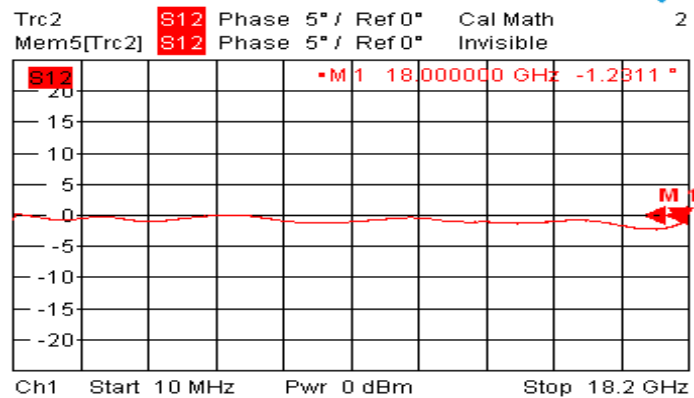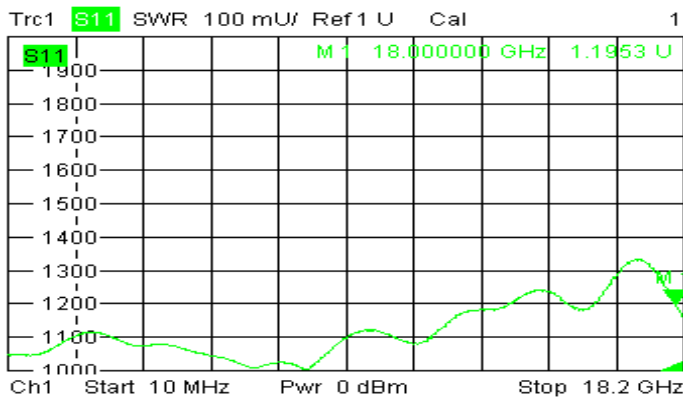

Trc2 **S12** dB Mag 2 dB / Ref -9 dB Cal Invisible

Mem5[Trc2] **S12** dB Mag 2 dB / Ref -9 dB Invisible

2 of 4 (Invis)

