

2W

The TURRT5-6NF is a well-matched, 50Ω male termination enabling operation from DC to 6 GHz. This termination features a 2W power rating and 1.25:1 @DC-6GHz max VSWR.

Features:

- Operating Frequency DC to 6 GHz
- High Return Loss
- Instrumentation Grade

Applications:

- laboratory test
- Communication equipment


电气特性 Electrical Characteristics:

| 参数 Parameter         | Min                     | Typ | Max  | 单位 Units |
|----------------------|-------------------------|-----|------|----------|
| 频率范围 Frequency Range | DC                      |     | 6    | GHz      |
| 驻波 VSWR              |                         |     | 1.25 | :1       |
| 耐功率 Power Handling   | ≤2Watts Average at 25°C |     |      | W        |
| 阻抗 Impedance         |                         | 50  |      | Ohms     |

环境和机械特性 Envrronmental And Physical Characteristics:

| 类型 Description            | 参数 Parameter                 | 单位 Units |
|---------------------------|------------------------------|----------|
| 操作温度 Operating Temerature | -55 To +100                  | °C       |
| 存储温度 Storage Temperature  | -55 To +100                  | °C       |
| 接口 Connectors             | N Female,Nickel plated Brass |          |

外形图 Outline Drawing:                      Unit:mm

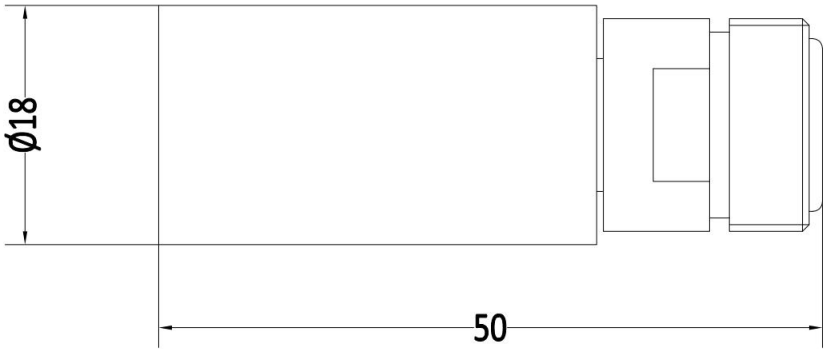

订货信息 Ordering Information:

| 标准型号 Base Number | 描述 Description                          |
|------------------|-----------------------------------------|
| TURRT5-6NF       | DC-6GHz,2W,N female Coaxial Termination |