

TURSE-140220053005 frequency extenders are a dedicated Test & Measurement solution for extending the range of your signal source to 140-220 GHz.

Features:

- Ultra Wide Band: 140-220 GHz
- Output Power : 5dBm Typ
- Low power consumption

Applications:

- Frequency Extension
- Antenna measurements
- Material characterisation

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	140		220	GHz
Output Power		5		dBm
Dynamic Range (Optional mechanical Attenuator)		30		dB
Input Frequency	11.5		18.75	GHz
Input Power	3	5	7	dBm
Multiplication Factor		12		
Harmonic Suppression		-20		dBc
Input VSWR		2		:1
Output VSWR		2		:1
DC Voltage		12		V
DC Supply Current		450		mA


Mechanical Specifications:

Parameter	Value	Units
Input Connector	SMA Female	
Output Connector	WR-05/UG-387/U	
DC Bias	Power adapter: 100-240VAC	
Size	170*75*68	mm


Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+240 V AC
RF Input Power	+10 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing: Unit:mm

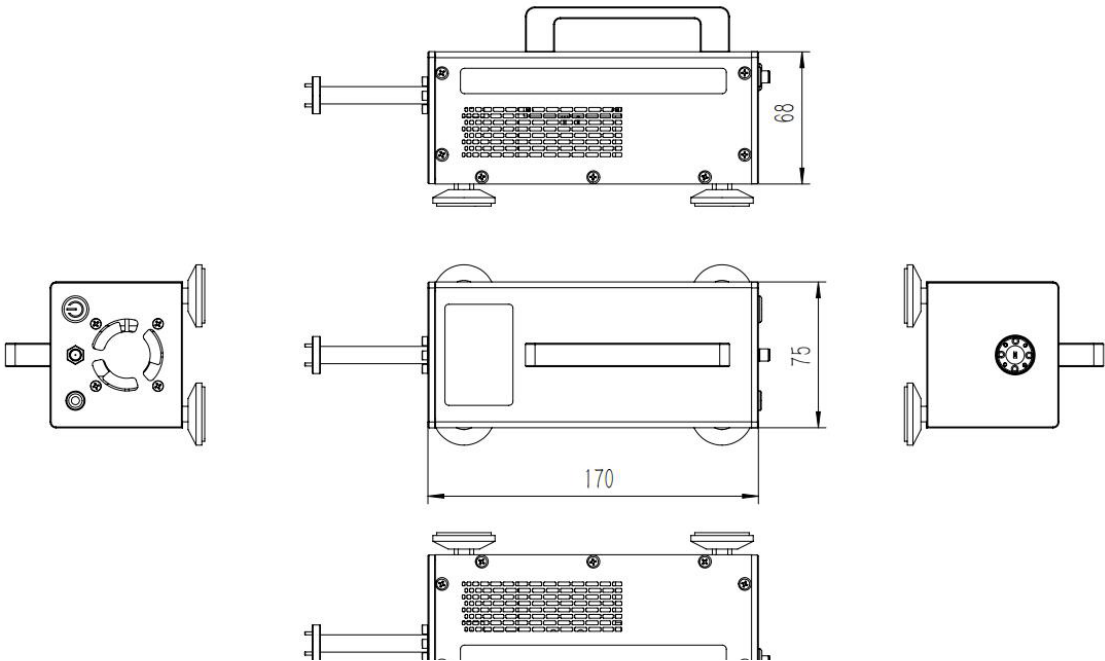

Block Diagrams:

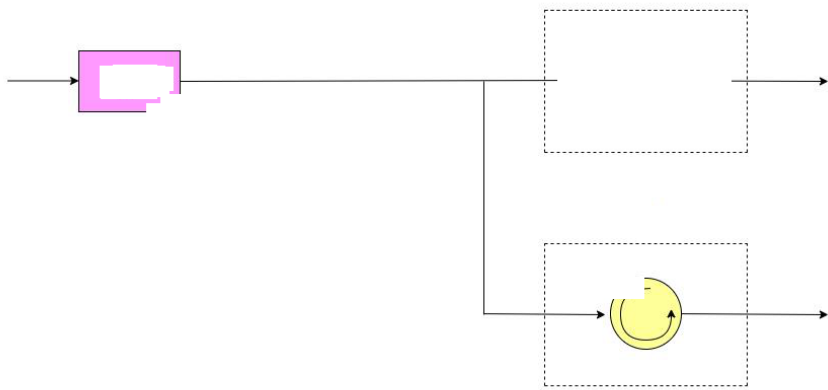

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Part Number	Desciption	Option		Revision
		Optional Mechanical Attenuator	Isolation	
TURSE-140220053005	E-Band Frequency Extender,X12,140-220GHz, Output Power: 5 dBm	-A	-I	Rev.1.2

Components Included:

Part Number	Description	Quantity
-------------	-------------	----------