


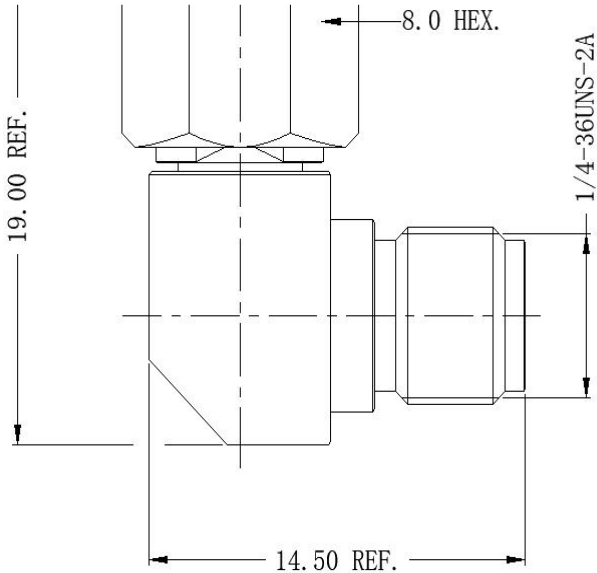

Electrical & Environmental Characteristics	
Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC~18GHz
Dielectric Withstanding Voltage	1000V
VSWR	≤1.25
Insertion Loss	≤0.30dB
Operating Temperature	10mK~+125℃
Material & Coat-Plating	
Inner Conductor	Non-magnetic beryllium copper, Gold Plated

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Turpanic Co, Ltd		,Inc
		CHK			
Unit	TOLERANCES UNLESS OTHERWISE SPECIFIED	APVD	Product Model		
mm			TURSMA-JWKNM		
	0 PLC ±0.25	PRODUCT	SMA Male-RA to S ptor with non-		
	1 PLC ±0.15	SPEC	magnetic		
	2 PLC ±0.12				
	3 PLC ±				
	3 PLC ±				
	ANGLES ±1°	APPLICATO			
		N SPEC			
			SIZE	GAGE CODE	DRAWING NO
			A4	0T8L4	A
MATEIAL	FINISH	WEIGHT			