

Model TURSP2T0.06G10GR

Reflective,Broadband PIN Switch
0.06-10GHz,SPDT,SMA

- Feature:
- Ultra Wide Band: 0.06-10 GHz
 - Low Insertion Loss: 2.0 dB
 - Power Handling : 30dBm
 - High Isolation
 - Switch Type: Reflective, Hot switching

电气特性 Electrical:

参数Parameter	Min.	Typ.	Max.	单位Units
频率范围 Frequency range	0.06-10			GHz
插损 Insertion Loss		2.0		dB
隔离 Isolation	60			dB
切换速度（热切换） Switch Speed(Hot switching)		100		ns
输入驻波 Input VSWR		1.5	2.0	:1
输出驻波 Output VSWR		1.5	2.0	:1
最大输入功率RF Input Power			30	dBm
直流电压 DC Voltage		+5/-5		V DC
直流电流 DC Supply Current		150/-50		mA
控制 Control Logic TTL	“0”=Low ; “1”=High			v
阻抗 Impedance	50			Ohms

机械特性 Mechanical :


参数Parameter	指标 Value	单位Units
输入输出接口Input /Output Connector	SMA Female	
直流控制接口Control Bias	PIN	
尺寸 Size	30*30*12	mm
重量 Weight	TBD	g

绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
-------------	----------

外形尺寸Outline Drawing:

Unit: mm(Inches)

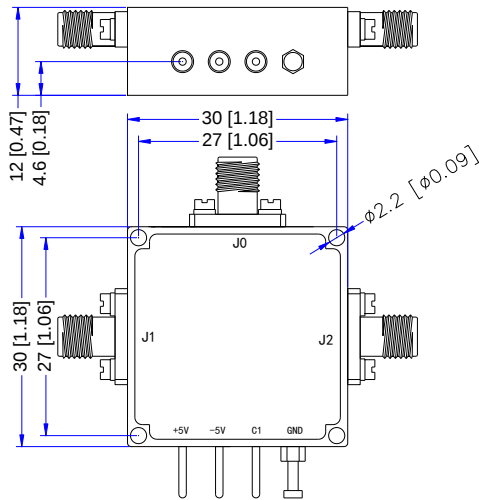

真值表 Truth Table	
TTL Control Input	Signal Path State
C1	
0	J0-J1
1	J0-J2



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:

参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	-10		+50	℃
存储温度 Non-operating Temperature	-55		+125	℃
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number

描述 Description

版本号Revision