

Part No.: TURTBG-101803S180

180 Degree 3dB Bridge

电气特性 Electrical:

工作频率 Frequency Range: 1-18GHz

耦合度Coupling : 3dB

插入损耗 Insertion Loss: 3.0db typ, 3.6db max

隔离度Isolation: 20db typ, 13db min

驻波 VSWR: 1.5 typ, 1.8 max

幅度平衡 Amplitude Balance: $\pm 0.9\text{dB}$ max

相位平衡Phase Balance: $\leq \pm 10$ degree

耐功率 Power Handling: 50 Watt

阻抗 Impedance: 50 OHMS

机械特性 Mechanical:


温度范围Temperature Range: -45° C - +85° C





接口Connectors: SMA-Female

相对湿度Relative Humidity: 0 ~ 90%

外形尺寸Outline Drawing:

Unit: mm

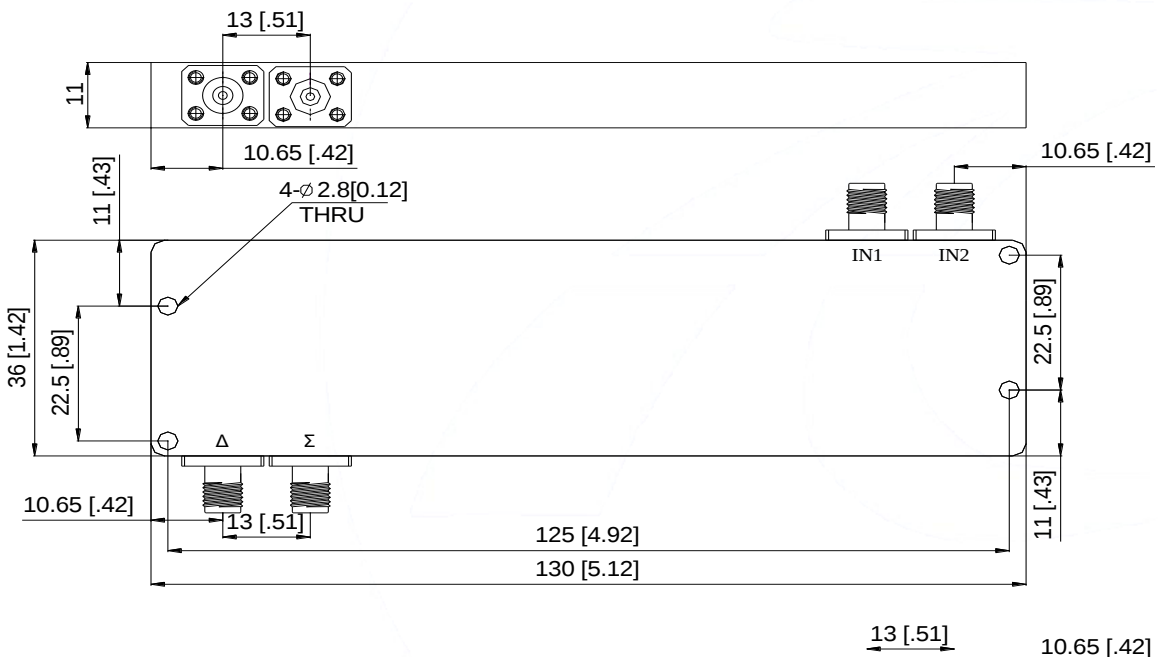

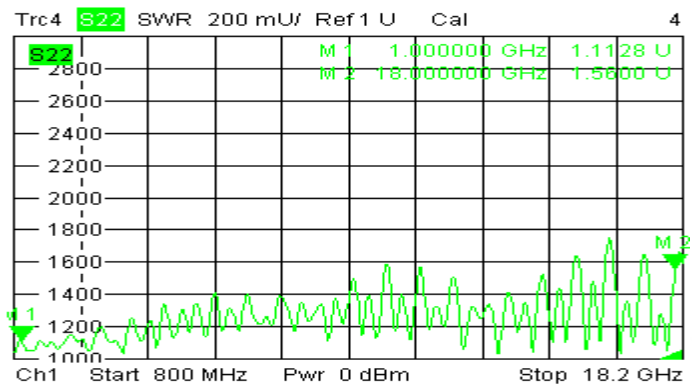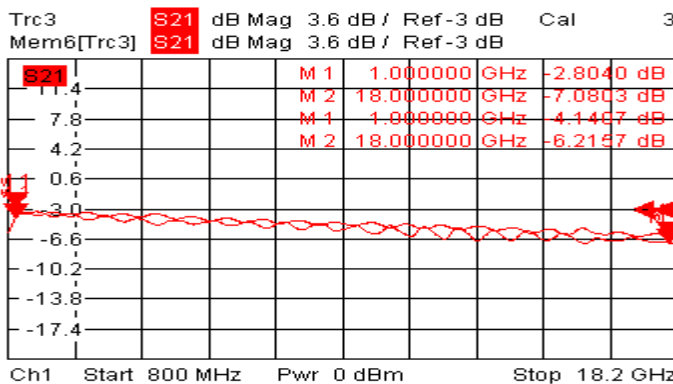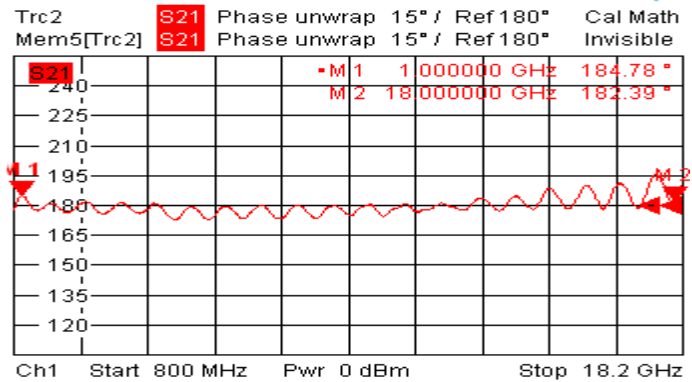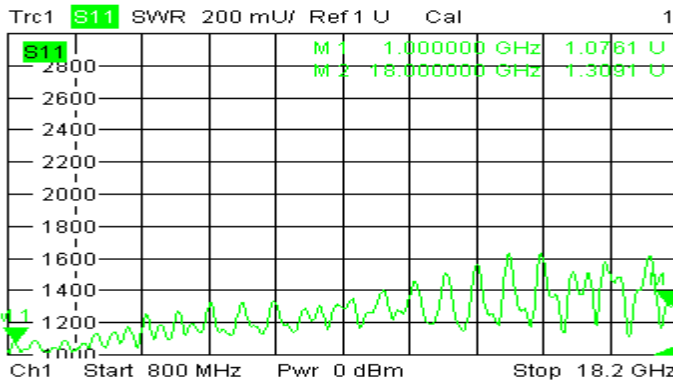


4/23/2020, 3:37 PM

Trc2 **S21** dB Mag 2 dB / Ref -18 dB Cal

Mem5[Trc2] **S21** dB Mag 2 dB / Ref -18 dB Invisible

2 of 4 (Memory)

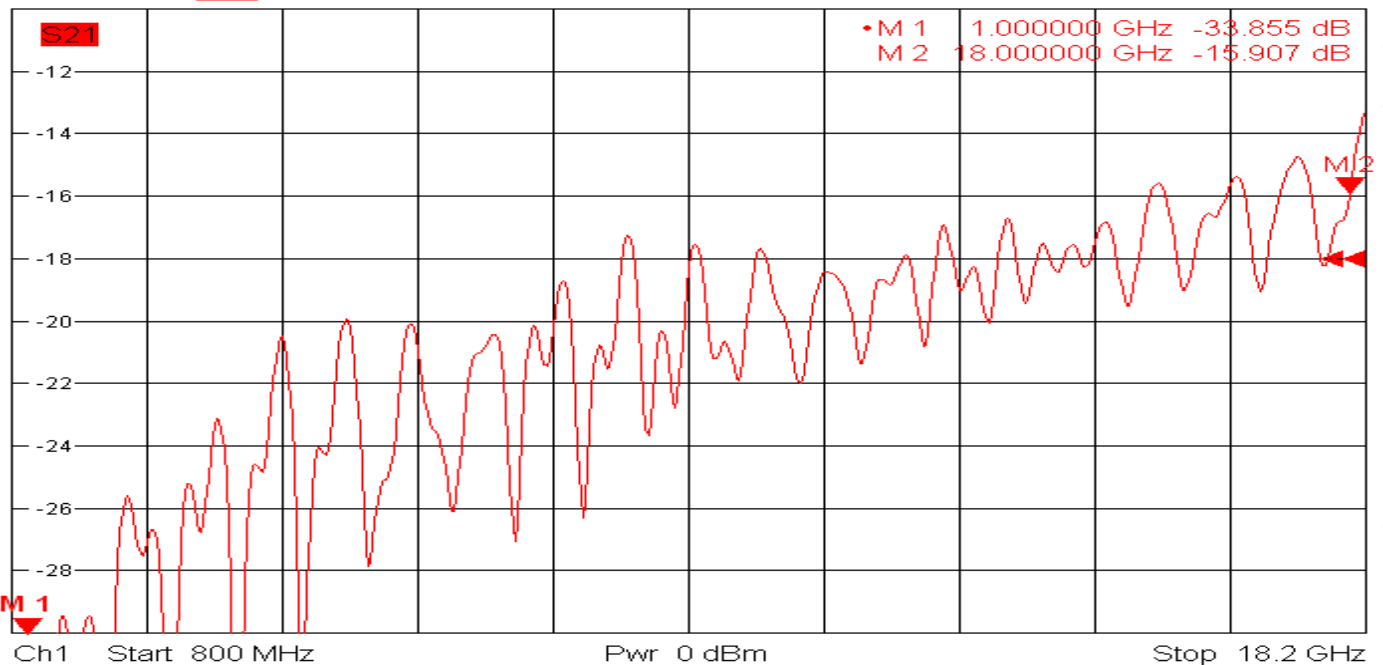

4/23/2020, 3:44 PM