

TURTBG-10203S90

90 Degree 3dB Bridge

电气特性 Electrical:

工作频率 Frequency Range: 1-2GHz

耦合度 Coupling: 3dB

插入损耗 Insertion Loss: 0.2db typ, 0.3db max

隔离度 Isolation: 25db typ, 22db min

驻波 VSWR: 1.15 typ, 1.2 max

幅度平衡 Amplitude Balance: ± 0.4 dB max

相位平衡 Phase Balance: $\leq \pm 2$ degree

耐功率 Power Handling: 50 Watt

阻抗 Impedance: 50 OHMS

机械特性 Mechanical:


温度范围 Temperature Range: $-45^{\circ}\text{C} - +85^{\circ}\text{C}$





接口 Connectors: SMA-Female

相对湿度 Relative Humidity: 0 ~ 90%


外形尺寸 Outline Drawing:

Unit: mm

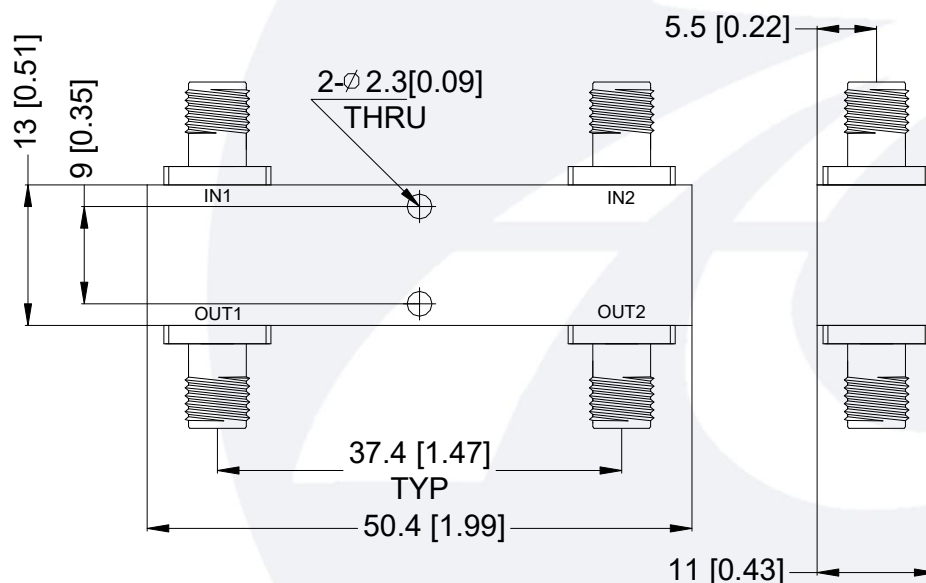

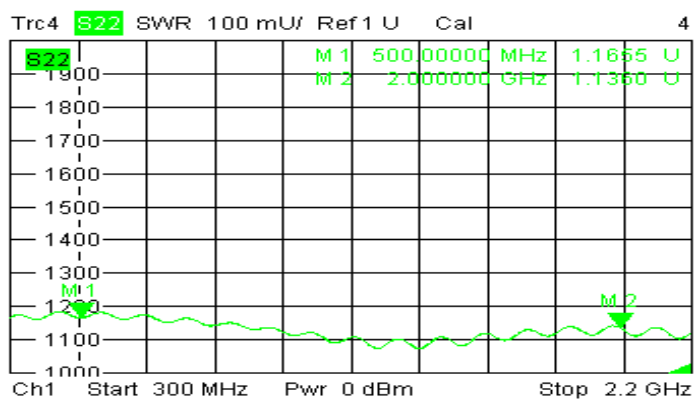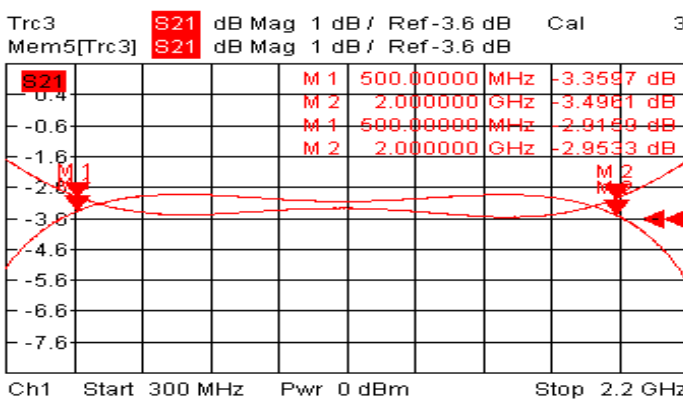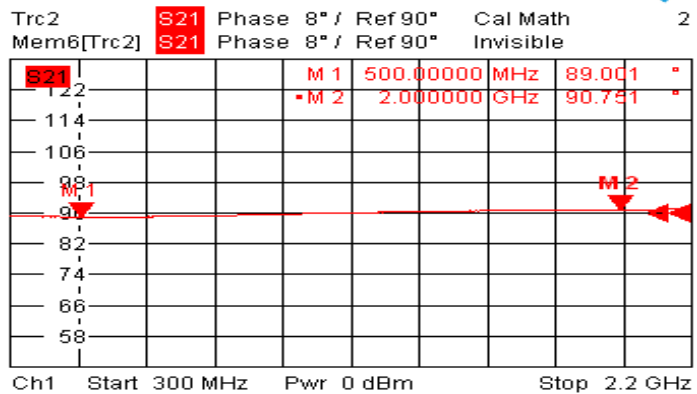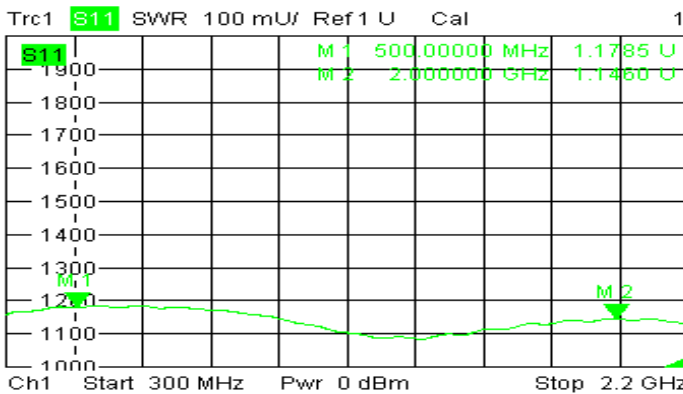

3/12/2020, 1:40 PM

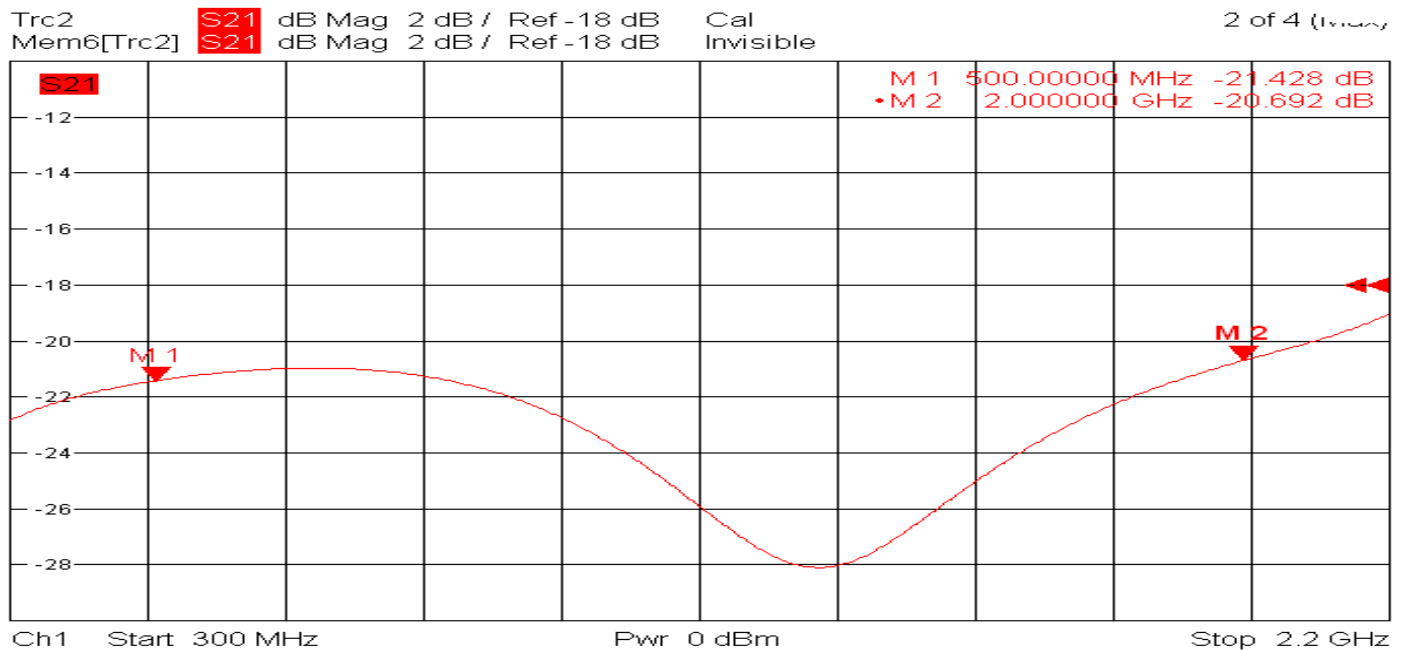

3/12/2020, 1:41 PM