

Part No.: TURTBG-502653S180

180 Degree 3dB Bridge

电气特性 Electrical:

工作频率 Frequency Range: 5-26.5GHz

耦合度Coupling: 3dB

插入损耗 Insertion Loss: 2.5db typ, 2.8db max

隔离度Isolation: 15db typ, 12db min

驻波 VSWR: 1.6 typ, 1.8 max

幅度平衡 Amplitude Balance: $\pm 0.9\text{dB}$ max

相位平衡Phase Balance: $\leq \pm 10$ degree

耐功率 Power Handling: 50 Watt

阻抗 Impedance: 50 OHMS

机械特性 Mechanical:


温度范围Temperature Range: -45°C - $+85^{\circ}\text{C}$






接口Connectors: SMA-Female

相对湿度Relative Humidity: 0 ~ 90%

外形尺寸Outline Drawing:

Unit: mm

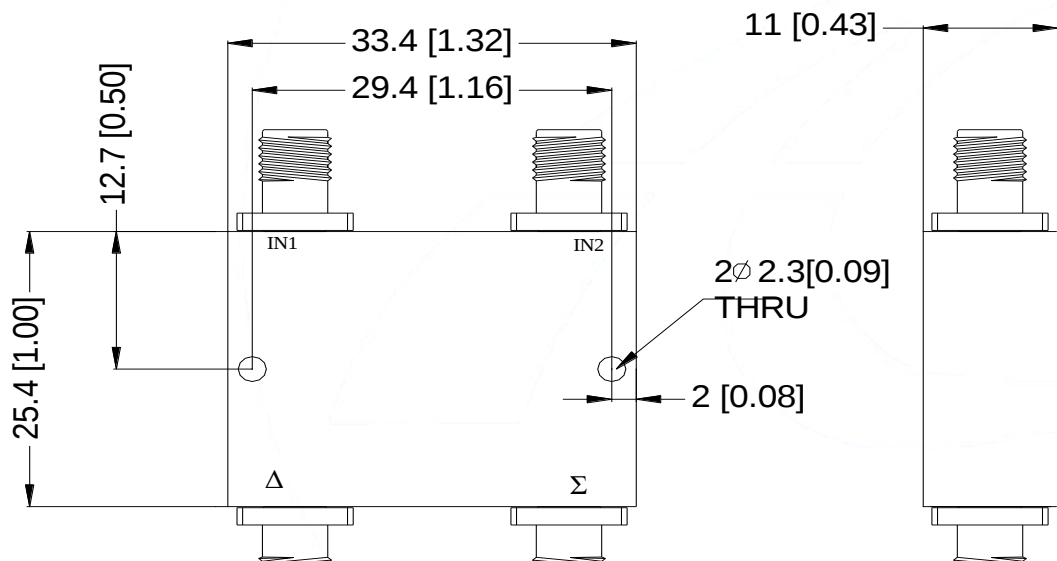


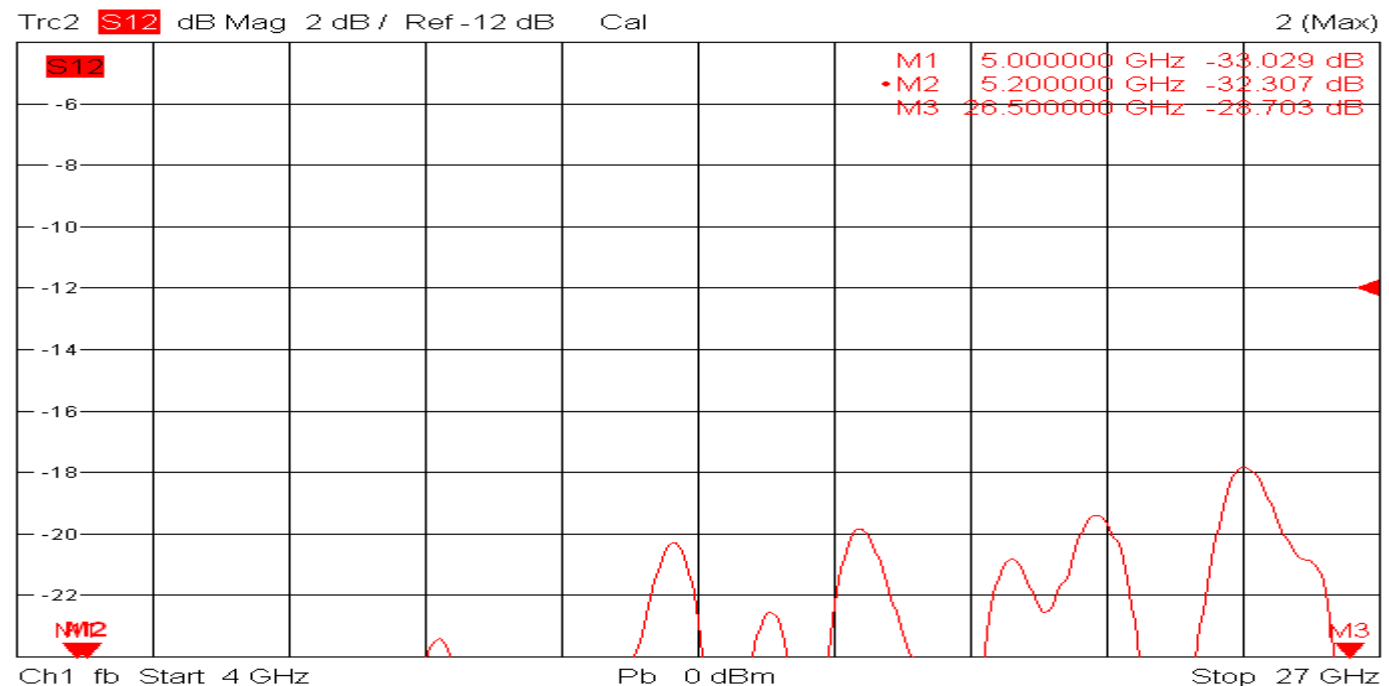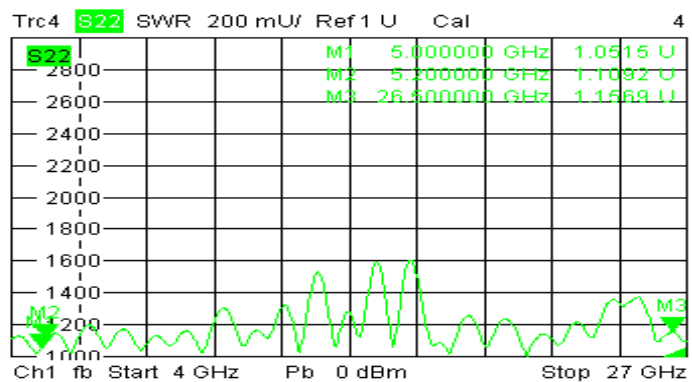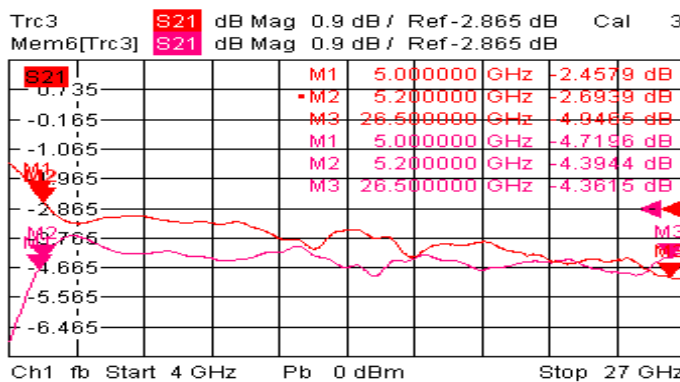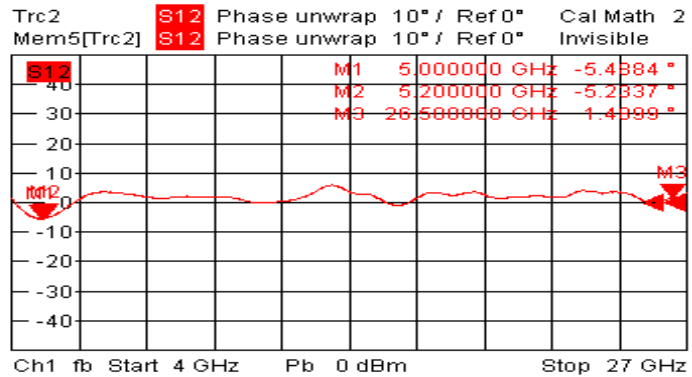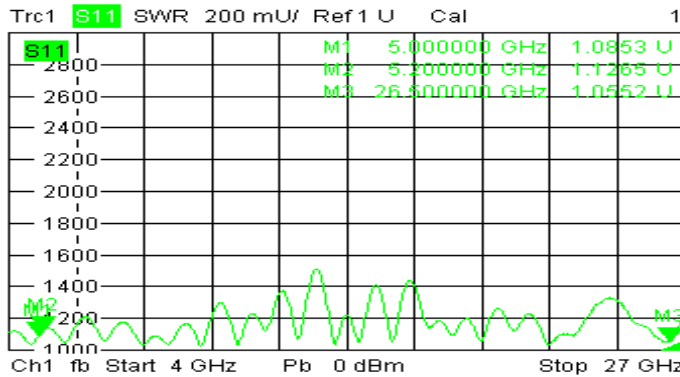



Trc3 S21 dB Mag 0.9 dB / Ref -3.045 dB Cal
 Mem6[Trc3] S21 dB Mag 0.9 dB / Ref -3.045 dB

3 (Max)

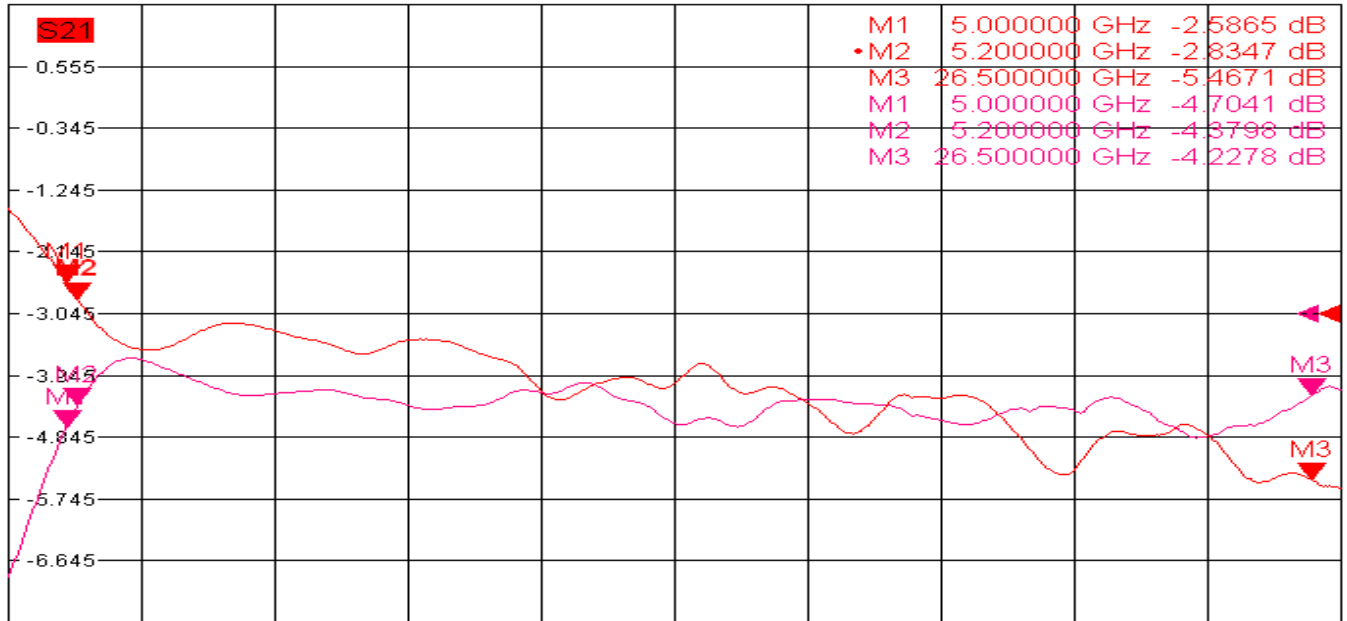

Ch1 fb Start 4 GHz

Pb 0 dBm

Stop 27 GHz