

Part No: TURTC-046010N

10dB Coupling

电气特性 ELECTRICAL:


工作频率 Frequency Range: 400-6000MHz
耦合 Coupling: 10dB $\pm$ 1.5dB
插入损耗 Insertion Loss: 1.5db max
方向性 Directivity: $\geq$ 12dB
驻波 VSWR: 1.5Max
耐功率 Power Handling: $\leq$ 30 Watt
阻抗 Impedance: 50 OHMS

机械特性 MECHANICAL :


温度范围Temperature Range: -40° C - +80° C
接口Connectors: N-Female
相对湿度Relative Humidity: 0 ~ 90%

外形尺寸Outline Drawing:

Unit: mm/IN

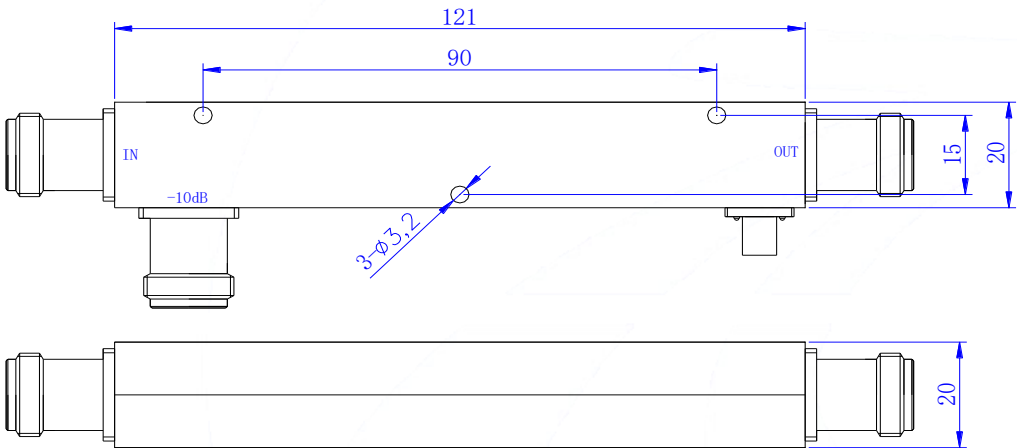


CH1 SWR 100 m / REF 1
S11 1 : 1. 0758 . 400 000 000 GHz

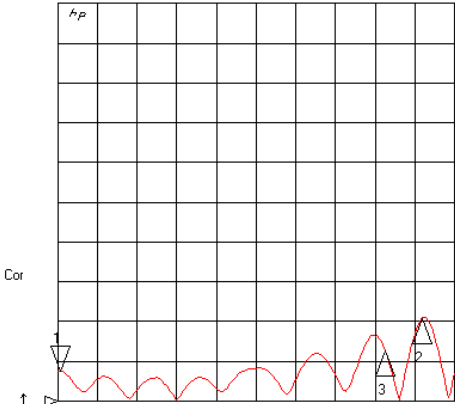


START 350 . 000 MHz STOP 6500 . 000 MHz

CH3 LOG 10 dB / REF -22 dB
MEM 1 : -37 . 229 dB . 400 000 000 GHz

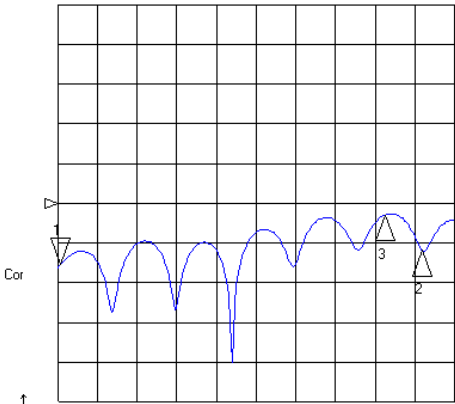


START 350 . 000 MHz STOP 6500 . 000 MHz
2002-1-1 01:25:55

20 Nov 2019 05:14:06
CH2 LOG 1.5 dB / REF -10 dB
S21 1 : -11 . 037 dB . 400 000 000 GHz

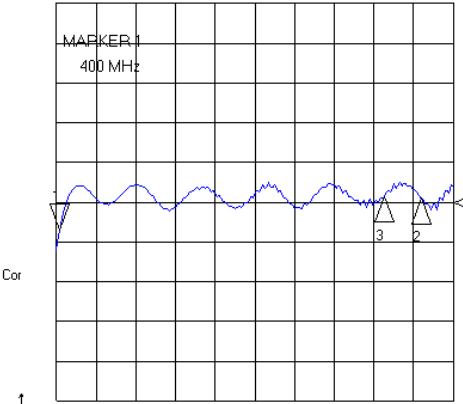

START 350 . 000 MHz STOP 6500 . 000 MHz

CH4 SWR 100 m / REF 1
S22 1 : 1. 0309 . 400 000 000 GHz

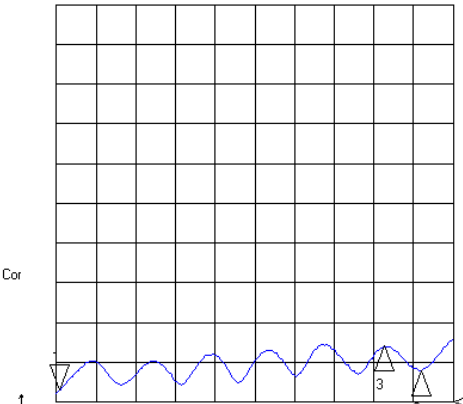

START 350 . 000 MHz STOP 6500 . 000 MHz