

Part No.: TURTC-0518020S

20dB Directional Coupler SMA- Female 50Ω 500-18000MHz

电气特性 Electrical:

工作频率 Frequency Range: 0.5-18.0GHz

耦合度 Coupling: $20 \pm 1.5\text{dB}$

插入损耗 Insertion Loss: $\leq 2.0\text{dB}$

驻波 VSWR: $\leq 1.7:1$

方向性 Directivity: $\geq 10\text{dB}$

耐功率 Power Handling: 30Watt

阻抗 Impedance: 50Ω



机械特性 Mechanical:


温度范围 Temperature Range: $-40^{\circ}\text{C} - +80^{\circ}\text{C}$





接口 Connectors: SMA-Female

相对湿度 Relative Humidity: $0 \sim 90\%$

外形尺寸 Outline Drawing:


Unit: mm

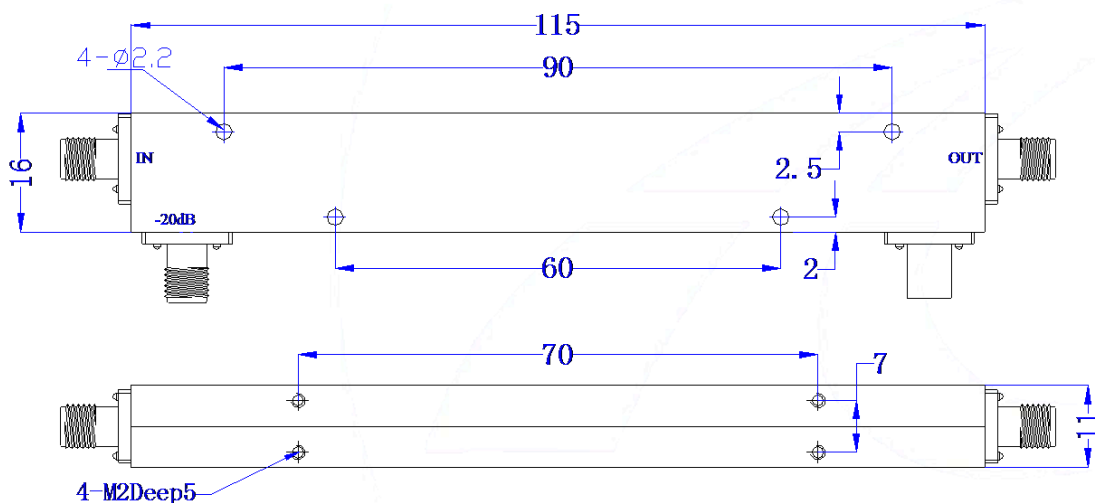

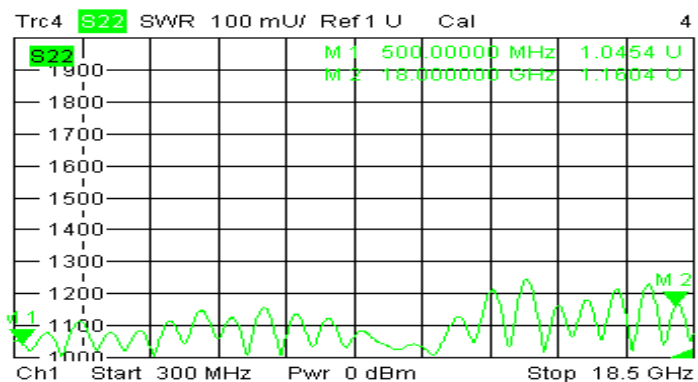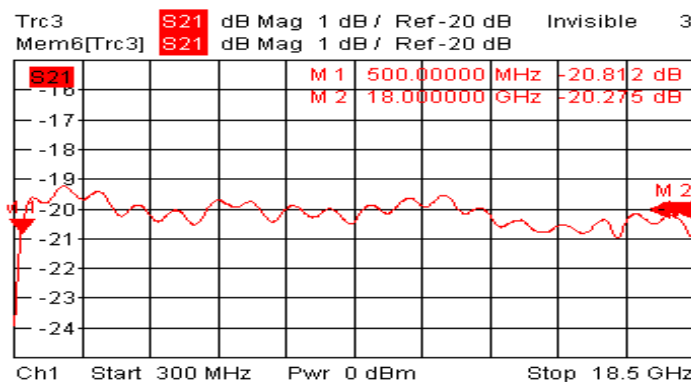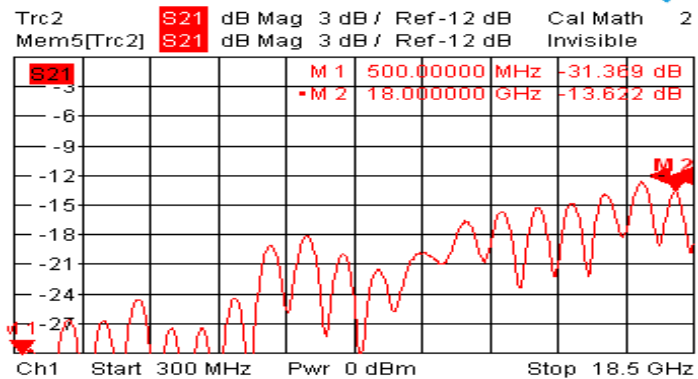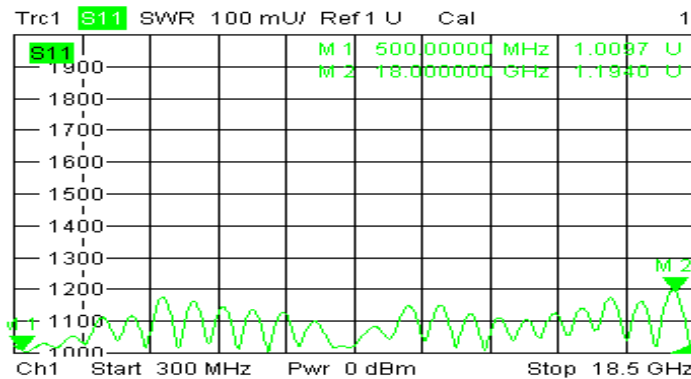

2/25/2020, 6:10 PM

Trc3 **S21** dB Mag 1 dB / Ref 0 dB Cal 3 of 4 (Invisi...
Mem6[Trc3] **S21** dB Mag 1 dB / Ref 0 dB Invisible

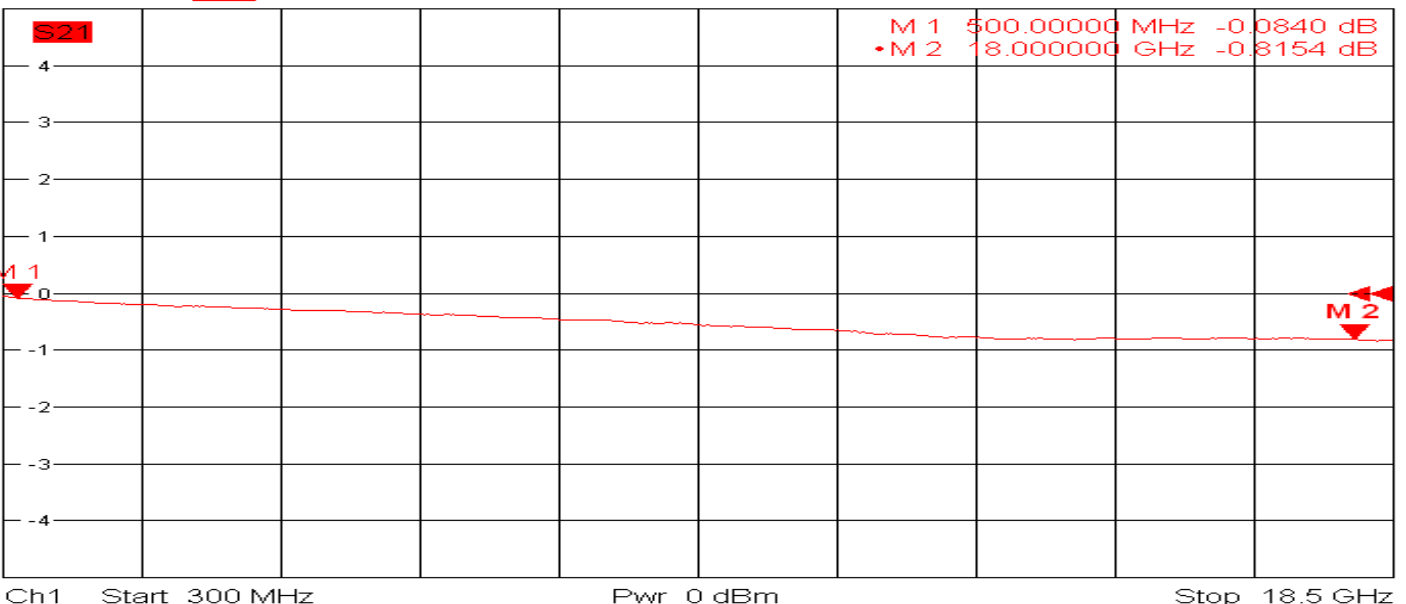

2/25/2020, 6:19 PM