

Part No.: TURTC-0518030S50W
30dB

30dB Directional Coupler SMA- Female 50Ω 500-18000MHz

电气特性 Electrical:

工作频率 Frequency Range: 500-18000MHz

耦合度 Coupling: $30 \pm 1\text{dB}$

插入损耗 Insertion Loss: $\leq 1.8\text{dB}$

驻波 VSWR: $\leq 1.7:1$

方向性 Directivity: $\geq 10\text{dB}$

耐功率 Power Handling: 30Watt

阻抗 Impedance: 50Ω



机械特性 Mechanical:


温度范围 Temperature Range: $-40^{\circ}\text{C} - +80^{\circ}\text{C}$





接口 Connectors: SMA-Female

相对湿度 Relative Humidity: $0 \sim 90\%$

外形尺寸 Outline Drawing:

Unit: mm

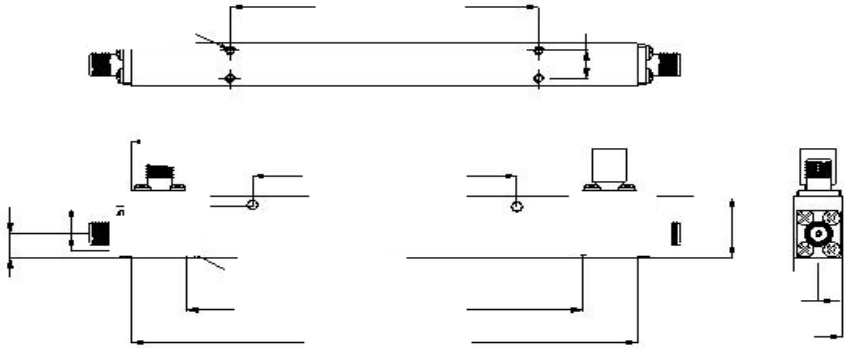


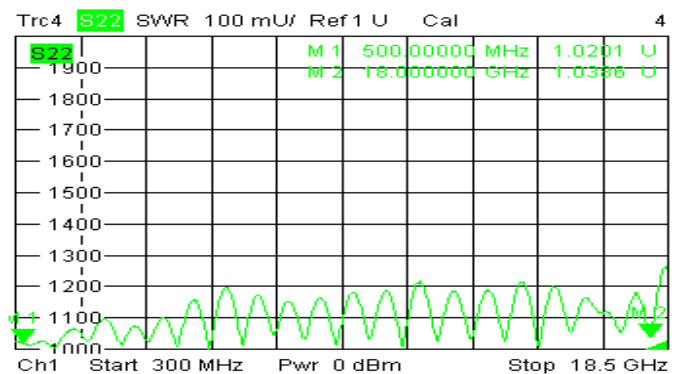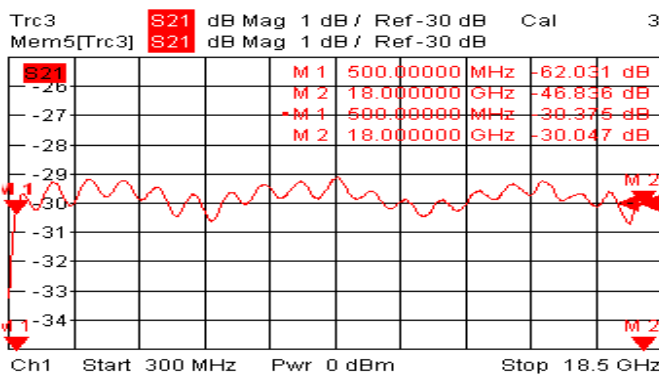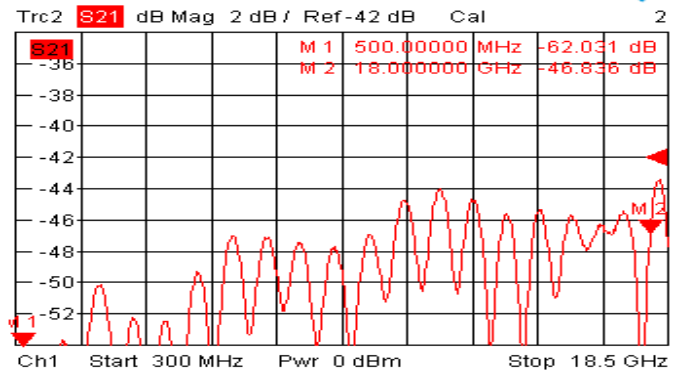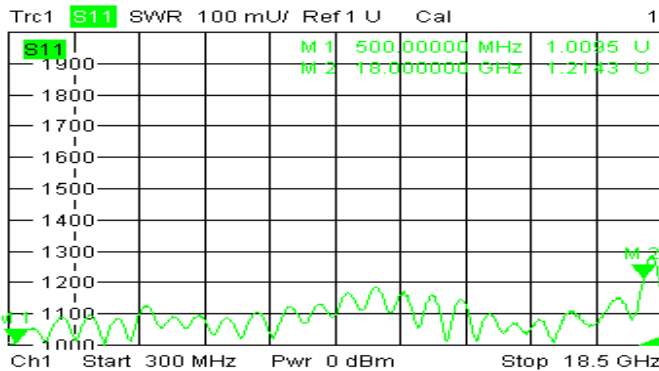

11/29/2018, 2:49 PM

Trc3 **S21** dB Mag 1 dB / Ref 0 dB Cal

3 of 4 (Memory)

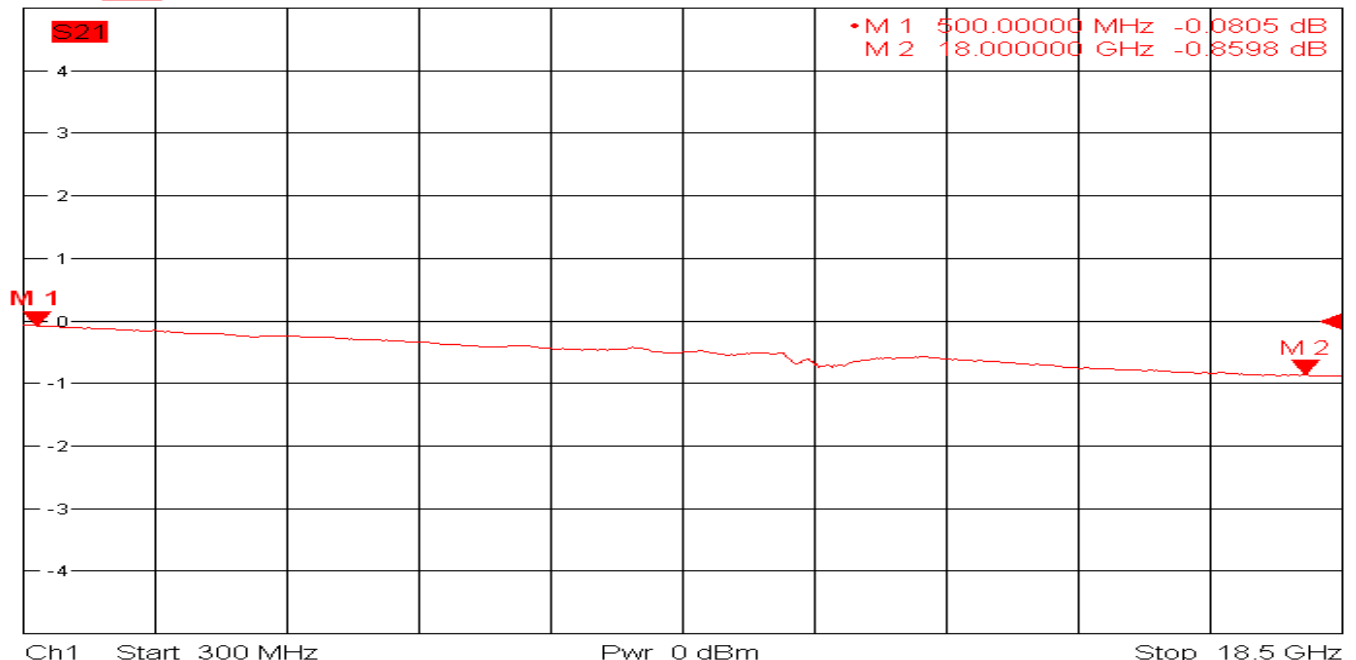

11/29/2018, 3:02 PM