

Part No.: TURTC-0526510S

10dB Directional Coupler SMA -Female 50Ω 0.5-26.5 GHz

电气特性 Electrical:


工作频率 Frequency Range: 0.5-26.5 GHz
耦合度 Coupling:: 10 ± 1.6 db
插入损耗 Insertion Loss: 1.8db typ, 2.8db max
方向性 Directivity: : 12db typ, 10db min
驻波 VSWR: 1.7 max
耐功率 Power Handling: 30 Watt
阻抗 Impedance: 50 OHMS





机械特性 Mechanical:

温度范围 Temperature Range: $-45^{\circ}\text{C} - +85^{\circ}\text{C}$
接口 Connectors: SMA-Female
相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

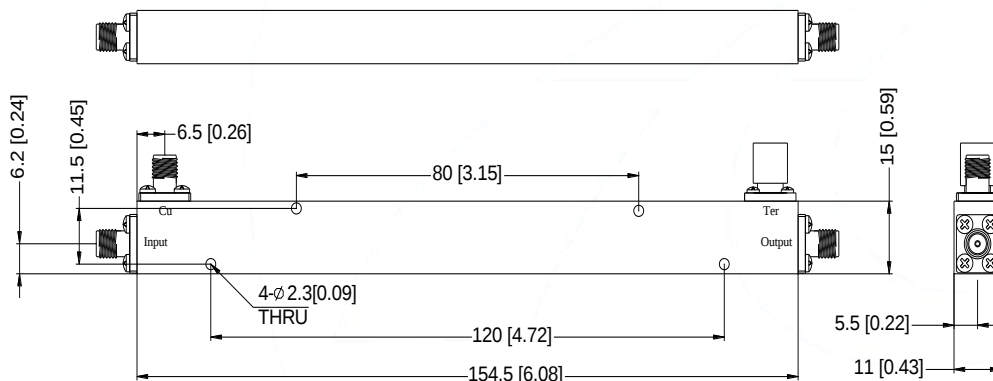

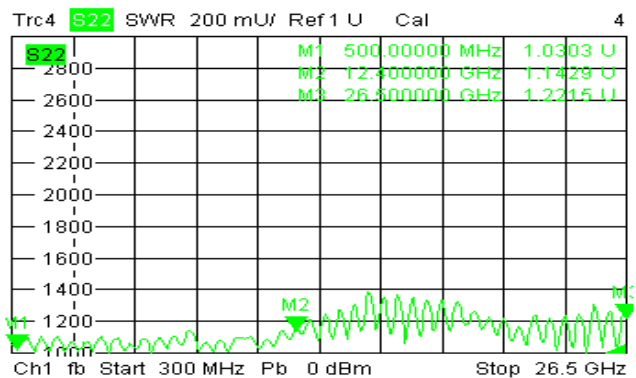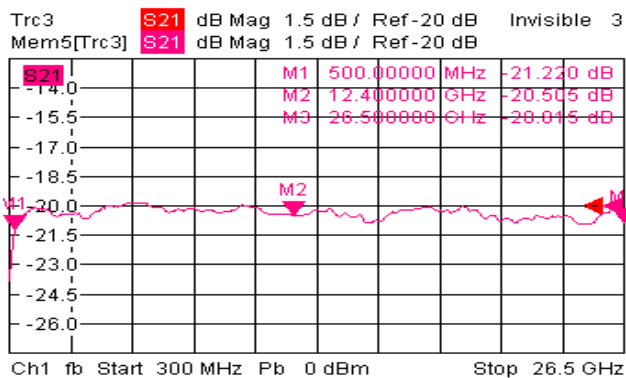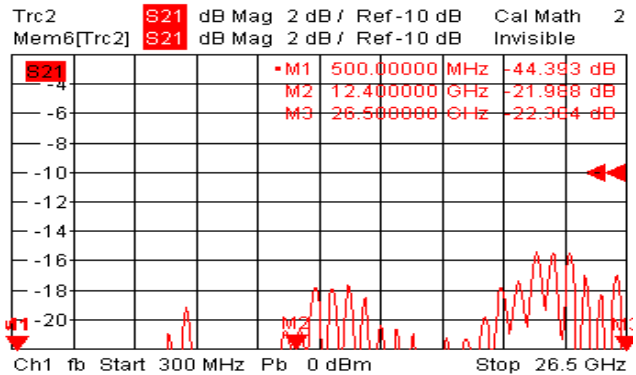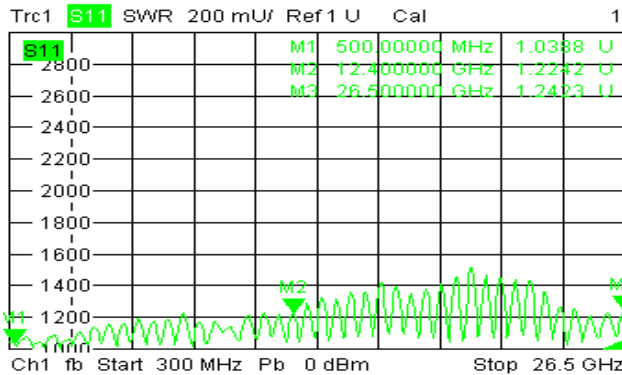

11/12/2018, 8:19 PM

