

Part No.: TURTDC-00110040S200SMD

40dB Directional Coupler 0.1-1GHz

电气特性 Electrical:

工作频率 Frequency Range:	100-1000MHz
耦合度Coupling :	40±1.0dB
插入损耗 Insertion Loss:	0.12dB Max
驻波 VSWR:	1.10:1 Max
方向性 Directivity:	25.0dB Min
耐功率 Power Handling:	200 Watt
阻抗 Impedance:	50 OHMS

机械特性 Mechanical:

温度范围Temperature Range:	-55° C - +105° C
大小Size:	20mm*17mm
厚度Thickness:	1.8mm
相对湿度Relative Humidity:	0 ~ 90%

外形尺寸Outline Drawing:

Unit: mm

端口配置表 Port Configuration Table:

Hybrid Coupler Pin Configuration


PIN1	PIN2	PIN3	PIN4
Input	Reflected Coupled	Transmission	Forward Coupled
Transmission	Forward Coupled	Input	Reflected Coupled

Typical Performance Data


Frequency		MH z	100	220	340	460	550	640	760	880	1000
Coupling		dB	-40.87	-39.47	-39.77	-40.15	-40.25	-40.23	-40.12	-39.87	-39.54
Insertion Loss		dB	-0.009	-0.023	-0.033	-0.050	-0.051	-0.064	-0.081	-0.090	-0.101
Directivity		dB	-44.55	-45.75	-40.35	-36.56	-34.48	-33.23	-30.30	-27.10	-26.32
VSWR	Input	/	1.04	1.04	1.04	1.05	1.05	1.06	1.07	1.08	1.09
	Transmission	/	1.04	1.05	1.06	1.07	1.07	1.08	1.08	1.08	1.09

典型曲线 Typical Performance Data:


Input VSWR vs Frequency

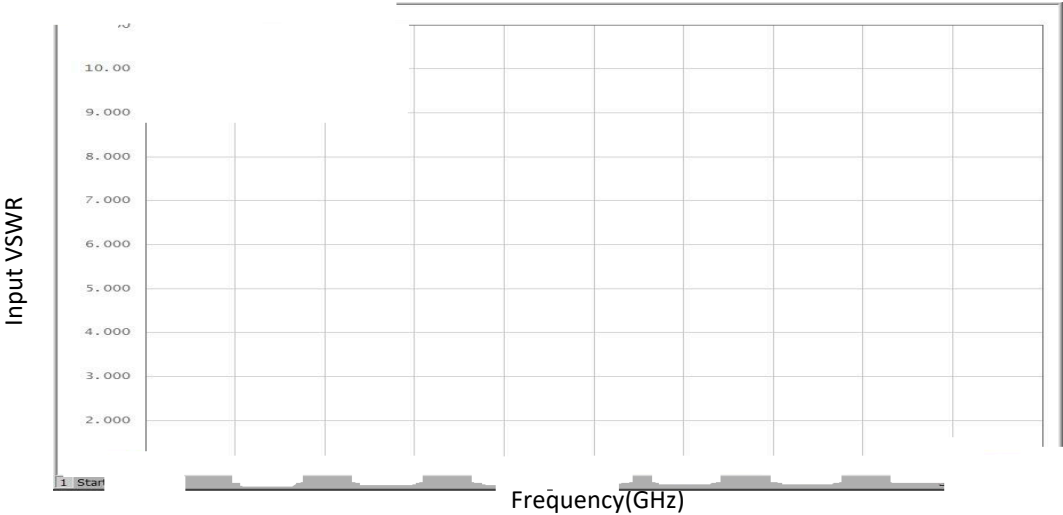

Output VSWR vs Frequency

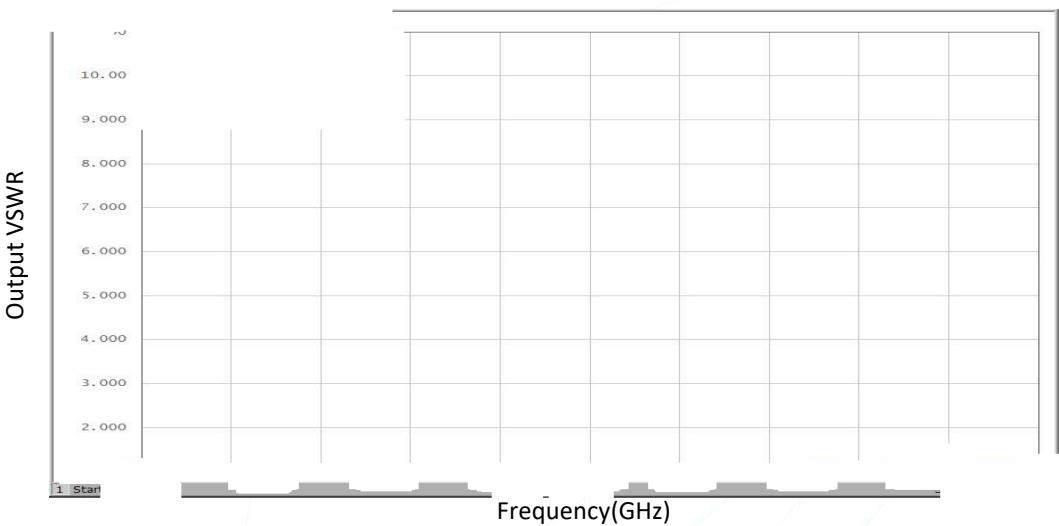


Coupling vs Frequency

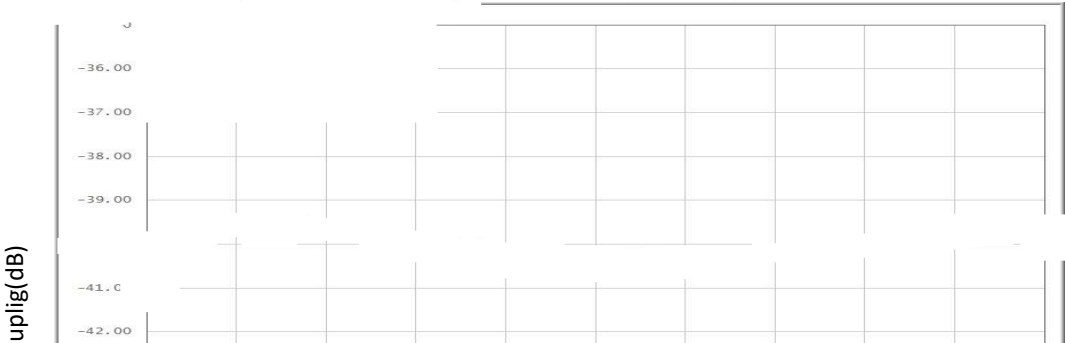

典型曲线 Typical Performance Data:

Isolation vs Frequency

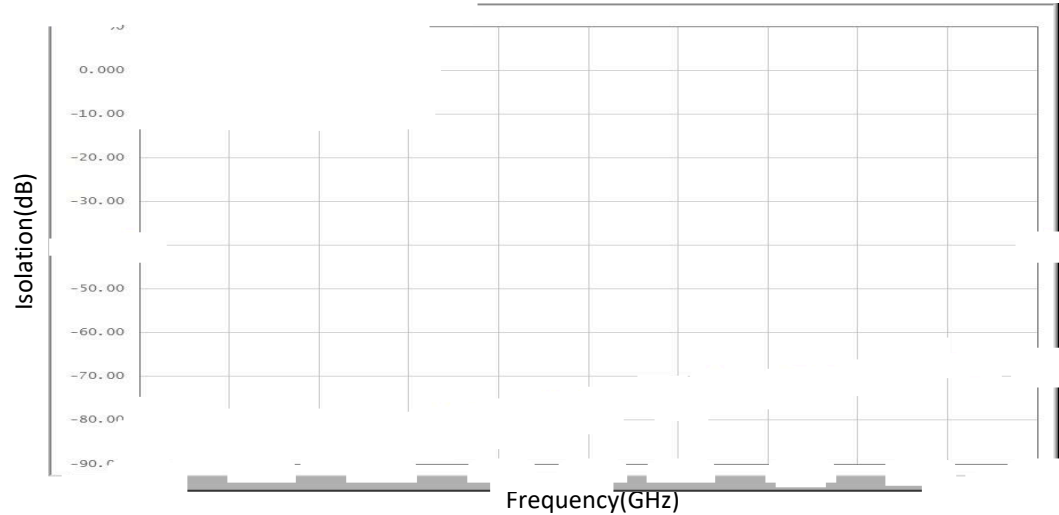

Insertion Loss vs Frequency

