

Part No.: TURTDC-00327041N300SMD

41dB Directional Coupler 0.3-2.7GHz

电气特性 Electrical:


工作频率 Frequency Range:	300-2700MHz
耦合度Coupling :	41±1.5dB
插入损耗 Insertion Loss:	0.3dB Max
驻波 VSWR:	1.20:1 Max
方向性 Directivity:	18.0dB Min
耐功率 Power Handling:	300 Watt
阻抗 Impedance:	50 OHMS

机械特性 Mechanical:

温度范围Temperature Range:	-55° C - +105° C
大小Size:	38.1mm*25.4mm
厚度Thickness:	3.3mm
相对湿度Relative Humidity:	0 ~ 90%

外形尺寸Outline Drawing:

Unit: mm

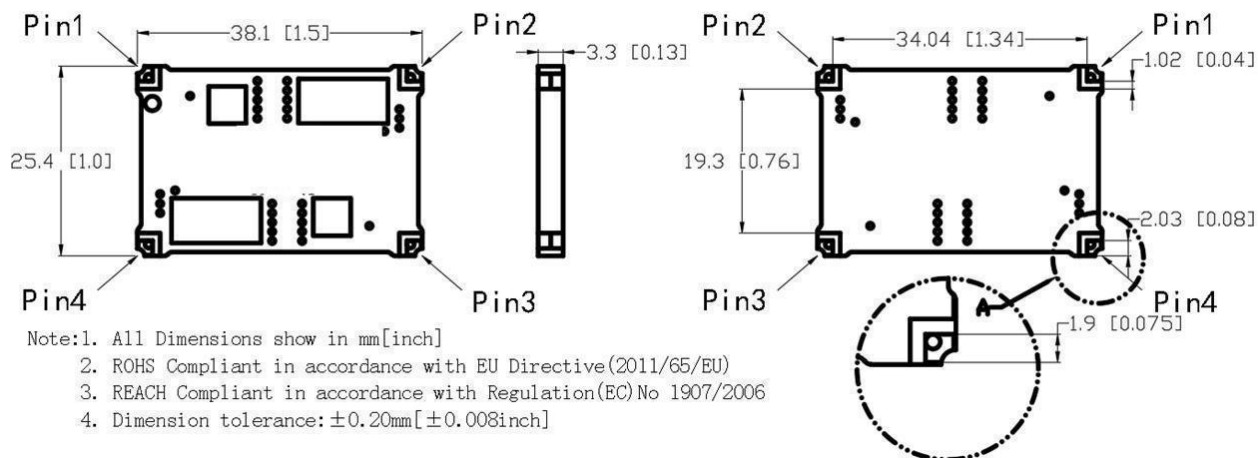

端口配置表 Port Configuration Table:

Hybrid Coupler Pin Configuration


PIN1	PIN2	PIN3	PIN4
Input	Reflected Coupled	Transmission	Forward Coupled
Transmission	Forward Coupled	Input	Reflected Coupled

Typical Performance Data


Frequency		MHz	300	600	900	1200	1500	1800	2100	2400	2700
Coupling		dB	-41.54	-40.33	-41.13	-41.46	-41.23	-40.37	-40.25	-39.72	-40.17
Insertion Loss		dB	-0.048	-0.055	-0.051	-0.065	-0.12	-0.099	-0.19	-0.23	-0.29
Directivity		dB	-37.53	-29.61	-25.99	-23.38	-20.47	-20.81	-20.47	-21.20	-22.99
VSWR	Input	/	1.07	1.10	1.11	1.07	1.05	1.12	1.17	1.12	1.10
	Transmission	/	1.06	1.10	1.10	1.07	1.04	1.10	1.14	1.10	1.08

典型曲线 Typical Performance Data:


Input VSWR vs Frequency

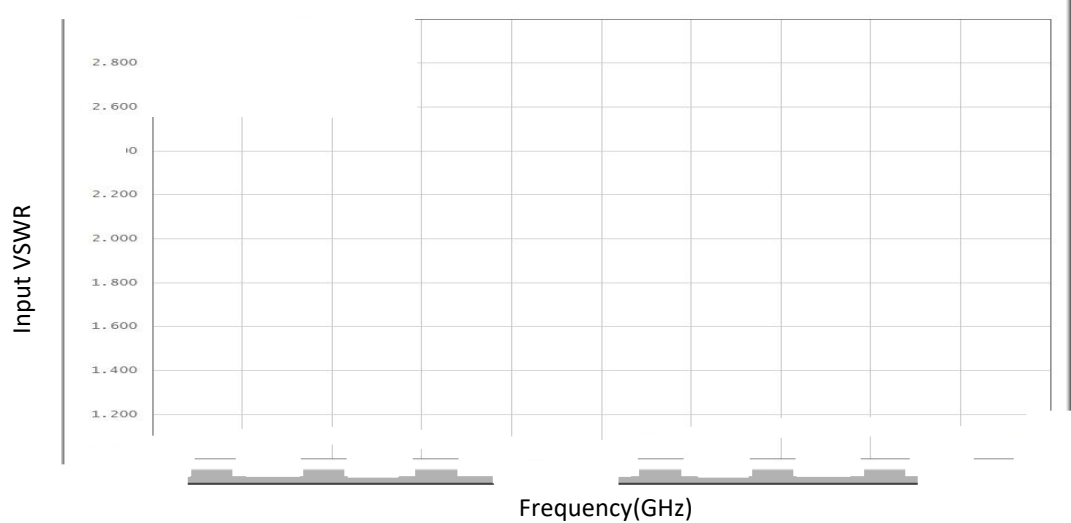

Transmission VSWR vs Frequency

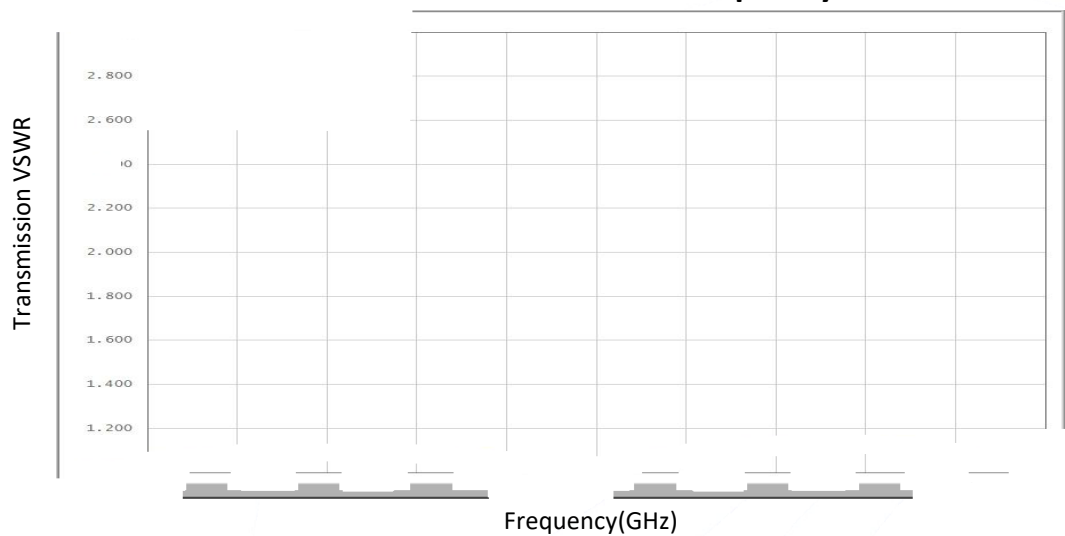


Coupling vs Frequency

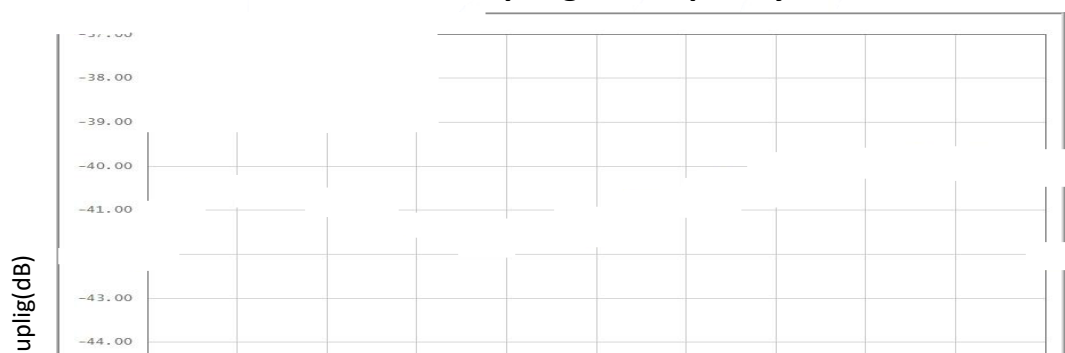

典型曲线 Typical Performance Data:

Isolation vs Frequency

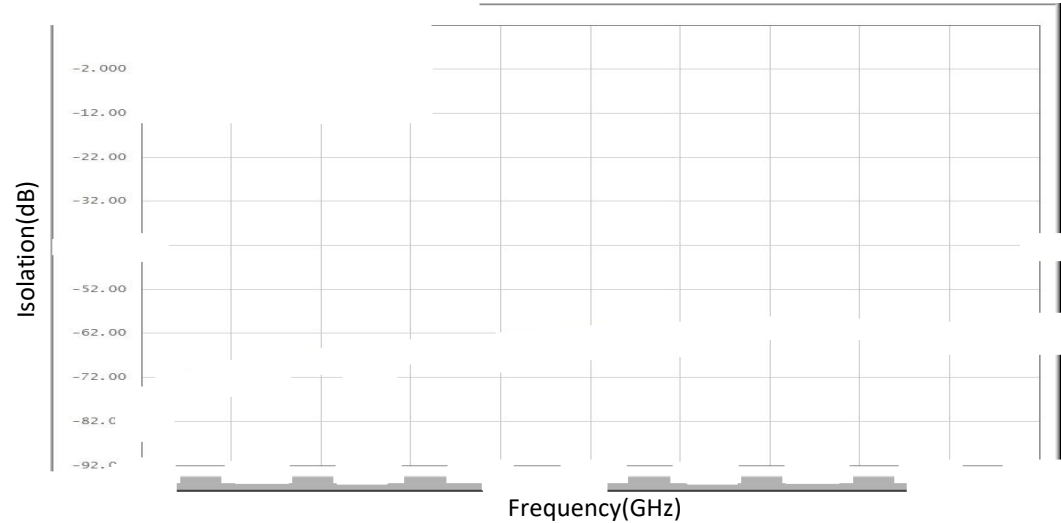

Insertion Loss vs Frequency

