

Part No.: TURTDC-0518010N

10dB Dual Directional Coupler N -Female 50Ω 0.5-18 GHz

电气特性 Electrical:

工作频率 Frequency Range: 0.5-18 GHz

耦合度 Coupling:: 10 ± 1.8 db

插入损耗 Insertion Loss: 2.2 db typ, 2.6db max

方向性 Directivity: : 12db typ, 10db min

驻波 VSWR: 1.6 max

耐功率 Power Handling: 50 Watt

阻抗 Impedance: 50 OHMS

机械特性 Mechanical:


温度范围 Temperature Range: $-45^{\circ}\text{C} - +85^{\circ}\text{C}$





接口 Connectors: N-Female

相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

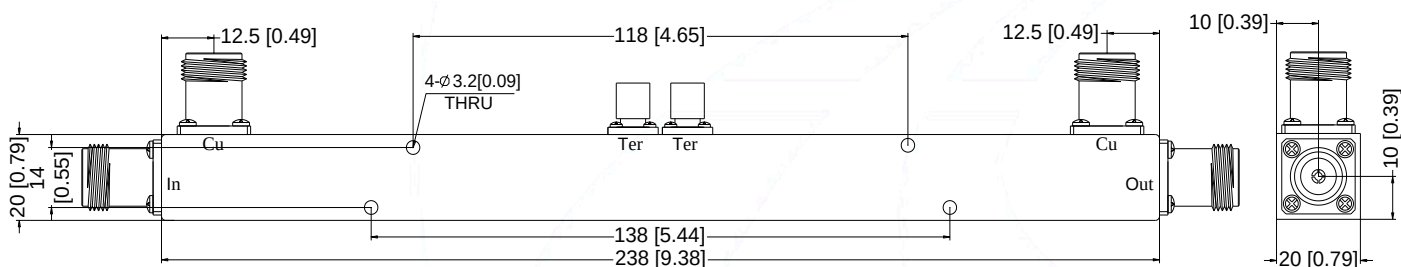

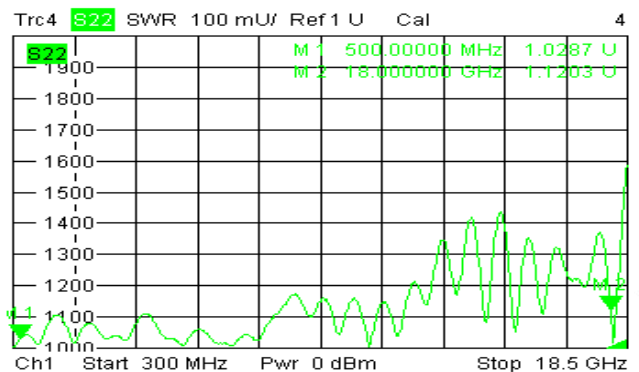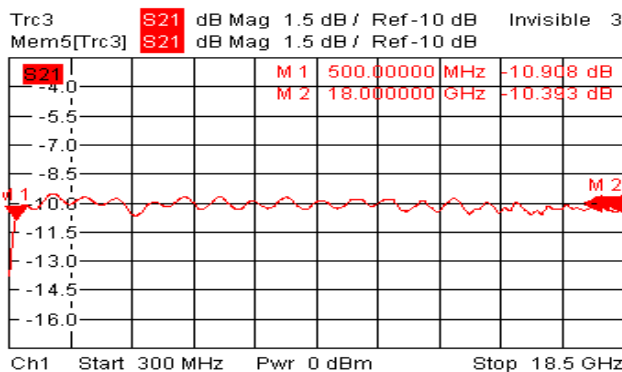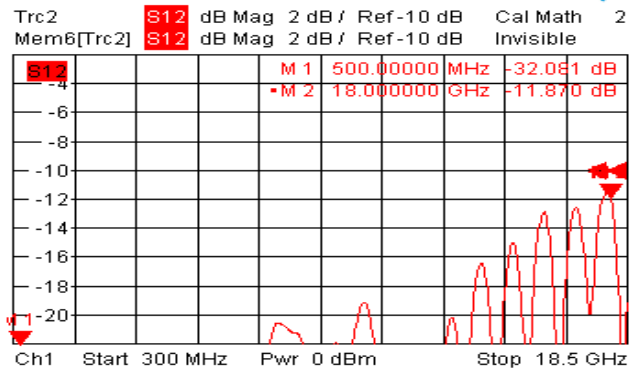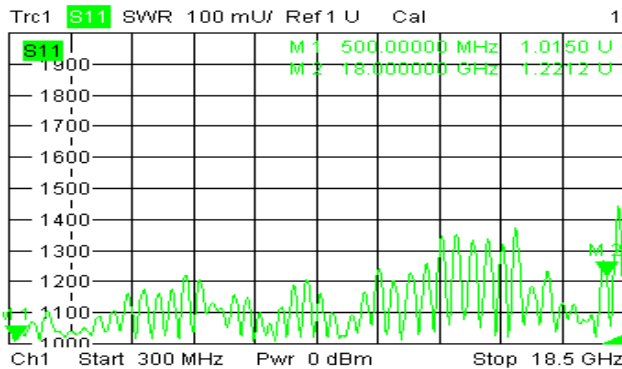


4/7/2020, 4:30 PM

Trc3 **S21** dB Mag 1.5 dB / Ref 0 dB Cal Invisible

Mem5[Trc3] **S21** dB Mag 1.5 dB / Ref 0 dB Invisible

3 of 4 (Memory)

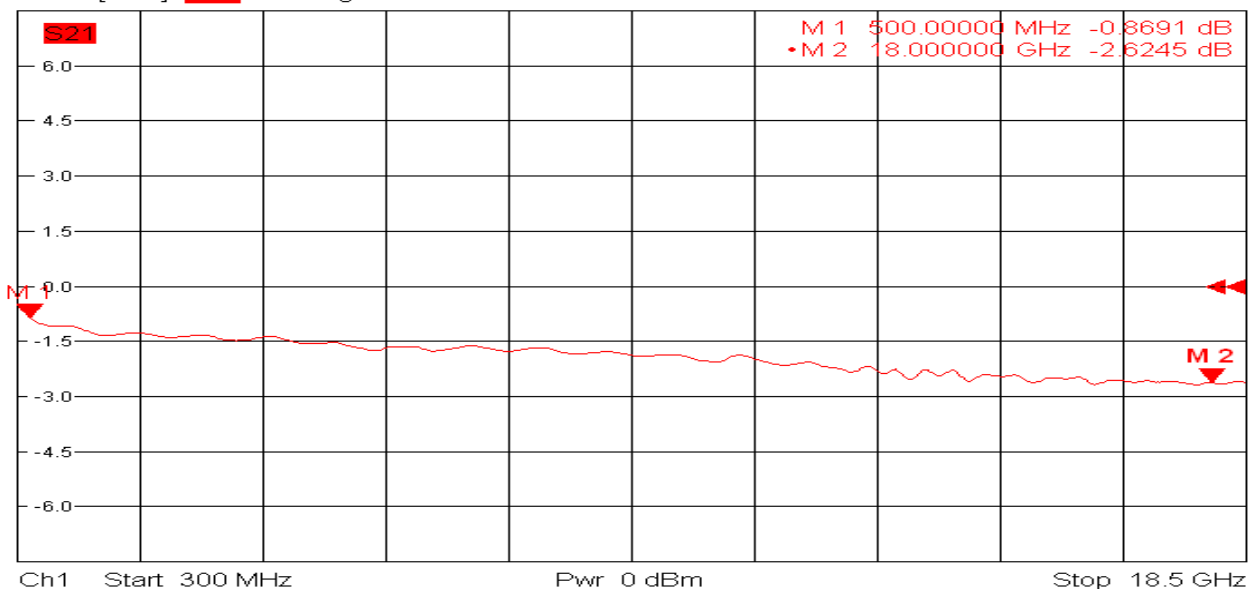

4/7/2020, 4:31 PM