

Part No: TURTDCBVMVM-2

5MHz-67GHz,60V,1.85mm Male-Male DC Block

## 电气特性 Electrical:

|                    |            |
|--------------------|------------|
| 工作频率 Frequency:    | 5MHz-67GHz |
| 插损 Insertion Loss: | 0.7 dBMax  |
| 驻波 VSWR:           | 1.3Max     |
| 工作电压 DC Voltage:   | 60 VOLTS   |
| 阻抗 Impedance:      | 50 OHMS    |




## 机械特性 Mechanical:

|                             |                     |
|-----------------------------|---------------------|
| 操作温度 Operation Temperature: | -55~+165°C          |
| 存储温度 Storage Temperature:   | -55~+165°C          |
| 壳体 Body Material:           | Stainless Steel 303 |
| 内导体 Center conductor:       | Becu, Golden        |
| 接口 Connectors:              | 1.85mm Male to Male |
| 相对湿度 Relative Humidity:     | 0 ~ 90%             |

## 外形尺寸 Outline Drawing:

Unit: mm

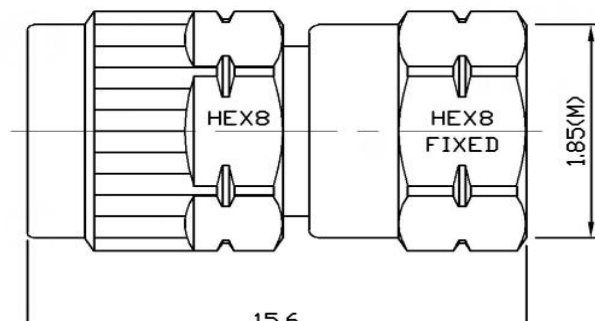

## 测试曲线 (Test Curve)

