

Model TURTG-90K43G16K

HIGH DIRECTIVITY BRIDGE COUPLER
90KHz-43 GHz, 16dB Coupling

- Feature:
- Ultra Wide Band:90KHz-43 GHz
 - High Directivity
 - Low VSWR
 - 50 Ohm Matched Input / Output

电气特性 Electrical:

参数Parameter		Min.	Typ.	Max.	单位Units
频率范围 Frequency range		90KHz-43			GHz
耦合度 Coupling			16.5±2.0		dB
插损 Insertion Loss				4.0	dB
方向性 Directivity		15			dB
回波损耗 Return Loss	输入端Input			-15	dB
	输出端Output			-14	dB
	耦合端Coupled			-12	dB
耐功率 Power				1	W
阻抗 Impedance		50			Ohms

机械特性 Mechanical :


参数Parameter	指标 Value
输入接口 Input Connector	2.92mm Female
输出接口 Output Connector	2.92mm Female
耦合接口 Coupled Connector	2.92mm Female
材料 Material	Cu
尺寸 Size	39.7×18.3×13.5 mm

绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
输入功率 RF Input Power	1W

外形尺寸Outline Drawing:

Unit: mm

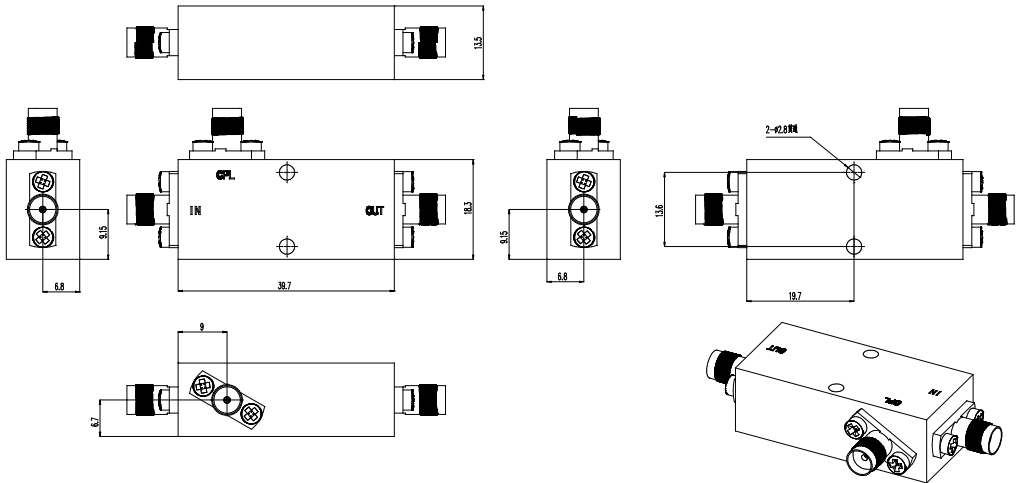

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:

参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	-40		+85	℃
存储温度 Non-operating Temperature	-55		+125	℃
相对湿度 Relative humidity		95		%
海拔 Altitude	10000		30000	feet
震动 Shock / Vibration(MIL-STD-810F)		Airborne		
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
TURTG-90K43G16K	HIGH DIRECTIVITY BRIDGE COUPLER 90KHz-43 GHz, 16dB Coupling,2.92mm Female	Rev.1.1