

Part No: TURTPSD10M40G2SN

10 MHz-40 GHz,微波宽带同轴检波器

电气特性 Electrical:


工作频率 Frequency:	10 MHz-40 GHz
灵敏度 Low Level Sensitivity:	0.5 mV/uW Typ, 0.35 mV/uW Min
驻波 VSWR:	2.0:1 Max
最大承受功率 Max Input Power:	100 mW
检波频响 Frequency Response:	± 1.75 dB Max
Negative output polarity standard. Add "P" to end of model number for positive output polarity	

机械特性 Mechanical:

操作温度 Operation Temperature:	$-20 \sim +70^{\circ}\text{C}$
存储温度 Storage Temperature:	$-40 \sim +85^{\circ}\text{C}$
壳体 Body Material:	Stainless Steel 303
内导体 Center conductor:	Becu, Golden
RF 输入接口 RF IN Connectors:	2.4mm Male
直流输出 DC OUT:	SMA Female
相对湿度 Relative Humidity:	0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

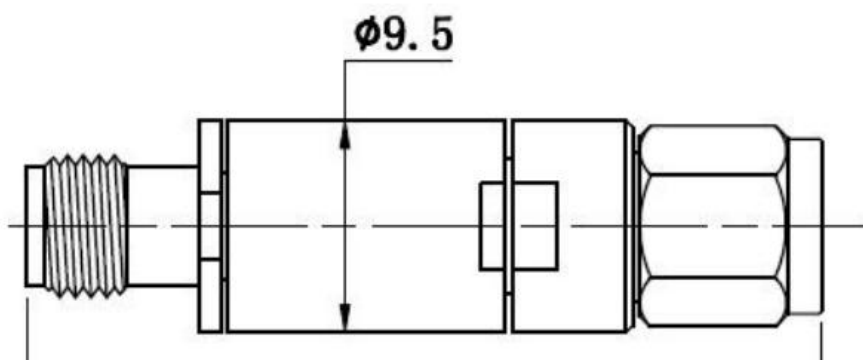

典型曲线 Typical Performance Data:

