

W

The <sup>TURTT200-4N</sup> is a well-matched, 50Ω male termination enabling operation from DC to 4 GHz. This termination features a 200W power rating and 1.25:1 max VSWR.

Features:

- Operating Frequency DC to 4 GHz
- High Return Loss
- Instrumentation Grade

Applications:

- laboratory test
- Communication equipment



电气特性 Electrical Characteristics:

| 参数 Parameter         | Min                      | Typ | Max  | 单位 Units |
|----------------------|--------------------------|-----|------|----------|
| 频率范围 Frequency Range | DC                       |     | 4    | GHz      |
| 驻波 VSWR              |                          |     | 1.25 | :1       |
| 耐功率 Power Handling   | ≤200Watts Average at 25℃ |     |      | W        |
| 阻抗 Impedance         |                          | 50  |      | Ohms     |

环境和机械特性 Envrionmental And Physical Characteristics:

| 类型 Description            | 参数 Parameter | 单位 Units |
|---------------------------|--------------|----------|
| 操作温度 Operating Temerature | -30 To +65   | ℃        |
| 存储温度 Storage Temperature  | -30 To +65   | ℃        |
| 壳体颜色 Body Color           | Black        |          |
| 接口 Connectors             | N Male       |          |
| 重量 Weight                 | 1.2          | Kg       |
| 相对湿度 Relative Humidity    | 0-95%        |          |


外形图 Outline Drawing: Unit:mm

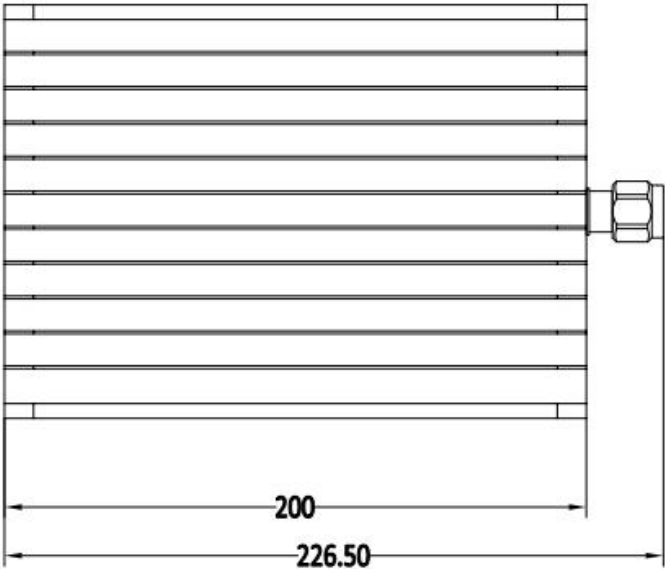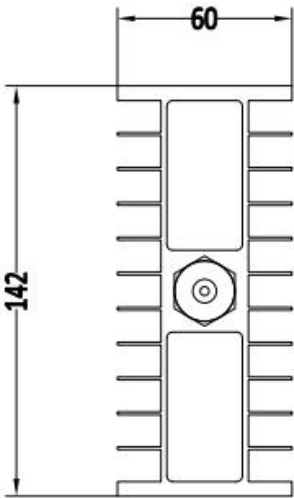

订货信息 Ordering Information:

| 标准型号 Base Number | 描述 Description                          |
|------------------|-----------------------------------------|
| TURTT200-4N      | DC-4GHz,200W,N male Coaxial Termination |

典型曲线 Typical Performance Data:

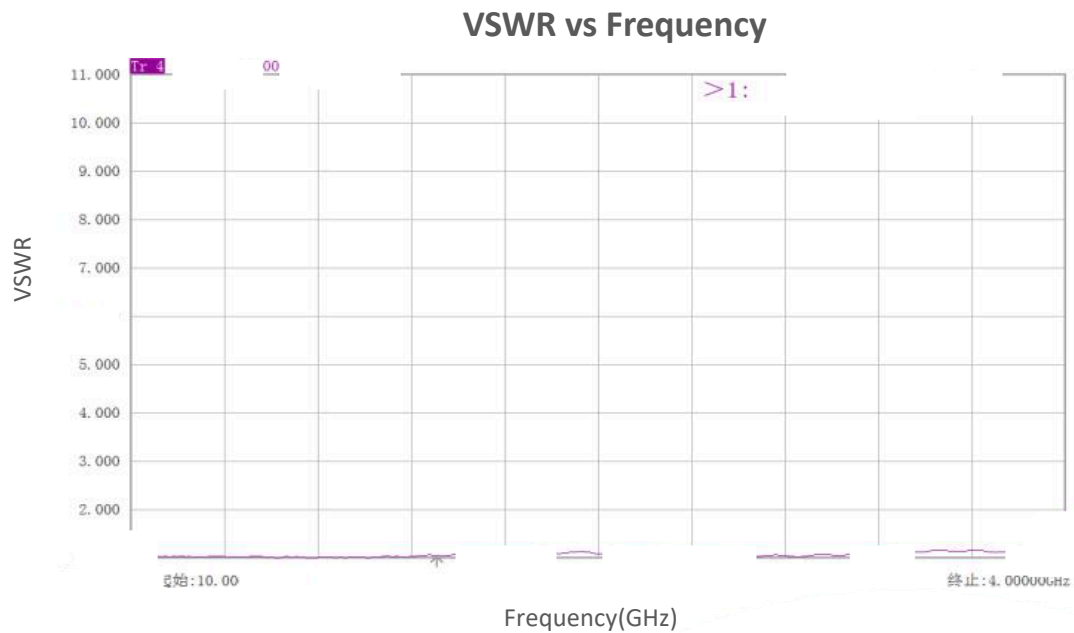

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.