


TalentWMM

A部局部视图(20:1)

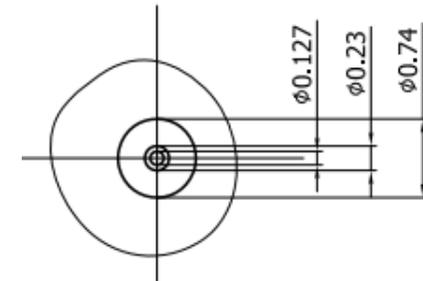

Electrical & Environmental Characteristics

Impedance	50 Ohm
Operating Frequency	DC-110GHz
Connector	1.0mm Female
Insertion Loss	0.05* $\sqrt{f_GHz}$
VSWR	1.50 Typ
Interface	MIL-STD-348A
Operating Temperature	-40~+165°C

Material & Coat-Plating

Contact	BeCu C17300 GOLD PLATE
---------	------------------------

THIS DRAWING IS A CONTROLLED DOCUMENT

DWN

CHK

Turpanic Co, Ltd ,Inc

Unit
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED

0 PLC ± 0.25
 1 PLC ± 0.15
 2 PLC ± 0.12
 3 PLC \pm
 3 PLC \pm
 ANGLES $\pm 1^\circ$

PRODUCT SPEC

APPLICATION SPEC

1.0-KFDEL23

1.0mm FEMALE
 END LAUNCH CONNECTOR