


C

C

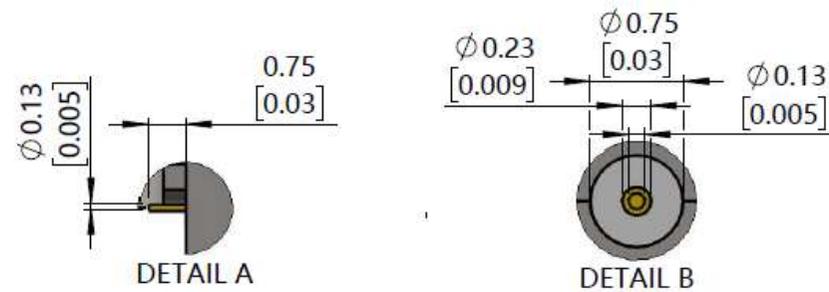

B

B

Electrical & Environmental Characteristics

Impedance	50 Ohm
Operating Frequency	DC-67GHz
Connector	1.85mm Female
Insertion Loss	0.05* $\sqrt{f_GHz}$
VSWR	1.30 Typ
Interface	MIL-STD-348A
Operating Temperature	-40~+165°C

Material & Coat-Plating

Contact	BeCu C17300 GOLD PLATE
Housing	SUS303

A

THIS DRAWING IS A CONTROLLED DOCUMENT

DWN

CHK

Turpanic Co, Ltd ,Inc

Unit
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED

0 PLC ± 0.25
 1 PLC ± 0.15
 2 PLC ± 0.12
 3 PLC \pm
 3 PLC \pm
 ANGLES $\pm 1^\circ$

APVD
 PRODUCT SPEC
 APPLICATION SPEC

1.85-KFDEL13
1.85mm FEMALE
END LAUNCH CONNECTOR

MATERIAL FINISH WEIGHT SIZE A4 GAGE CODE OT8L4 DRAWING NO

A