


C

C

Electrical & Environmental Characteristics	
Impedance	50 Ohm
Operating Frequency	DC-67GHz
Connector	1.85mm Female
Insertion Loss	0.05* $\sqrt{f\_GHz}$
VSWR	1.30 Typ
Interface	MIL-STD-348A
Operating Temperature	-40~+165°C
Material & Coat-Plating	
Contact	BeCu C17300 GOLD PLATE
Housing	SUS303

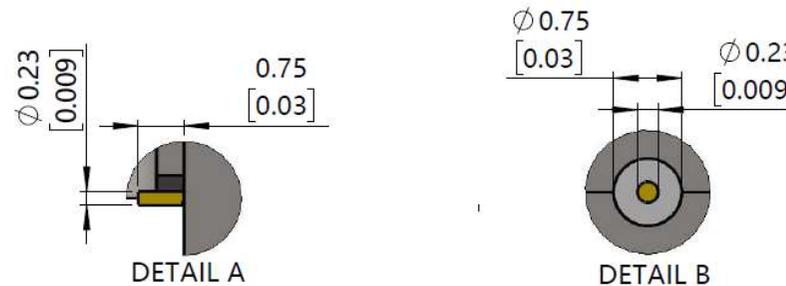

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Turpanic Co, Ltd	,Inc
		CHK		
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED	APVD	1.85-KFDEL23	
	0 PLC ±0.25		1.85mm FEMALE	
	1 PLC ±0.15	PRODUCT SPEC	END LAUNCH CONNECTOR	
	2 PLC ±0.12			
	3 PLC ±	APPLICATO N SPEC		
	3 PLC ±			
	ANGLES ±1°			
		SIZE	GAGE CODE	DRAWING NO