


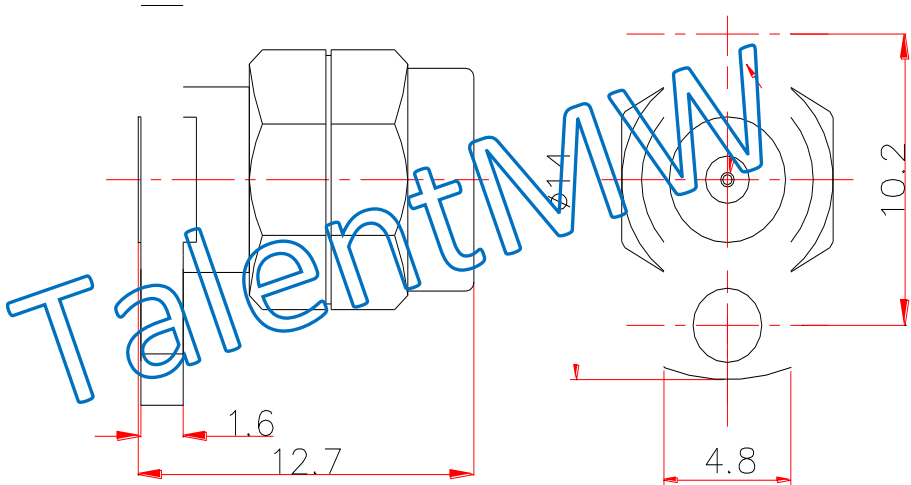

Electrical & Environmental Characteristics	
Impedance	50 Ohm
Insulation Resistance	3000 MΩ
Operating Frequency	50GHz
Dielectric Withstanding Voltage	750 V
VSWR	1.15
Insertion Loss	0.05* $\sqrt{f_{\text{GHz}}}$
Operating Temperature	-55~+165℃
Material & Coat-Plating	
Inner Conductor	Beryllium Copper, Gold
Dielectric	PEI
Body	Stainless Steel, Passivated
Coupling Nut	Stainless Steel, Passivated

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Turpanic Co, Ltd ,Inc			
		CHK				
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED 0 PLC ±0.25 1 PLC ±0.15 2 PLC ±0.12 3 PLC ±- 3 PLC ±- ANGLES ±1°	APVD	Product Mode 2.4-JFD80520 2.4 Male Flange Connector			
		PRODUCT SPEC				
		APPLICATION SPEC				
		WEIGHT				
MATERIAL SEE TABLE	FINISH SEE TABLE	SIZE A4	GAGE CODE 0T8L4	DRAWING NO		
CUSTOMER DRAWING			SCALE 4: SCALE 4: 1	SHEET1 OF 1	RVE 1	