


—
 C
 —

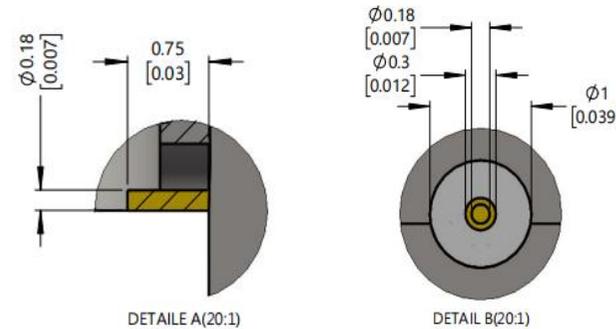

Electrical & Environmental Characteristics	
B Impedance	50 Ohm
Operating Frequency	DC-50 GHz
Connector	2.4mm Female
Insertion Loss	0.05* $\sqrt{f_GHz}$
VSWR	1.25 Typ
Interface	MIL-STD-348A
Operating Temperature	-40~+165 °C
Material & Coat-Plating	
Contact	BeCu C17300 GOLD PLATE
A Housing	SUS303
Bead	PTFE

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Turpanic Co, Ltd ,Inc		
		CHK			
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED		2.4-KFDEL18 2.4mm FEMALE END LAUNCH CONNECTOR		
	0 PLC	±0.25			PRODUCT SPEC
	1 PLC	±0.15			
	2 PLC	±0.12			
3 PLC	±	APPLICATION SPEC			
3 PLC	±				
ANGLES ±1°					
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	SIZE A4	GAGE CODE OT8L4	DRAWING NO

A
 —