


C

C

Electrical & Environmental Characteristics	
Impedance	50 Ohm
Operating Frequency	DC-50 GHz
Connector	2.4mm Female
Insertion Loss	0.05* $\sqrt{f_GHz}$
VSWR	1.25 Typ
Interface	MIL-STD-348A
Operating Temperature	-40~+165°C

Material & Coat-Plating	
Contact	BeCu C17300 GOLD PLATE
Housing	SUS303
Bead	PTEF

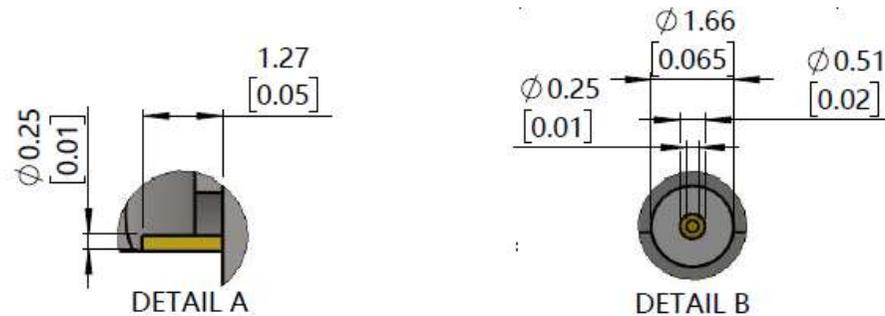

THIS DRAWING IS A CONTROLLED DOCUMENT

DWN

CHK

Turpanic Co, Ltd ,Inc

Unit mm

TOLERANCES UNLESS OTHERWISE SPECIFIED

0 PLC ±0.25
 1 PLC ±0.15
 2 PLC ±0.12
 3 PLC ±
 3 PLC ±
 ANGLES ±1°

APVD

PRODUCT SPEC

APPLICATION SPEC

2.4-KFDEL25
2.4mm FEMALE
END LAUNCH CONNECTOR

MATERIAL	FINISH	WEIGHT	SIZE A4	GAGE CODE OT8L4	DRAWING NO
----------	--------	--------	---------	-----------------	------------

A

A