


C

C

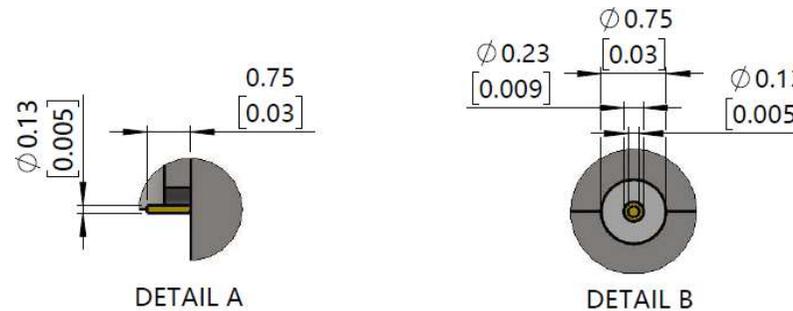

B

Electrical & Environmental Characteristics

Impedance	50 Ohm
Operating Frequency	DC-40 GHz
Connector	2.92mm Female
Insertion Loss	0.05* $\sqrt{f_GHz}$
VSWR	1.20 Typ
Interface	MIL-STD-348A
Operating Temperature	-40~+165°C

Material & Coat-Plating

Contact	BeCu C17300 GOLD PLATE
Housing	SUS303
Bead	PTEF

A

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Turpanic Co, Ltd ,Inc	
		CHK		
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED	APVD	2.92-KFDEL13 2.92mm FEMALE END LAUNCH CONNECTOR	
	0 PLC ±0.25 1 PLC ±0.15 2 PLC ±0.12 3 PLC ± 3 PLC ± ANGLES ±1°	PRODUCT SPEC		
		APPLICATION SPEC		
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	SIZE A4	GAGE CODE OT8L4
			DRAWING NO	

A