


—

C

—

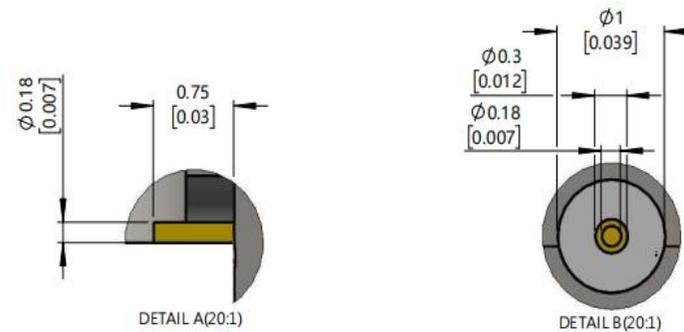

C

B

A

Electrical & Environmental Characteristics

B Impedance	50 Ohm
Operating Frequency	DC-40 GHz
Connector	2.92mm Female
Insertion Loss	0.05* $\sqrt{f_{GHz}}$
VSWR	1.2 Typ
Interface	MIL-STD-348A
Operating Temperature	-40~+165 °C

Material & Coat-Plating

Contact	BeCu C17300 GOLD PLATE
A Housing	SUS303

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	
		CHK	Turpanic Co, Ltd ,Inc
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED	APVD	2.92-KFDEL18 2.92mm FEMALE END LAUNCH CONNECTOR
	0 PLC ±0.25 1 PLC ±0.15 2 PLC ±0.12 3 PLC ± 3 PLC ± ANGLES ±1°	PRODUCT SPEC	
		APPLICATON SPEC	
MATEIAL	FINISH	WEIGHT	SIZE A4 GAGE CODE OT8L4 DRAWING NO