


C

C

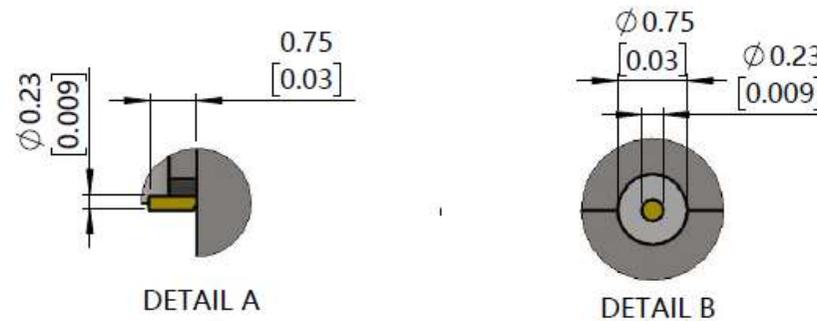

### Electrical & Environmental Characteristics

Impedance	50 Ohm
Operating Frequency	DC-40 GHz
Connector	2.92mm Female
Insertion Loss	0.05* $\sqrt{f\_GHz}$
VSWR	1.20 Typ
Interface	MIL-STD-348A
Operating Temperature	-40~+165°C

### Material & Coat-Plating

Contact	BeCu C17300 GOLD PLATE
Housing	SUS303

THIS DRAWING IS A CONTROLLED DOCUMENT

DWN

CHK

Turpanic Co, Ltd ,Inc

Unit  
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED

0 PLC ±0.25  
 1 PLC ±0.15  
 2 PLC ±0.12  
 3 PLC ±  
 3 PLC ±  
 ANGLES ±1°

APVD

PRODUCT SPEC

APPLICATION SPEC

**2.92-KFDEL23**  
**2.92mm FEMALE**  
**END LAUNCH CONNECTOR**

SIZE

GAGE CODE

DRAWING NO