


C

C

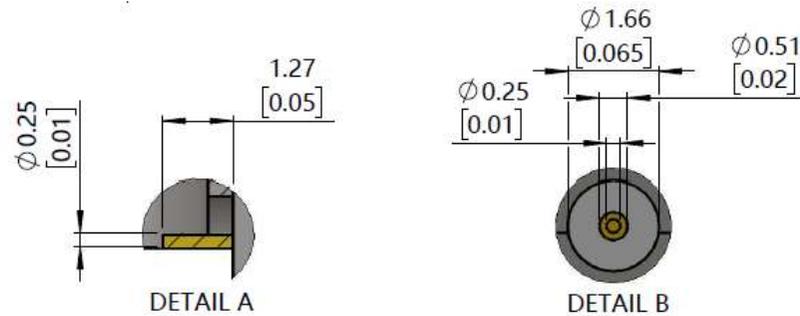

B

Electrical & Environmental Characteristics	
B Impedance	50 Ohm
Operating Frequency	DC-40 GHz
Connector	2.92mm Female
Insertion Loss	0.05* $\sqrt{f_GHz}$
VSWR	1.20 Typ
Interface	MIL-STD-348A
Operating Temperature	-40~+165°C
Material & Coat-Plating	
Contact	BeCu C17300 GOLD PLATE
A Housing	SUS303
Bead	PTFE

A

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Turpanic Co, Ltd ,Inc		
		CHK			
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED	APVD	2.92-KFDEL25 2.92mm FEMALE END LAUNCH CONNECTOR		
	0 PLC ±0.25	PRODUCT SPEC			
1 PLC ±0.15					
2 PLC ±0.12					
	3 PLC ±-	APPLICATO N SPEC			
	3 PLC ±-				
	ANGLES ±1°				
MATEIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	SIZE A4	GAGE CODE OT8L4	DRAWING NO

A