


	产品规格书 <b>Product Specification</b>	规格型号 <b>Product Mode</b>
		<b>F5-SMAMNM-L</b>

示意图 Sketch Map:

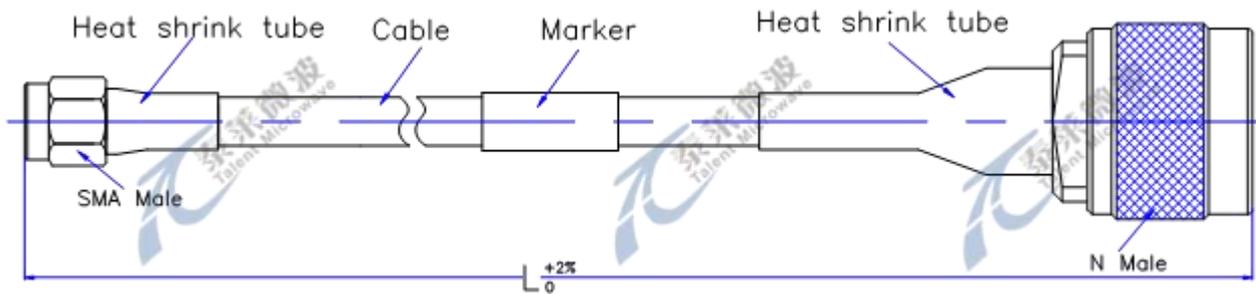

**电性能&机械性能 Electrical & Mechanical Characteristics**

特性阻抗 Impedance(Ohm)	50
截止频率 Operating Frequency(GHz)	5.0
介质耐压 Dielectric Withstanding Voltage(V)	2000
电压驻波比 VSWR	1.35:1@5GHz
屏蔽效率 Shielding Effectiveness(dB)	80
传播速率 Velocity Of Propagation (%)	70
静态最小弯曲半径 Min. Bending Radius Static (mm)	40
工作温度 Operating Temperature(°C)	-55~+125
电缆直径 Cable Diameter (mm)	7.11

产品型号 Part Number	最大插入损耗 Max Insertion Loss ≤ (dB)			
	0.4GHz	1.0GHz	3.0GHz	5.0GHz
F5-SMAMNM-0.5M	0.12	0.21	0.38	0.51
F5-SMAMNM-1.0M	0.21	0.35	0.66	0.89
F5-SMAMNM-2.0M	0.38	0.64	1.21	1.65
电缆连续波功率 Power CW for Cable (Watts)	1200	750	425	375

接头类型和长度可接受定制，型号编码指南

(part number coding for different connector and different length)

