


	产品规格书 <b>Product Specification</b>	规格型号 <b>Product Mode</b>
		<b>F6-SMAMSMAM-L</b>

示意图 Sketch Map:

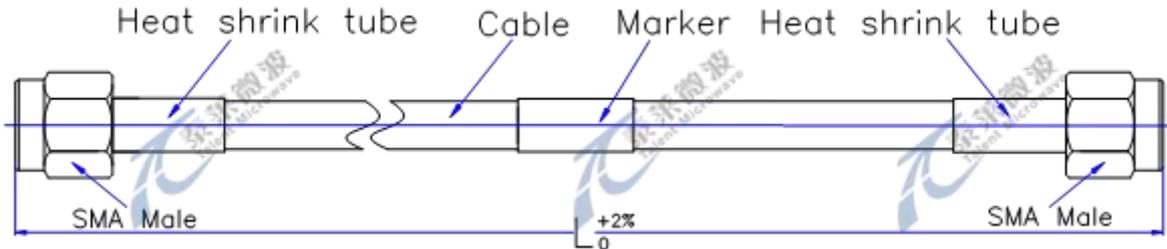

**电性能&机械性能 Electrical & Mechanical Characteristics**

特性阻抗 Impedance(Ohm)	50
截止频率 Operating Frequency(GHz)	3.0
介质耐压 Dielectric Withstanding Voltage(V)	500
电压驻波比 VSWR	1.35:1@3GHz
屏蔽效率 Shielding Effectiveness(dB)	60
传播速率 Velocity Of Propagation (%)	70
静态最小弯曲半径 Min. Bending Radius Static (mm)	13
工作温度 Operating Temperature(°C)	-55~+125
电缆直径 Cable Diameter (mm)	2.5

产品型号 Part Number	最大插入损耗 Max Insertion Loss ≤ (dB)			
	0.1GHz	0.4GHz	1.0GHz	3.0GHz
F6-SMAMSMAM-0.5M	0.16	0.30	0.49	0.87
F6-SMAMSMAM-1.0M	0.29	0.57	0.92	1.64
F6-SMAMSMAM-2.0M	0.55	1.10	1.78	3.17
电缆连续波功率 Power CW for Cable (Watts)	340	170	110	60

接头类型和长度可接受定制，型号编码指南

(part number coding for different connector and different length)

