


0.86mm SS-SS Cryogenic Cable Assemblies

G034SS /SMA Male / SMA Male/DC-18 GHz      Model: G034SS-SMAMSMAM-L

Features:

- Max Frequency 18 GHz
- VSWR max of 1.35

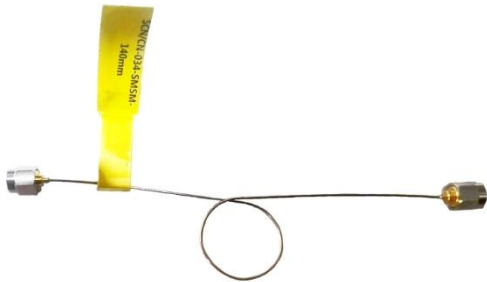


Electrical Characteristics:

| Parameter               | Min | Typ  | Max  | Units |
|-------------------------|-----|------|------|-------|
| Frequency Range         | DC  |      | 18   | GHz   |
| VSWR                    |     | 1.25 | 1.35 | :1    |
| Shielding Effectiveness |     | 110  |      | dB    |
| Capacitance             |     |      | 98   | pF/m  |
| Impedance               |     | 50   |      | ohm   |

Applications:

- Dilution refrigerators/Cryogenic devices
- Quantum Computing
- Vacuum Chambers

Cable Cross Section:

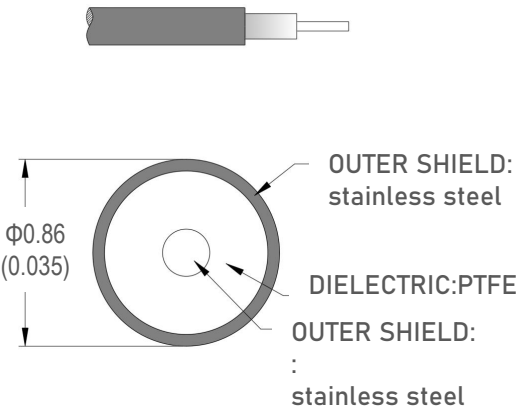

Envrionmental And Physical Characteristics:

| Description                 | Parameter           | Units |
|-----------------------------|---------------------|-------|
| Cable Diameter              | 0.86                | mm    |
| Min. Bending Radius         | 5.0                 | mm    |
| Thermal conductivity@4-20K* | 25 (for 10cm cable) | μw/k  |
| Operating Temerature        | 4K to +100          | °C    |
| Storage Temerature          | -55 to +200         | °C    |

\* Note: Heat quantity required for one end of 10 cm long cable (excluding connectors) to reach 20 K when 4 K heat anchor is applied to the other end of the cable.


Cable Performance By Frequency

| Frequency | 0.5 GHz | 1GHz | 5 GHz | 10 GHz | 20 GHz |
|-----------|---------|------|-------|--------|--------|
|-----------|---------|------|-------|--------|--------|

Connectors:

| Description                  | Connector 1               | Connector 2               |
|------------------------------|---------------------------|---------------------------|
| Type                         | SMA Straight Male         | SMA Straight Male         |
| Contact Matericl And Plating | Beryllium bronze, Gold    | Beryllium bronze, Gold    |
| Dielectric Type              | PTFE                      | PTFE                      |
| Body Matericl And Plating    | Beryllium bronze Or SS304 | Beryllium bronze or SS304 |
| Insertion Loss (dB Max)      | 0.05* $\sqrt{f\_GHz}$     | 0.05* $\sqrt{f\_GHz}$     |

Outline Drawing:

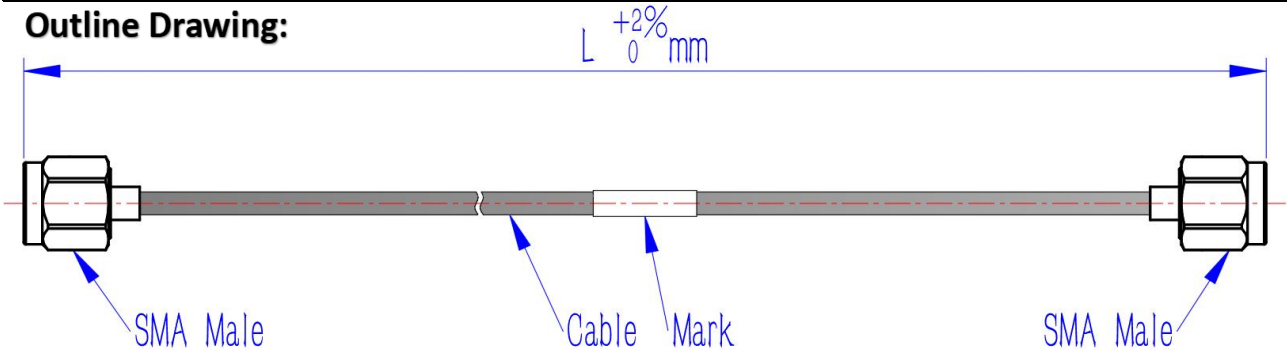

Ordering Information:

| Base Number     | Lenth (Unit mm) | Custom Design Services                                  |
|-----------------|-----------------|---------------------------------------------------------|
| G034SS-SMAMSMAM | -L              | LEAVE BLANK(NOT REQUIRED)<br>-Loop (Stress relief loop) |