


	产品规格书 <b>Product Specification</b>	规格型号 <b>Product Mode</b>
		<b>L2-SMAMSMAM-L</b>

示意图 Sketch Map:

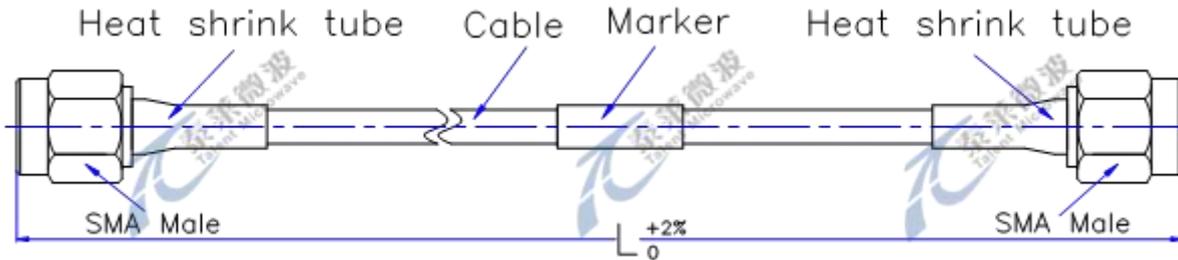

**电性能&机械性能 Electrical & Mechanical Characteristics**

特性阻抗 Impedance(Ohm)	50
截止频率 Operating Frequency(GHz)	5.8
介质耐压 Dielectric Withstanding Voltage(V)	1000
电压驻波比 VSWR	1.30:1@5.8GHz
屏蔽效率 Shielding Effectiveness(dB)	90
传播速率 Velocity Of Propagation (%)	80
静态最小弯曲半径 Min. Bending Radius Static (mm)	12.7
工作温度 Operating Temperature(°C)	-40~+85
电缆直径 Cable Diameter (mm)	4.95

产品型号 Part Number	最大插入损耗 Max Insertion Loss ≤ (dB)			
	0.9GHz	1.5GHz	2.5GHz	5.8GHz
L2-SMAMSMAM-0.5M	0.25	0.32	0.42	0.65
L2-SMAMSMAM-1.0M	0.43	0.56	0.73	1.14
L2-SMAMSMAM-2.0M	0.79	1.04	1.35	2.12
电缆连续波功率 Power CW for Cable (Watts)	160	120	90	60

接头类型和长度可接受定制，型号编码指南

(part number coding for different connector and different length)

