

General Description:

MM-CICICI-040080-Cryo are ultra-low insertion loss cryogenic circulators operating in the 4-8 GHz frequency range. They have been designed from ground up to meet the strict requirements of ultra-low temperature physics research. The OFHC copper body ensures minimum loss and that this loss reaches the lowest possible temperature to minimize thermal noise.

Features:

- Ultra Wide Band:4-8GHz
- Ultra Broadband, Multi-Octave
- Superior Phase & Amplitude Balance

Applications:

- quantum computing

Electrical Specifications :


Parameter	Value			Units
	Min	Typ	Max	
Frequency Range	4		8	GHz
Insertion Loss		0.6		dB
Return loss		-18		:1
Isolation		60		dB
Impedance		50		Ω

Mechanical Specifications:

Parameter	Value
Size	69.9×25.5×13.7 mm
Weight	225g
Material / Finishing	OFHC Copper/Nickel plated

SMA-K

Outline Drawing:

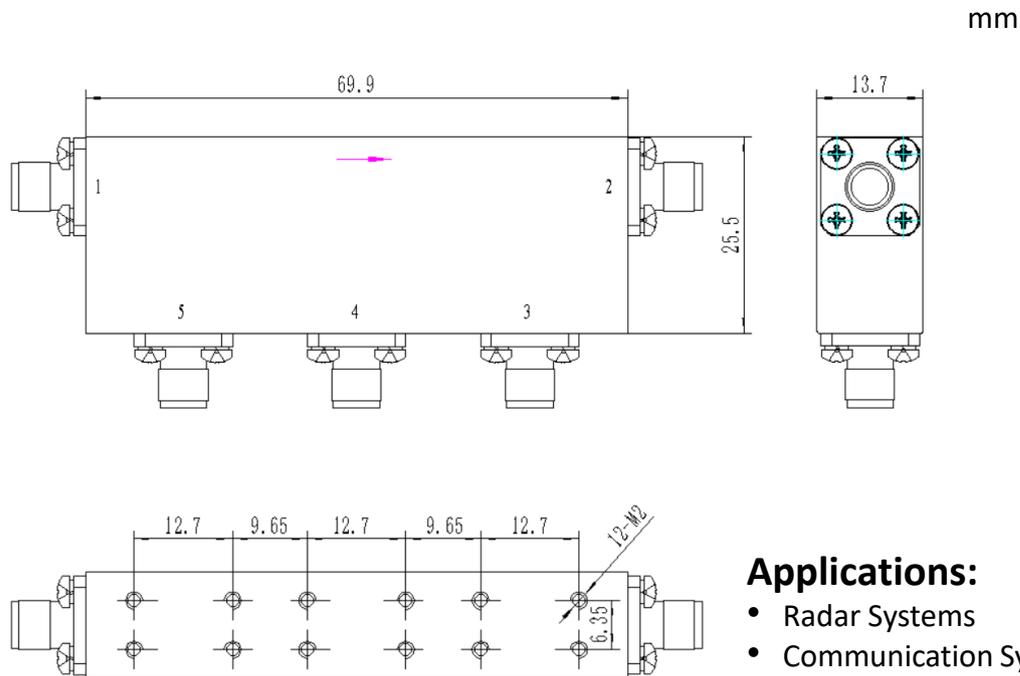



Applications:

- Radar Systems
- Communication Systems
- Receivers Systems



Environmental Conditions:

Parameter	Standard	Description
Operational Temperature		4 K (-269 °C)
Storage Temperature		-55°C~+85°C
Random Vibration	MIL-STD-883K, Method 2026, Cond. IB	50 - 2000 Hz, 7.3 Grms
Humidity	MIL-STD-202, Method 103B, Cond. B	100% RH at 35c, 95%RH at 40°C
Altitude	MIL-STD-883K, Method 1001, Cond. C	50,000 feet

Measured data:

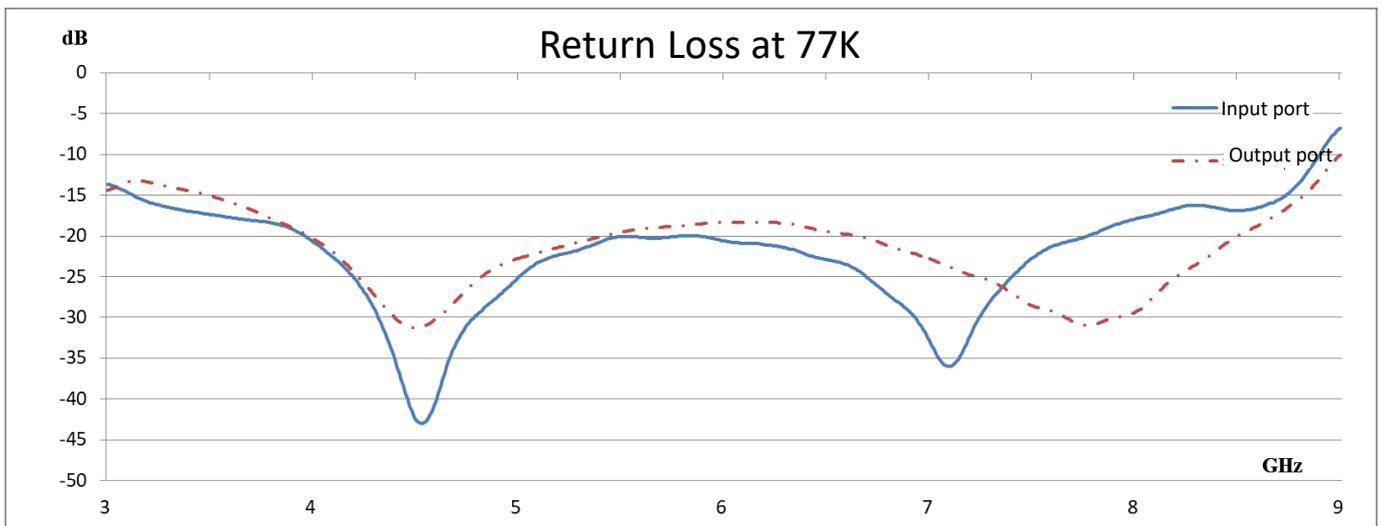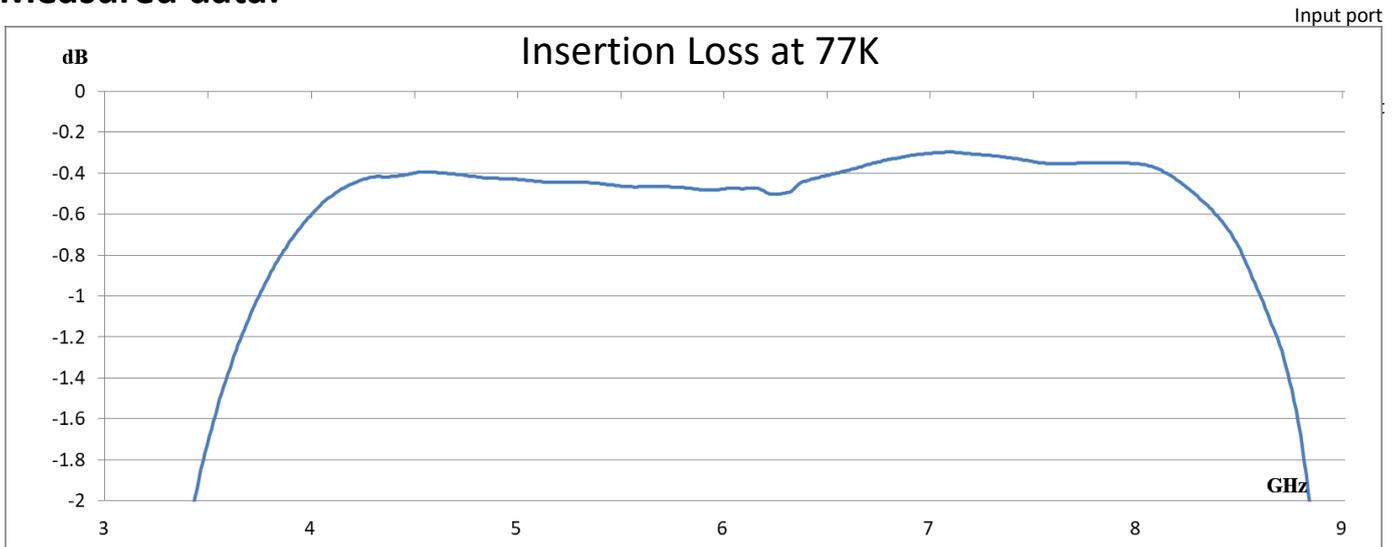

Isolation at 77K

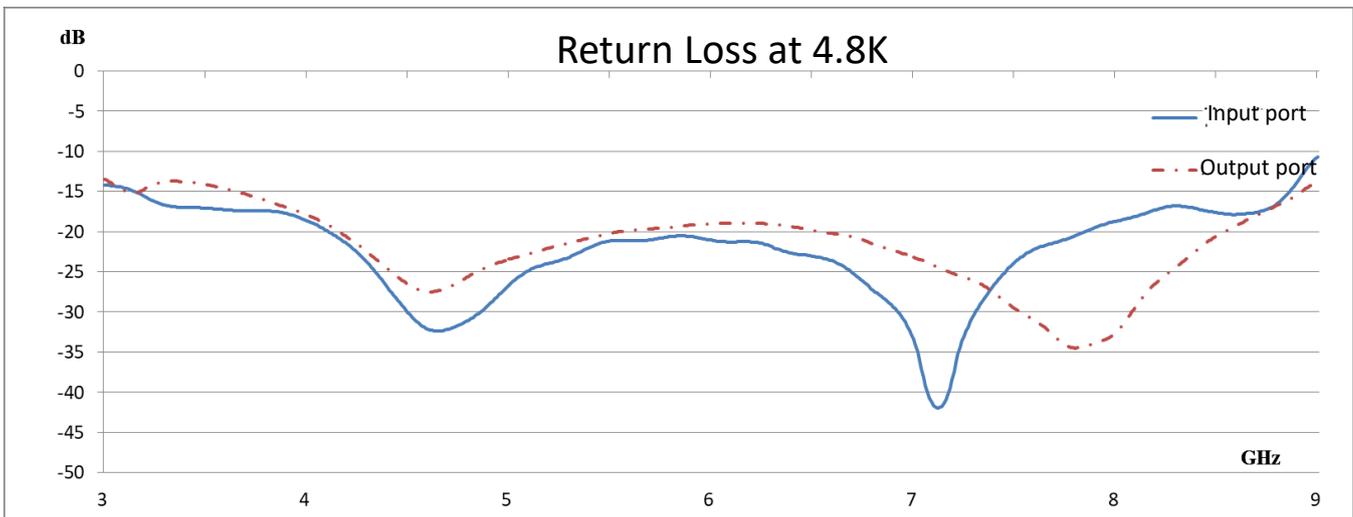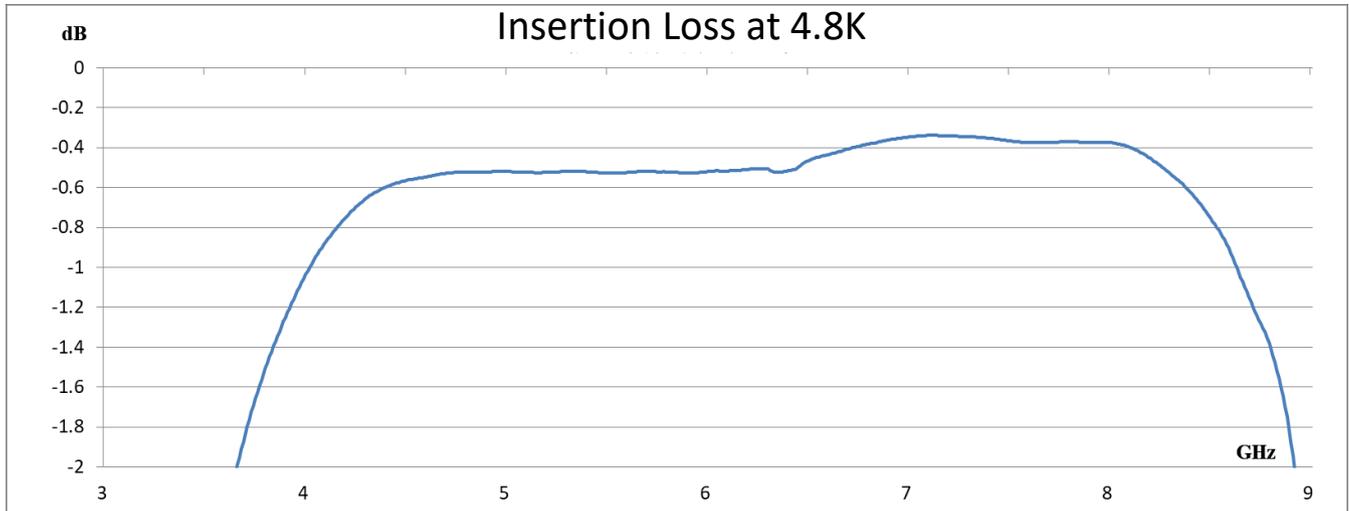

Isolation at 4.8K