

SP6T Coaxial Switches

R16-CN12005-D , Coaxial Switches , 1P6T , SC , Normally Open , 12VDC , NO TTL , DC to 5 GHz , DSUB-15

R16-CN24005-D , Coaxial Switches , 1P6T , SC , Normally Open , 24VDC , NO TTL , DC to 5 GHz , DSUB-15

R16-CN28005-D , Coaxial Switches , 1P6T , SC , Normally Open , 28VDC , NO TTL , DC to 5 GHz , DSUB-15

电气参数 Electrical Characteristics:

参数Parameter	条件Condition
频率范围 Frequency range	DC-5GHz
阻抗 Impedance	50 Ω
开关模式 Operation mode	Normally open
开关顺序 Switch sequence	Break before make
切换时间 Switching time	15 ms max
机械寿命 Mechanical life	1 million min
额定电压 Rated voltage	12 24 28 VDC
工作电流 Operating current at 23 °C	240 140 120 mA




射频特性 RF Specifications:

频率范围 FREQUENCY RANGE(GHz)	DC-4	4-5
插入损耗 INSERTION LOSS (MAX) dB	0.3	0.4
隔离度 ISOLATION (MIN) dB	70	60
电压驻波比 V.S.W.R. (MAX)	1.25:1	1.45:1


环境和物理特性 Environmental And Physical Characteristics:

参数Parameter	条件 Condition
工作温度范围 Operating temperature range	-25°C to +65°C(Standard) -55°C to +85°C(Optional)
振动 Sine vibration(Operating)	20-2000Hz , 10g
冲击 Shocks(Non Operating)	50g / 11ms, ½ sine
射频接口 RF Connector type	SC Female

外形尺寸 Outline Drawing: Unit: mm

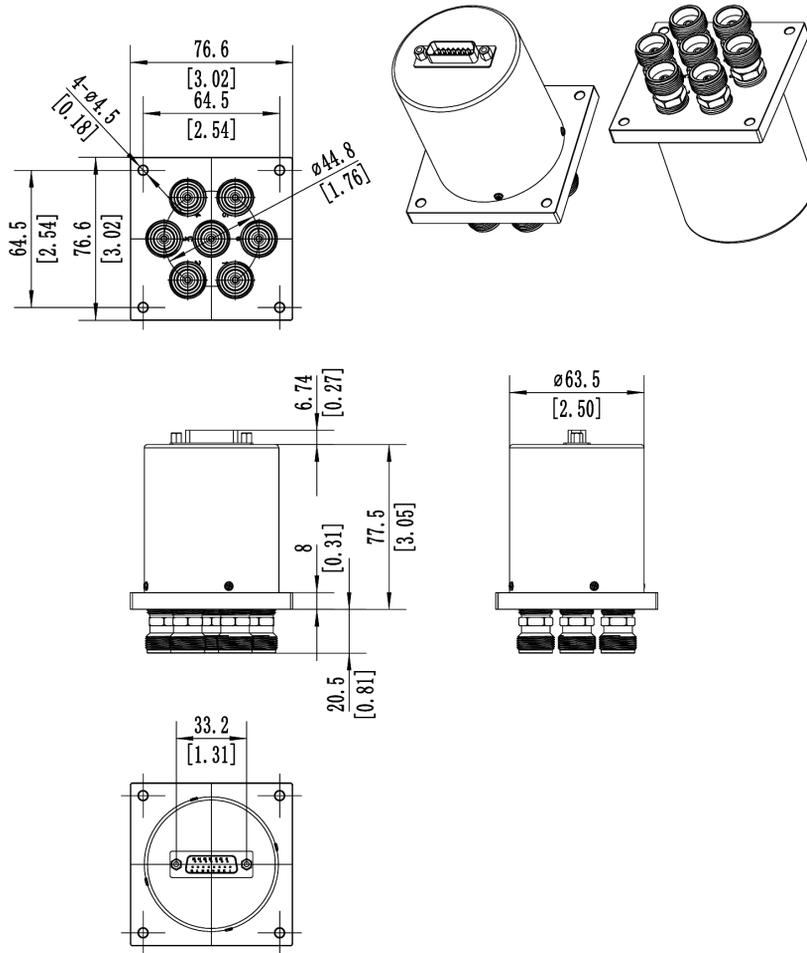

原理图 Schematic:

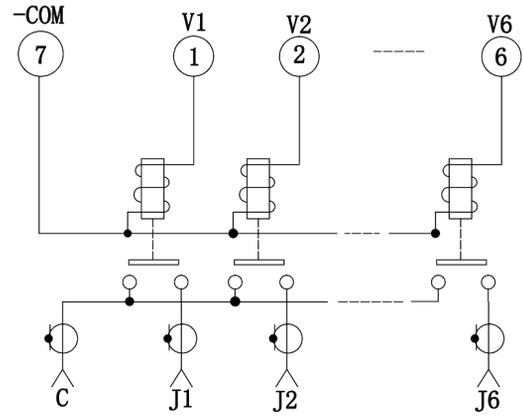


功率曲线图 Average power:

This graph is based on the following conditions:

- Ambient temperature: + 25 °C
- Sea level
- V.S.W.R.: 1 and cold switching

针脚定义 Pin Definition:

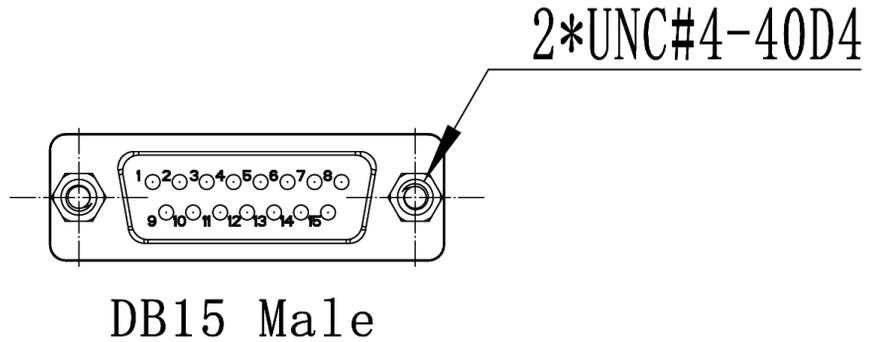

15 PIN D-SUB		RF Connect Used
Pin NO.	Function	SP6T
1	V1	1
2	V2	2
3	V3	3
4	V4	4
5	V5	5
6	V6	6
7	-COM	
8-15	UNUSED	

标准型号 Part Number:

标准型号 Part Number

1P6T

额定电压
Rated Voltage

12VDC

可选项 Option

-S

R16-CN12005-D