

1P6T , Terminated , Coaxial Switches

R16-KL12T40-DTI, Coaxial Switches, 1P6T, K, Latching, 12VDC, TTL, DC to 40GHz, DSUB-25, Terminated, Electronic Type Indicator

R16-KL24T40-DTI, Coaxial Switches, 1P6T, K, Latching, 24VDC, TTL, DC to 40GHz, DSUB-25, Terminated, Electronic Type Indicator

R16-KL28T40-DTI, Coaxial Switches, 1P6T, K, Latching, 28VDC, TTL, DC to 40GHz, DSUB-25, Terminated, Electronic Type Indicator

电气参数 Electrical Characteristics:

参数 Parameter	条件 Condition
频率范围 Frequency range	DC-40 GHz
阻抗 Impedance	50 Ω
开关模式 Operation mode	Latching
开关顺序 Switch sequence	Break before make
切换时间 Switching time	15 ms max
机械寿命 Mechanical life	1 million min
TTL input	0-0.8 V(OFF), 2.4-5 V(ON)
负载功率 Termination power CW	0.5W
额定电压 Rated voltage	12 24 28 VDC
工作电流 Operating current at 23 °C	350 180 160 mA
指示灯额定值 Indicator rating	Electronic Type Indicator Max withstand voltage: 60VDC Max current capacity: 100mA Max "ON" resistance: 16Ω Note: VDCi and COM- must be connected to operate.




射频特性 RF Specifications:

频率范围 FREQUENCY RANGE(GHz)	DC-6	6-12	12-18	18-32	32-40
插入损耗 INSERTION LOSS (MAX) dB	0.3	0.4	0.5	0.8	1.3
隔离度 ISOLATION (MIN) dB	70	60	60	55	50
电压驻波比 V.S.W.R. (MAX)	1.3:1	1.4:1	1.5:1	1.9:1	2.1:1


环境和物理特性 Environmental And Physical Characteristics:

参数 Parameter	条件 Condition
工作温度范围 Operating temperature range	-25°C to +65°C(Standard) -55°C to +85°C(Optional)
振动 Sine vibration(Operating)	20-2000Hz , 10G RMS
冲击 Shocks(Non Operating)	50g / 11msec, ½ sine
射频接口 RF Connector type	2.92mm Female

外形尺寸 Outline Drawing: Unit: mm

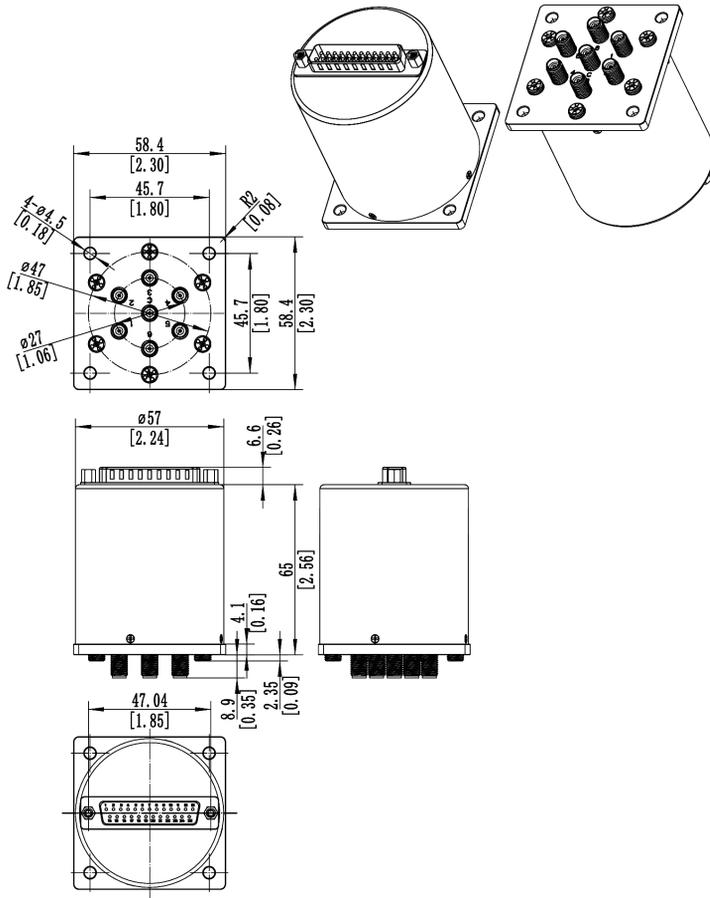

原理图 Schematic:

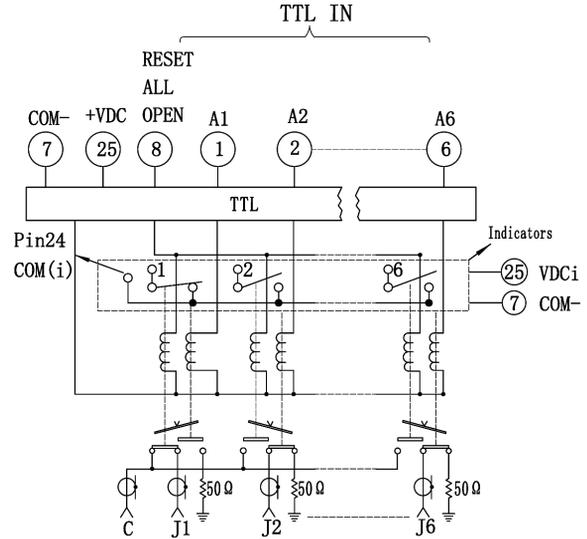

备注*: 指示灯电路IC参数:


Parameter	Rating	Units
Blocking Voltage	60	V _p
Load Current	100	mA _{rms} / mA _{DC}
On-Resistance (max)	16	Ω
LED Current to operate	1	mA

功率曲线图 Average power:

This graph is based on the following conditions:

- Ambient temperature: + 25 °C
- Sea level
- V.S.W.R.: 1 and cold switching

引脚定义 Pin Definition:

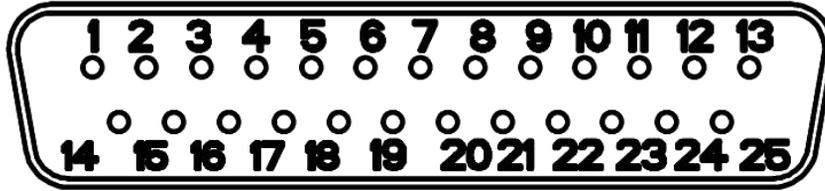

25 PIN D-SUB		RF Connect Used
Pin NO.	Function	SP6T
1	A1 (TTL IN)	1
2	A2(TTL IN)	2
3	A3(TTL IN)	3
4	A4(TTL IN)	4
5	A5(TTL IN)	5
6	A6(TTL IN)	6
7	COM-	电源接地端
8	A(TTL IN), RESET ALL OPEN	复位端子
18	1(IND.)	J1-COM
19	2(IND.)	J2-COM
20	3(IND.)	J3-COM
21	4(IND.)	J4-COM
22	5(IND.)	J5-COM
23	6(IND.)	J6-COM
24	COMi(IND.)(V+)	典型应用：接+3VDC(指示灯输入电压) (没有串联外接电阻时，16Ω内阻) 见备注*
25	+VDC/VDCi	电源额定电压
9-17	UNUSED	

标准型号 Part Number:

标准型号 Part Number

1P6T

额定电压
Rated Voltage

可选项 Option

典型曲线 Typical Performance Data:

