

SP12T Coaxial Switches

R1C-SN12T18-D, Coaxial Switches, 1P12T, SMA, Normally Open, 12VDC, TTL, DC to 18 GHz, DSUB-15
 R1C-SN24T18-D, Coaxial Switches, 1P12T, SMA, Normally Open, 24VDC, TTL, DC to 18 GHz, DSUB-15
 R1C-SN28T18-D, Coaxial Switches, 1P12T, SMA, Normally Open, 28VDC, TTL, DC to 18 GHz, DSUB-15

电气参数 Electrical Characteristics:

参数Parameter	条件Condition
频率范围 Frequency range	DC-18GHz
阻抗 Impedance	50 Ω
开关模式 Operation mode	Normally open
开关顺序 Switch sequence	Break before make
切换时间 Switching time	15 ms max
机械寿命 Mechanical life	1 million min
TTL input	0-0.8 V(OFF), 2.4-5 V(ON)
额定电压 Rated voltage	12 24 28 VDC
工作电流 Operating current at 23 °C	290 150 140 mA




射频特性 RF Specifications:

频率范围 FREQUENCY RANGE(GHz)	DC-4	4-8	8-12.4	12.4-18
插入损耗INSERTION LOSS (MAX) dB	0.2	0.4	0.6	0.6
隔离度 ISOLATION (MIN) dB	70	65	60	60
电压驻波比 V.S.W.R. (MAX)	1.2:1	1.4:1	1.5:1	1.6:1

环境和物理特性 Environmental And Physical Characteristics:

参数Parameter	条件 Condition
工作温度范围 Operating temperature range	-25°C to +65°C(Standard) -55°C to +85°C(Optional)
振动 Sine vibration(Operating)	20-2000Hz , 10g
冲击 Shocks(Non Operating)	50g / 11ms, ½ sine
射频接口 RF Connector type	SMA Female

针脚定义 Pin Definition:

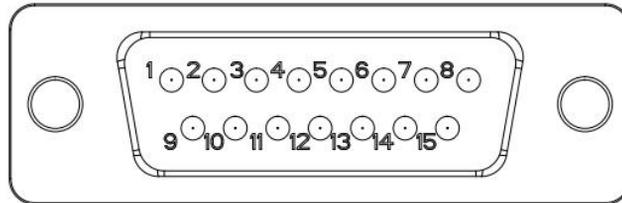

15 PIN D-SUB		RF Connect Used
Pin NO.	Function	1P12T
1	A1(TTL IN)	1
2	A2(TTL IN)	2
3	A3(TTL IN)	3
4	A4(TTL IN)	4
5	A5(TTL IN)	5
6	A6(TTL IN)	6
7	A7(TTL IN)	7
8	A8(TTL IN)	8
9	A9(TTL IN)	9
10	A10(TTL IN)	10
11	A11(TTL IN)	11
12	A12(TTL IN)	12
13	-COM	
14	UNUSED	
15	+VDC	

标准型号 Part Number:

标准型号 Part Number

1P12T

额定电压
 Rated Voltage

可选项 Option