

## DPDT Coaxial Switches

R22-SF12018-D , Coaxial Switches , DPDT , SMA , Failsafe , 12VDC , DC to 18 GHz , DSUB-9

R22-SF24018-D , Coaxial Switches , DPDT , SMA , Failsafe , 24VDC , DC to 18 GHz , DSUB-9

R22-SF28018-D , Coaxial Switches , DPDT , SMA , Failsafe , 28VDC , DC to 18 GHz , DSUB-9

### 电气参数 Electrical Characteristics:

参数Parameter	条件Condition
频率范围 Frequency range	DC-18GHz
阻抗 Impedance	50 Ω
开关模式 Operation mode	Failsafe
开关顺序 Switch sequence	Break before make
切换时间 Switching time	15 ms max
机械寿命 Mechanical life	2 million min
额定电压 Rated voltage	12      24      28 VDC
工作电流 Operating current at 23 °C	380      200      180 mA




### 射频特性 RF Specifications:

频率范围 FREQUENCY RANGE(GHz)	DC-6	6-12	12-18
插入损耗INSERTION LOSS (MAX) dB	0.2	0.25	0.4
隔离度 ISOLATION (MIN) dB	70	70	60
电压驻波比 V.S.W.R. (MAX)	1.3:1	1.4:1	1.5:1


### 环境和物理特性 Environmental And Physical Characteristics:

参数Parameter	条件 Condition
工作温度范围 Operating temperature range	-25°C to +65°C(Standard ) -55°C to +85°C(Optional)
振动 Sine vibration(Operating)	20-2000Hz , 10g
冲击 Shocks(Non Operating)	50g / 11ms, ½ sine
射频接口 RF Connector type	SMA Female

## 外形尺寸 Outline Drawing: Unit: mm

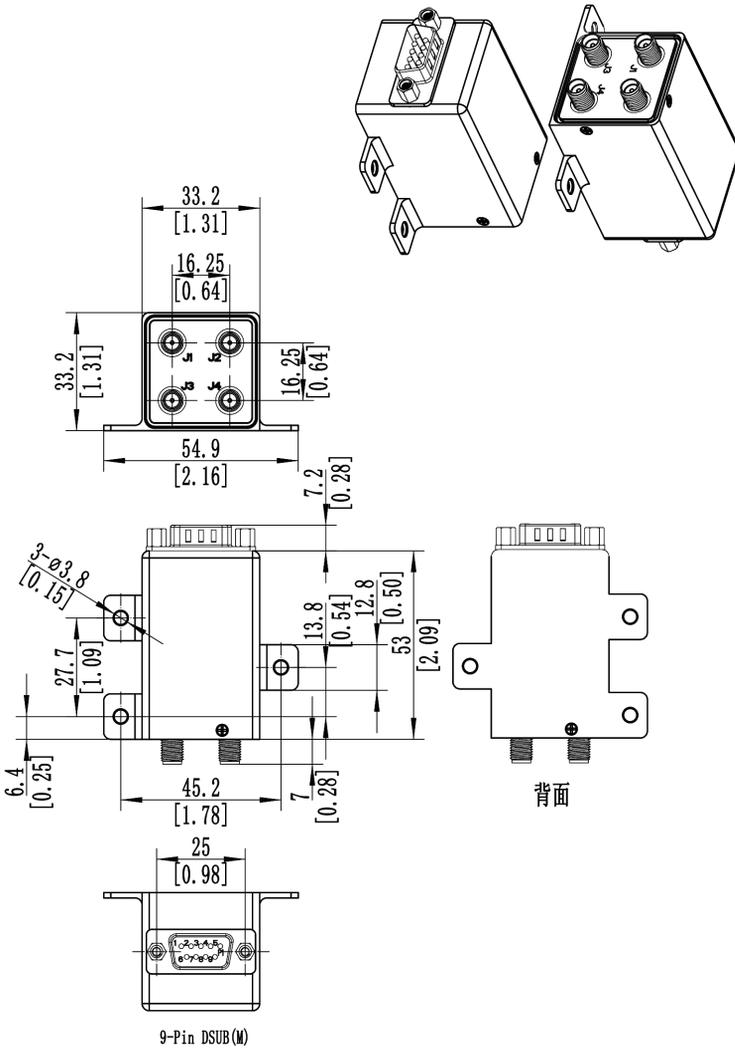

## 原理图 Schematic:

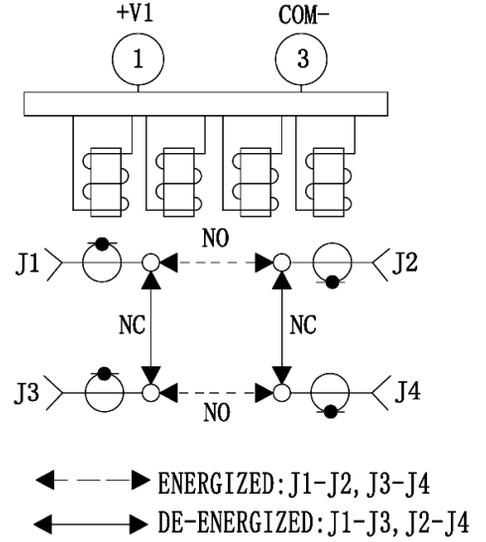


## 功率曲线图 Average power:

This graph is based on the following conditions:

- Ambient temperature: + 25 °C
- Sea level
- V.S.W.R.: 1 and cold switching

## 针脚定义 Pin Definition:

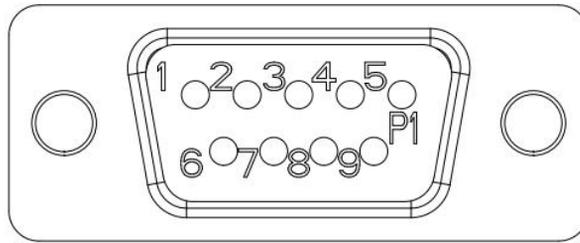

9 PIN D-SUB		RF Connect Used
Pin NO.	Function	DPDT
1	+V1	NO:J1-J2,J3-J4
	0	NC:J1-J3,J2-J4
2	UNUSED	
3	COM-	
4-9	UNUSED	

## 标准型号 Part Number:

标准型号 Part Number

驱动电压

可选项 Option

DPDT

Actuator voltage


R22-SF12018-D

12VDC


-S

## 典型曲线 Typical Performance Data:

### VSWR

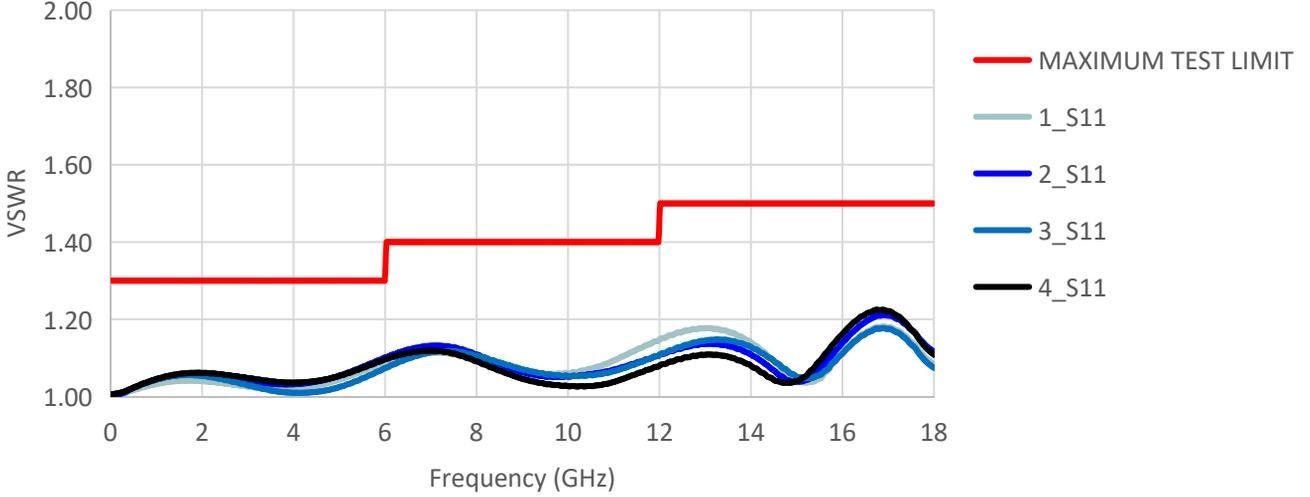

### INSERTION LOSS

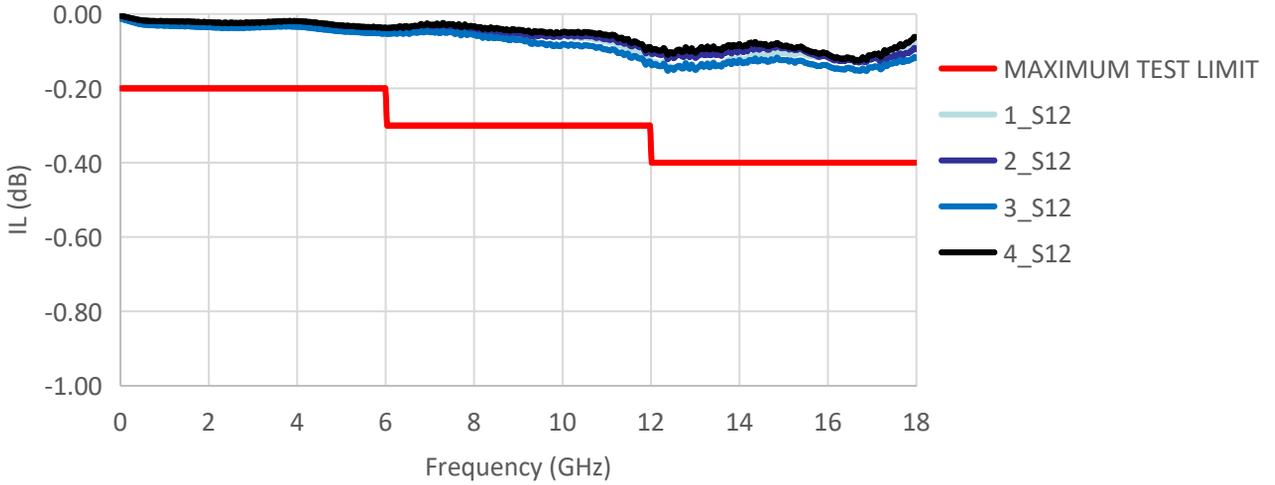

### ISOLATION

