

## Part No: RAXXA10-S-26.5


### SMA Attenuators • Male to Female • DC – 26.5 GHz - 10 W

#### 电气特性 ELECTRICAL

- **Frequency Range** DC – 26.5 GHz
- **Attenuation (dB)**
  - 1 through 9 ± 1.0 dB
  - 10 .....± 1.0 dB
  - 20 ..... ± 1.0 dB
  - 30 ..... ± 1.2 dB
  - 40 ..... ± 1.2 dB
- **VSWR (MAX)**
  - DC – 4 GHz..... 1.15 : 1
  - 4 – 8 GHz.....1.20 : 1
  - 8 – 12.4 GHz.....1.25 : 1
  - 12.4 – 18 GHz.....1.30 : 1
  - 18– 26.5 GHz.....1.35 : 1
- **Impedance** 50 Ohms
- **RF Power Nominal** 10 Watts Average at 25°C  
PEAK: 1000 Watts  
(5 μSec Pulse Width , 0.5% Duty Cycle)

#### 机械特性 MECHANICAL

- **Temperature Range** -55°C - +125°C
- **Connectors** Brass ,Nickel Plated
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Black, Finned Aluminum
- **Insulators** PTFE, Virgin Electrical Grade

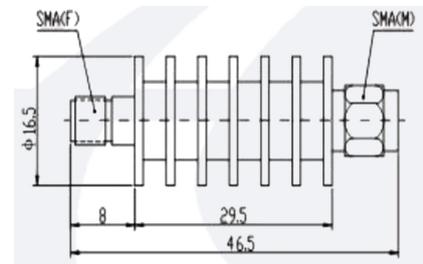

Unit : mm

#### 订货信息 ORDER