

**Part No: RAXXA100-S-1**

**SMA Attenuators • Male to Female • DC – 1 GHz - 100 W**

**电气特性 ELECTRICAL**


- **Frequency Range** DC – 1 GHz
- **Attenuation (dB)**
  - 10 .....± 0.4 dB
  - 20 ..... ± 0.4 dB
  - 30 ..... ± 0.4 dB
  - 40 ..... ± 0.4 dB
- **VSWR (MAX)** DC – 1 GHz..... 1.15 : 1
- **Impedance** 50 Ohms
- **RF Power Nominal** 100 Watts Average at 25°C  
 PEAK: 10000 Watts  
 (5 μSec Pulse Width , 1% Duty Cycle)

**机械特性 MECHANICAL**

- **Temperature Range** -55°C - +125°C
- **Connectors** Brass ,Nickel Plated
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Black, Finned Aluminum
- **Insulators** PTFE, Virgin Electrical Grade

**订货信息 ORDER**

Model Number : RAXXA100-S-1  
 └──────────┬──────────┘  
 dB Value

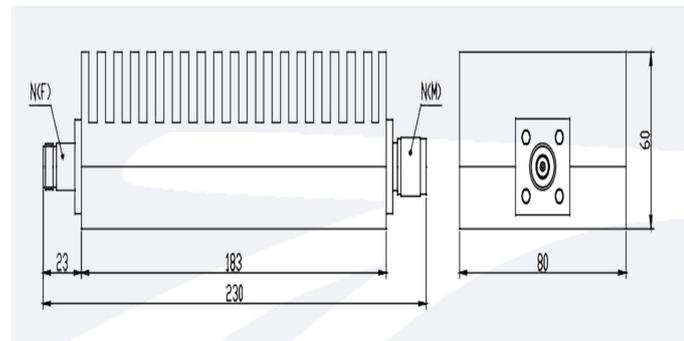

**Connector: SMA and N are optional.**  
**Unit:mm**