

## Part No: RAXXA25-S-26.5


### SMA Attenuators • Male to Female • DC – 26.5 GHz - 25 W

#### 电气特性 ELECTRICAL

- **Frequency Range** DC – 26.5 GHz
- **Attenuation (dB)**
  - 10 ..... ± 1.2 dB
  - 20 ..... ± 1.2 dB
  - 30 ..... ± 1.2 dB
  - 40 ..... ± 1.2 dB
- **VSWR (MAX)**
  - DC – 8 GHz ..... 1.20 : 1
  - 8 – 12.4 GHz ..... 1.25 : 1
  - 12.4 – 18 GHz ... 1.30 : 1
  - 18 – 26.5 GHz ... 1.35 : 1
- **Impedance** 50 Ohms
- **RF Power Nominal** 25 Watts Average at 25°C  
 PEAK: 1000 Watts  
 (5 μSec Pulse Width , 2.5% Duty Cycle)

#### 机械特性 MECHANICAL

- **Temperature Range** -55°C - +125°C
- **Connectors** Brass ,Nickel Plated
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Black, Finned Aluminum
- **Insulators** PTFE, Virgin Electrical Grade

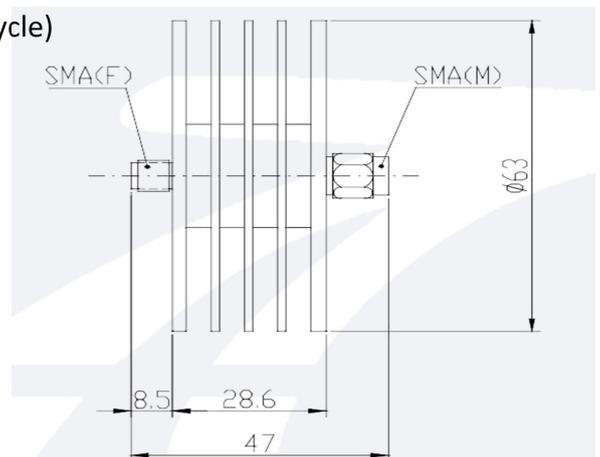

Unit:mm

#### 订货信息 ORDER

Model Number : RAXXA25-S-26.5  
 └──────────┬──────────┘  
 dB Value