

## Part No: RAXXA300-N-1


### N Attenuators • Male to Female • DC – 1 GHz - 300 W

#### 电气特性 ELECTRICAL

- **Frequency Range** DC – 1 GHz
- **Attenuation (dB)**
  - 10 .....± 1.0 dB
  - 20 .....± 1.0 dB
  - 30 ..... ± 0.75 dB
  - 40 through 50... ± 0.75 dB
- **VSWR (MAX)** DC – 1 GHz..... 1.20 : 1
- **Impedance** 50 Ohms
- **RF Power Nominal** 300 Watts Average at 25°C  
PEAK: 10000 Watts  
(5 μSec Pulse Width , 3% Duty Cycle)

#### 机械特性 MECHANICAL

- **Temperature Range** -55°C - +125°C
- **Connectors** Brass ,Nickel Plated
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Black, Aluminum
- **Insulators** PTFE, Virgin Electrical Grade

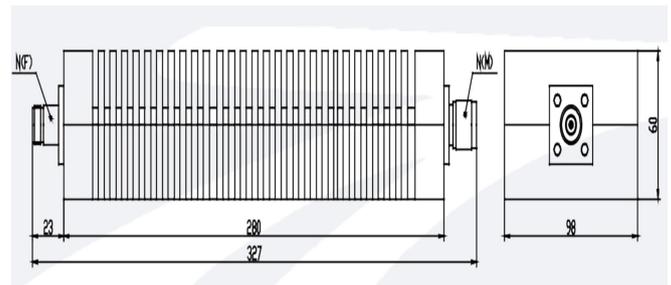

Connector: N and DIN 7/16 are optional.  
Unit:mm

#### 订货信息 ORDER

Model Number : RAXXA300-N-1