

## Part No: RAXXA5-N-12.4


### N Attenuators • Male to Female • DC – 12.4 GHz - 5 W

#### 电气特性 ELECTRICAL

- **Frequency Range** DC – 12.4 GHz
- **Attenuation (dB)**
  - 1 through 9 ± 0.7dB
  - 10 .....± 0.7 dB
  - 20 ..... ± 0.7 dB
  - 30 ..... ± 0.7 dB
  - 40 ..... ± 0.75 dB
  - 50 ..... ± 0.75 dB
- **VSWR (MAX)**
  - DC – 8 GHz..... 1.30 : 1
  - 8– 12.4 GHz.....1.35 : 1
- **Impedance** 50 Ohms
- **RF Power Nominal** 5 Watts Average at 25°C  
PEAK: 500 Watts  
(5 μSec Pulse Width , 1% Duty Cycle)

#### 机械特性 MECHANICAL

- **Temperature Range** -55°C - +125°C
- **Connectors** Brass ,Nickel Plated
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Aluminum
- **Insulators** PTFE, Virgin Electrical Grade

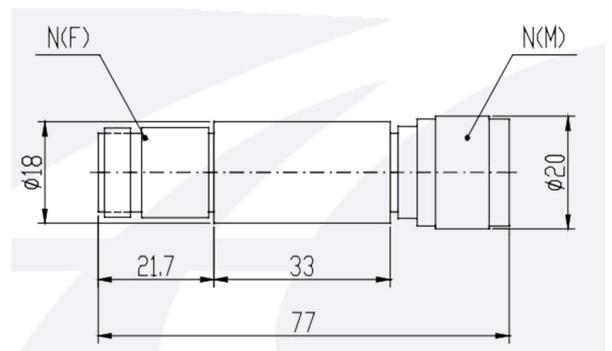

Unit : mm

#### 订货信息 ORDER

Model Number : RAXXA5-N-12.4  
└──────────┬──────────  
                  dB Value