

## Part No: RAXXA50-N-12.4


### N Attenuators • Male to Female • DC – 12.4 GHz - 50 W

#### 电气特性 ELECTRICAL

- **Frequency Range** DC – 12.4 GHz
- **Attenuation (dB)**
  - 1 through 9 ± 1.0 dB
  - 10 .....± 1.0 dB
  - 20 ..... ± 1.0 dB
  - 30 ..... ± 0.8 dB
  - 40 ..... ± 1.2 dB
- **VSWR (MAX)** DC – 12.4 GHz..... 1.30 : 1
- **Impedance** 50 Ohms
- **RF Power Nominal** 50 Watts Average at 25°C  
 PEAK: 1000 Watts  
 (5 μSec Pulse Width , 5% Duty Cycle)

#### 机械特性 MECHANICAL

- **Temperature Range** -55°C - +125°C
- **Connectors** Brass ,Nickel Plated
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Black, Finned Aluminum
- **Insulators** PTFE, Virgin Electrical Grade

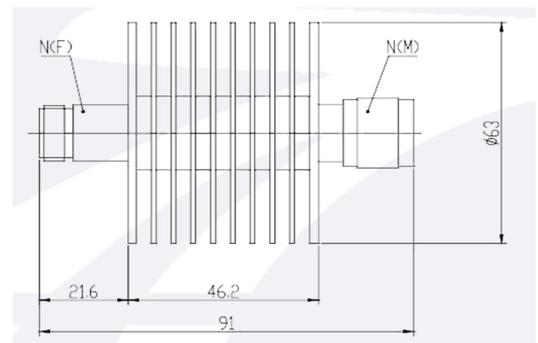

Unit:mm

#### 订货信息 ORDER

Model Number : RAXXA50-N-12.4  
 └──────────┬──────────  
 dB Value